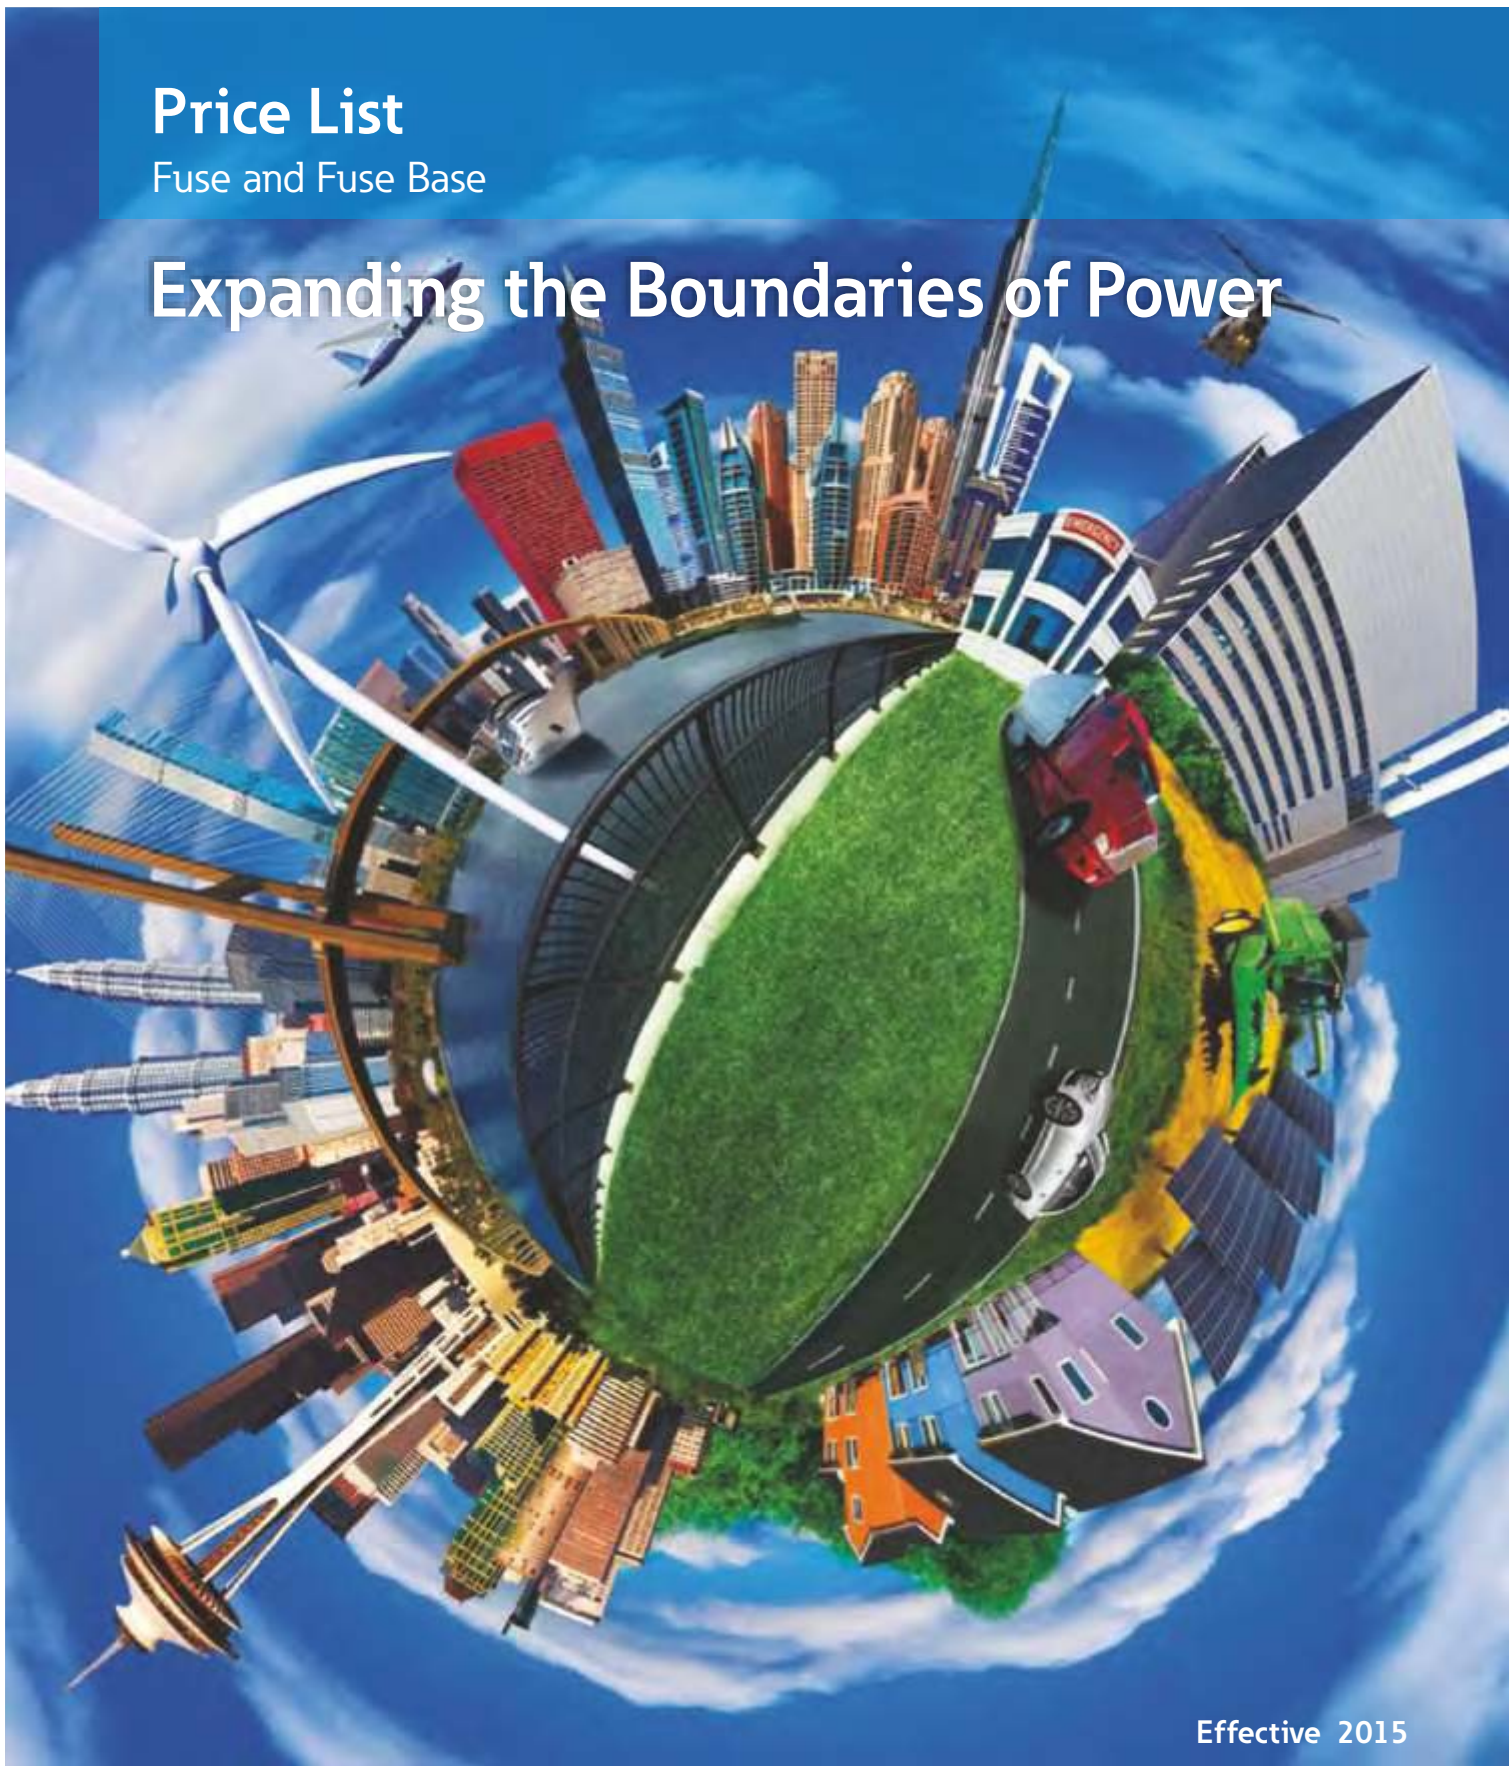


Price List

Fuse and Fuse Base

Expanding the Boundaries of Power



Effective 2015

EATON
Powering Business Worldwide

Bussmann[®]
by **EATON**



'15

2015 Price List

PRICE LIST EFFECTIVE - 2015

Contents

● Low Voltage Fuse Links & Fuse Holders	
● HRC Fuse Fittings & Bases	1
● Low Voltage BS88 Type of Fuse Links	1 - 4
● Low Voltage NH Type of Fuse Links	5
● Highspeed Voltage Fuse Links	
● BS 88 Semi Conductor Protection, Highspeed Fuses	6 - 7
● Accessories for BS 88 Highspeed Fuses	8
● Medium Voltage Fuse Links	
● BS Type HV Fuses for use in Air	9 - 10
● HV Fuses for use in Oil	11
● HV Fuses for use in PT/VT & Auxillary Transformer	11
● HV Fuses for use in for HV Motor Circuits	12
● Fuse Range	
● Low Voltage BS88 Type of Fuse Links Range	13 - 16
● Highspeed Voltage Fuse Links Range	17
● Medium Voltage Fuse Links	18

PRICE :

- For items marked (#), prices available on request.
- Prices are subject to change without prior notice.
- This Price list supersedes all previous Price Lists.
- Price prevailing at the time of dispatch will only be applicable.
- For prices of any special products not listed here, please contact us
- Prices are Ex-Pondicherry, exclusive of packing, forwarding, freight & insurance.
- Company reserves the right to issue amendments which may arise due to any errors in the Price List

TAXES AND DUTIES

- All prices in this document are inclusive of currently prevailing Excise Duty / CVD but exclusive of any other taxes, Surcharge, Duties, levies, Octroi, etc.
- Prices are also exclusive of CST / Local taxes, which will be charged as applicable at the time of supply.
- Any variation in Excise Duty and Sales Tax at the time of supply will be charged extra.

Order Postponment or cancellation is not allowed. For all shipments, orders to be in multiples of the carton quantity.

All dimensions in this price list are in millimetres (mm) and all prices are in Rupees (₹) per individual item unless stated otherwise.

Please visit our website at www.cooperbussmann.com for further information.

This price list is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products or discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this price list. Once a product has been selected, it should be tested by the user in all possible applications. The information contained in this price list is correct at the time of publication, but we reserve the right to supply products differing in construction or performance.

Pricelist - 2015

HRC Fuse Fittings & Fuse Bases Fuse Base for LV NH Type of Fuse

IS / BS Size Reference	Description	No. of Poles	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
00 / C00	Fuse Base	Single	160NHG00B/ 100NHG000B	160	SB00-PB	690	301	3	3	O
00 / C00	Top Cover	Single	160NHG00B/ 100NHG000B	160	TC00	690	47	3	3	O
00 / C00	Terminal Shield	Single	160NHG00B/ 100NHG000B	160	IPB00	690	47	3	3	O
00 / C00	Terminal Shield	Single	160NHG00B/ 100NHG000B	160	TS00	690	46	3	3	O

Fuse Fittings for LV BS Type of Fuses

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
F1	Clip on	Front (#)	F06/NSD	20	FA20	500	117	10	10	N
		Front	F06/NSD	32	FA32	500	130	10	10	N
		Back	F06/NSD	32	FB32	500	168	10	10	N
		Busbar	F06/NSD	32	FD32	500	146	10	10	O
A2	Offset Bolted	Front	H07/F07/AAO	32	HA32	500	249	5	5	N
		Busbar	H07/F07/AAO	32	HD32	500	306	5	5	O
A3	Offset Bolted	Front	TO7/BAO/KO7	63	KA63	500	326	5	5	N
		Busbar	TO7/BAO/KO7	63	KD63	500	371	5	5	N
A4	Offset Bolted	Front	L14/KL14/M14	100/125	LA125	500	894	1	1	N
		Busbar	L14/KL14/M14	100/125	LD125	500	915	1	1	N

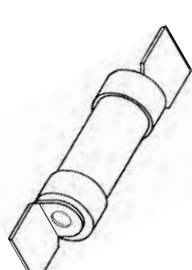
Safelock Range - Screw as wells as DIN Rail fixing (#)

F1	Clip on	Front	F06/NSD	32	32NNSF	550	136	10	10	N
		Front	ESD	63	63ENSF	415	968	5	5	O

(#) - Available on request - Busbar / Stud Mounting
- In White / Grey Body

Low Voltage BS88 Type of Fuses


Clip on Type (Refer table below for Rated Voltage and Breaking Capacity)

240 / 550 Vac		BS Size	Tag Type	Rated Voltage (Volts)	Breaking Capacity (kA)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	E1	SMALL CLIP ON	240	33	2	SSD2	52	20	20	O	SS
			240	33	4	SSD4	52	20	20	O	
			240	33	6	SSD6	52	20	20	O	
			240	33	10	SSD10	52	20	20	O	
			240	33	16	SSD16	58	20	20	O	
			240	33	20	SSD20	58	20	20	O	
			240	33	25	SSD25	64	20	20	O	
	F1	CLIP ON TAG	550	80	2	NSD2	46	20	20	N	NS
			550	80	4	NSD4	46	20	20	N	
			550	80	6	NSD6	46	20	20	N	
			550	80	10	NSD10	46	20	20	N	
			550	80	16	NSD16	54	20	20	N	
			550	80	20	NSD20	54	20	20	N	
			550	80	25	NSD25	54	20	20	N	
	F2	LONG CLIP ON	550	80	2	ESD2	76	20	20	O	ES
			550	80	4	ESD4	76	20	20	O	
			550	80	6	ESD6	76	20	20	O	
			550	80	10	ESD10	76	20	20	O	
			550	80	16	ESD16	76	20	20	O	
			550	80	20	ESD20	76	20	20	O	
550			80	25	ESD25	80	20	20	O		
550	80	32	ESD32	80	20	20	O				
550	80	40	ESD40	103	20	20	O				
550	80	50	ESD50	103	20	20	O				
550	80	63	ESD63	107	20	20	O				

N - Normal; O - On Order

Low Voltage BS88 Type of Fuses



Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA

660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFF SET TAG	660 / 690	2	2H07-660	73	20	20	O	TIA
		CLOSED SLOT	660 / 690	4	4H07-660	73	20	20	O	
			660 / 690	6	6H07-660	73	20	20	O	
			660 / 690	10	10H07-660	87	20	20	N	
			660 / 690	16	16H07-660	92	20	20	N	
			660 / 690	20	20H07-660	92	20	20	O	
			660 / 690	25	25H07-660	92	20	20	N	
	A3	OFF SET TAG	660 / 690	35	35K07-660	155	20	20	N	TIS
		CLOSED SLOT	660 / 690	40	40K07-660	155	20	20	O	
			660 / 690	50	50K07-660	155	20	20	N	
			660 / 690	63	63K07-660	155	20	20	N	
	A4	OFF SET TAG	660 / 690	80	80L14-660	271	10	10	O	TCP
		CLOSED SLOT	660 / 690	100	100L14-660	271	10	10	N	
	-	OFF SET TAG	660 / 690	125	125M14-660	478	5	5	O	TFP
CLOSED SLOT		660 / 690	160	160M14-660	478	5	5	O		
		660 / 690	200	200M14-660	478	5	5	O		

N - Normal; O - On Order

Low Voltage BS88 Type of Fuses

Bolted Type, 660/690 Volts range, Breaking Capacity - 80kA



660 / 690 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660 / 690	80	80LO9-660	302	10	10	O	TC
		SINGLE SLOT	660 / 690	100	100LO9-660	302	10	10	N	
	B2	CENTRE TAG	660 / 690	125	125MO9-660	460	5	5	O	TF
		SINGLE SLOT	660 / 690	160	160MO9-660	469	5	5	O	
			660 / 690	200	200MO9-660	474	5	5	O	
	B3	CENTRE TAG	660 / 690	250	250NO9-660	799	1	1	N	TKF
SINGLE SLOT		660 / 690	315	315NO9-660	799	1	1	O		
	C1	CENTRE TAG	660 / 690	355	355P11-660	1399	1	1	O	TMF
		DOUBLE SLOT	660 / 690	400	400P11-660	1352	1	1	O	
	C2	CENTRE TAG	660 / 690	450	450R11-660	1569	1	1	O	TM
		DOUBLE SLOT	660 / 690	500	500R11-660	1569	1	1	O	
			660 / 690	560	560R11-660	1893	1	1	O	TTM
			660 / 690	630	630R11-660	1893	1	1	O	

N - Normal; O - On Order

Pricelist - 2015

Low Voltage BS88 Type of Fuses


Bolted Type, **550 Volts** range, Breaking Capacity - 80kA

550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	NITD2	63	20	20	O	NIT
		OPEN SLOT	550	4	NITD4	63	20	20	O	
			550	6	NITD6	63	20	20	O	
			550	10	NITD10	63	20	20	O	
			550	16	NITD16	63	20	20	O	
			550	20	NITD20	63	20	20	O	
			550	25	NITD25	74	20	20	O	
			550	32	NITD32	74	20	20	O	
	A2	OFFSET TAG	550	2	AAO2	57	20	20	O	TSA
		CLOSED SLOT	550	4	AAO4	57	20	20	O	
			550	6	AAO6	57	20	20	O	
			550	10	AAO10	57	20	20	O	
			550	16	AAO16	57	20	20	O	
			550	20	AAO20	60	20	20	O	
			550	25	AAO25	60	20	20	O	
			550	32	AAO32	60	20	20	N	
	A3	OFFSET TAG	550	35	BAO35	104	20	20	O	TSS
		CLOSED SLOT	550	40	BAO40	104	20	20	O	
	(@)	550	50	BAO50	104	20	20	N		
		550	63	BAO63	108	20	20	N	TSDS	
-	OFFSET TAG	550	80	OSD80	206	20	20	O		
	CLOSED SLOT	550	100	OSD100	206	20	20	O		

Note : (@) - K07 - Open Slot, BAO - Closed Slot
N - Normal; O - On Order

Low Voltage BS88 Type of Fuses

Bolted Type, **550 Volts** range, Breaking Capacity - 80kA



550 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	C2	CENTRE TAG	550	450	FF450	1156	1	1	O	TST
		DOUBLE SLOT	550	500	FF500	1156	1	1	O	
			550	560	FF560	1506	1	1	O	
			550	630	FF630	1506	1	1	O	
	C3	CENTRE TAG	550	710	GF710	2402	1	1	O	TLM
		DOUBLE SLOT	550	800	GF800	2402	1	1	O	
	-	CENTRE TAG	550	710	GG710	#	1	3	O	TLT
		DOUBLE SLOT	550	800	GG800	#	1	3	O	
			550	1000	GG1000	#	1	3	O	
			550	1250	GG1250	#	1	3	O	

- Price Available on request

N - Normal; O - On Order

Low Voltage BS88 Type of Fuses



Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	-	OFFSET TAG	550	2	EITD2	74	20	20	O	EIT
		OPEN SLOT	550	4	EITD4	74	20	20	O	
			550	6	EITD6	74	20	20	O	
			550	10	EITD10	74	20	20	O	
			550	16	EITD16	74	20	20	O	
			550	20	EITD20	74	20	20	O	
			550	25	EITD25	85	20	20	O	
			550	32	EITD32	85	20	20	N	
			415	40	EITD40	101	20	20	O	
			415	50	EITD50	101	20	20	O	
		415	63	EITD63	111	20	20	N		
	A4	OFFSET TAG	415	32	CEO32	187	10	10	O	TSD
		CLOSED SLOT	415	40	CEO40	187	10	10	O	
			415	50	CEO50	187	10	10	O	
			415	63	CEO63	187	10	10	O	
			415	80	CEO80	187	10	10	O	
			415	100	CEO100	187	10	10	N	
	-	OFFSET TAG	415	125	DEO125	286	5	5	N	TSFP
		CLOSED SLOT	415	160	DEO160	286	5	5	N	
			415	200	DEO200	286	5	5	O	
	B1	CENTRE TAG	415	80	CD80	215	10	10	O	TSDC
		SINGLE SLOT	415	100	CD100	215	10	10	O	
	B2	CENTRE TAG	415	125	DD125	265	5	5	N	TSF
		SINGLE SLOT	415	160	DD160	276	5	5	N	
			415	200	DD200	276	5	5	N	
	B3 / B4	CENTRE TAG	415	250	ED250	424	1	1	N	TSF/ TSK
		SINGLE SLOT								
	B3/B4	CENTRE TAG	415	315	ED315	496	1	1	N	TSK
		SINGLE SLOT								
B4	CENTRE TAG	415	355	ED355	771	1	1	O	TSK/ TSM	
	SINGLE SLOT	415	400	ED400	771	1	1	O		

N - Normal; O - On Order

Low Voltage BS88 Type Range of Fuses

Bolted Type, 415 Volts range, Breaking Capacity - 80kA

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	-	CENTRE TAG	415	355	355SN11(S)	821	1	1	N	TSMS
		SINGLE SLOT	415	400	400SN11(S)	821	1	1	N	
	-	CENTRE TAG	415	450	450SP11(S)	937	1	1	O	TSTS
		SINGLE SLOT	415	500	500SP11(S)	937	1	1	O	
	-	CENTRE TAG	415	560	560SR11(S)	1763	1	1	O	TSLS
		SINGLE SLOT	415	630	630SR11(S)	1929	1	1	O	
		415	710	710SR11(S)	-	1	1	O		
		415	800	800SR11(S)	2132	1	1	O		
	C1	CENTRE TAG	415	355	EF355	979	1	1	O	TSM
		DOUBLE SLOT	415	400	EF400	979	1	1	O	
	-	CENTRE TAG	415	710	710SR11	2269	1	1	O	TSL
		DOUBLE SLOT	415	800	800SR11	2269	1	1	O	

N - Normal; O - On Order

Pricelist - 2015

Low Voltage DIN Type, NH Dual Indicator Fuse Links

Rated Voltage **500 Volts** AC, Breaking Capacity - 120 kA



500 Vac	Size	Rated Current (A)	Class gL-gG with Dual Indication & Insulated Grips	Unit Price (Rs.)	Class gL-gG with Dual Indication & Metallic Grips	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class		
	000	2	2NHG000BI	343	2NHG000B	270	3	3	O		
		4	4NHG000BI	343	4NHG000B	270	3	3	O		
		6	6NHG000BI	343	6NHG000B	270	3	3	N		
		10	10NHG000BI	343	10NHG000B	270	3	3	N		
		16	16NHG000BI	343	16NHG000B	270	3	3	N		
		20	20NHG000BI	343	20NHG000B	270	3	3	N		
		25	25NHG000BI	343	25NHG000B	270	3	3	N		
		32	32NHG000BI	343	32NHG000B	270	3	3	N		
		35	35NHG000BI	343	35NHG000B	270	3	3	N		
		40	40NHG000BI	343	40NHG000B	270	3	3	O		
		50	50NHG000BI	343	50NHG000B	270	3	3	N		
		63	63NHG000BI	343	63NHG000B	270	3	3	N		
		80	80NHG000BI	376	80NHG000B	291	3	3	N		
		100	100NHG000BI	376	100NHG000B	291	3	3	N		
			00	125	125NHG00BI	497	125NHG00B	392	3	3	N
				160	160NHG00BI	541	160NHG00B	411	3	3	N
50	-			-	50NHG0B	527	3	3	O		
63	-			-	63NHG0B	527	3	3	O		
80	-			-	80NHG0B	527	3	3	O		
100	-			-	100NHG0B	527	3	3	O		
	0s	125	-	-	125NHG0B	527	3	3	O		
		160	-	-	160NHG0B	532	3	3	O		
		200	-	-	200NHG0SB	-	3	3	N		
		01@	100	100NHG01BI	711	100NHG01B	560	3	3	O	
			125	125NHG01BI	733	125NHG01B	577	3	3	O	
			160	160NHG01BI	746	160NHG01B	588	3	3	N	
	1	200	200NHG1BI	752	200NHG1B	593	3	3	N		
		224	224NHG1BI	792	224NHG1B	603	3	3	O		
		250	250NHG1BI	859	250NHG1B	634	3	3	N		
		315#	-	-	315NHG1B*	775	3	3	O		
		02	35	35NHG02BI	1037	35NHG02B	789	3	3	O	
40	40NHG02BI		1037	40NHG02B	789	3	3	O			
50	50NHG02BI		1037	50NHG02B	789	3	3	O			
63	63NHG02BI		1037	63NHG02B	789	3	3	O			
80	80NHG02BI		1037	80NHG02B	789	3	3	O			
100	100NHG02BI		1037	100NHG02B	789	3	3	O			
125	125NHG02BI		1037	125NHG02B	789	3	3	O			
160	160NHG02BI		1037	160NHG02B	789	3	3	O			
200	200NHG02BI		1112	200NHG02B	824	3	3	O			
224	224NHG02BI		1112	224NHG02B	824	3	3	O			
2	250	250NHG02BI	1112	250NHG02B	835	3	3	O			
	315	315NHG2BI	1112	315NHG2B	835	3	3	N			
	355	355NHG2BI	1128	355NHG2B	846	3	3	O			
	400	400NHG2BI	1128	400NHG2B	846	3	3	N			
	03	250	250NHG03BI	1709	250NHG03B	1312	3	3	O		
315		315NHG03BI	1709	315NHG03B	1312	3	3	O			
355		355NHG03BI	1709	355NHG03B	1312	3	3	O			
400		400NHG03BI	1709	400NHG03B	1312	3	3	O			
	3	425	-	-	425NHG3B	1310	3	12	O		
		450	-	-	450NHG3B	1310	3	3	O		
		500	-	-	500NHG3B	1344	3	3	N		
		630	-	-	630NHG3B	1369	3	3	N		
		800*#	-	-	800NH3GB*#	-	3	3	O		

@ Size "0", 6A - 63A on request
Size "01", 6A - 80A on request





* Available in Single Indicator type only
Rated Voltage 440V

N - Normal; O - On Order

High Speed Fuses

Semi Conductor Protection Fuses - BS 88 Type

Rated Voltage 240 Volts AC , Breaking Capacity - 200 kA



240 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	240	6	6LCT	167	20	20	O
	240	10	10LCT	167	20	20	O
	240	12	12LCT	167	20	20	O
	240	16	16LCT	167	20	20	O
	240	20	20LCT	167	20	20	O
	240	25	25LET	314	10	10	N
	240	32	32LET	314	10	10	O
	240	35	35LET	314	10	10	O
	240	50	50LET	314	10	10	N
	240	63	63LET	314	10	10	O
	240	80	80LET	323	10	10	N
	240	100	100LET	323	10	10	N
	240	125	125LET	347	10	10	O
	240	160	160LET	397	10	10	N
	240	160	160LMT	558	1	1	N
	240	200	200LMT	558	1	1	O
	240	250	250LMT	731	1	1	N
	240	315	315LMT	1088	1	1	O
	240	355	355LMT	1088	1	1	O
	240	400	400LMT	1088	1	1	O
	240	450	450LMT	1383	1	1	O
	240	400	400LMMT	1575	1	1	O
	240	500	500LMMT	1575	1	1	O
	240	630	630LMMT	2045	1	1	O
	240	710	710LMMT	2141	1	1	O
	240	800	800LMMT	2527	1	1	O
	240	900	900LMMT	2800	1	1	O

N - Normal; O - On Order

High Speed Fuses

Semi Conductor Protection Fuses - BS 88 Type

Rated Voltage 690 Volts AC , Breaking Capacity - 200 kA

690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	690	6	6CT	182	20	20	O
	690	10	10CT	182	20	20	N
	690	12	12CT	182	20	20	O
	690	16	16CT	195	20	20	N
	690	20	20CT	195	20	20	N
	690	25	25ET	383	10	10	N
	690	32	32ET	383	10	10	N
	690	35	35ET	383	10	10	N
	690	40	40ET	383	10	10	N
	690	45	45ET	383	10	10	N
	690	56	56ET	425	10	10	N
	690	63	63ET	425	10	10	N
	690	80	80ET	425	10	10	N








N - Normal; O - On Order

Pricelist - 2015

High Speed Fuses

Semi Conductor Protection Fuses - BS88 Type

Rated Voltage **690 Volts** AC / 240 Volts DC, Breaking Capacity - 200 kA

690 Vac	Voltage (V)	Rating (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	690	35	35FE	419	10	10	O
	690	40	40FE	419	10	10	O
	690	45	45FE	419	10	10	O
	690	50	50FE	419	10	10	O
	690	63	63FE	451	10	10	N
	690	71	71FE	451	10	10	O
	690	80	80FE	451	10	10	N
	690	90	90FE	619	10	10	N
	690	100	100FE	619	10	10	N
	690	90	90EET	920	5	5	N
	690	110	110EET	920	5	5	N
	690	140	140EET	920	5	5	N
	690	160	160EET	920	5	5	N
	690	100	100FEE	960	5	5	N
	690	120	120FEE	1061	5	5	N
	690	140	140FEE	1097	5	5	N
	690	160	160FEE	1097	5	5	O
	690	180	180FEE	1097	5	5	O
	690	200	200FEE	1097	5	5	N
	690	160	160MT	755	1	1	N
	690	180	180MT	755	1	1	O
	690	200	200MT	997	1	1	N
	690	250	250MT	1006	1	1	N
	690	280	280MT	1087	1	1	O
	690	315	315MT	1406	1	1	N
	690	355	355MT	-	-	1	1
	690	180	180MMT	1456	1	1	N
	690	200	200MMT	1530	1	1	N
	690	225	225MMT	1530	1	1	N
	690	280	280MMT	1530	1	1	N
	690	315	315MMT	1615	1	1	N
	690	355	355MMT	1846	1	1	N
	690	400	400MMT	1887	1	1	N
	690	450	450MMT	1887	1	1	O
	690	500	500MMT	1983	1	1	N
	690	560	560MMT	2425	1	1	O
	690	630	630MMT	2521	1	1	N
	690	710	710MMT	2861	1	1	N
		690	180	180FM	814	1	1
690		200	200FM	949	1	1	N
690		225	225FM	988	1	1	O
690		250	250FM	988	1	1	N
690		280	280FM	1095	1	1	O
690		315	315FM	1494	1	1	O
690		350	350FM	1494	1	1	N
	690	400	400FMM	1709	1	1	O
	690	450	450FMM	1709	1	1	O
	690	500	500FMM	1993	1	1	O
	690	550	550FMM	2094	1	1	O
	690	630	630FMM	2441	1	1	N
	690	700	700FMM	2689	1	1	O

N - Normal; O - On Order

High Speed Fuses
Semi Conductor Protection Fuses - BS88 Type
Accessories

Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	Unit Price (₹)	Pack Quantity	Delivery Class
EC-250	For use with LET	669	1 set	O
EC-600	For use with ET, EET, FE & FEE	703	1 set	O
MC-250	For use with LMT & LMMT	671	1 set	O
MC-600	For use with FM & FMM	705	1 set	O
MC-700	For use with MT & MMT	705	1 set	O

Catalogue No. / Type	Micro - Switch	Unit Price (₹)	Pack Quantity	Delivery Class
MAI	Micro-switch & adaptor assly.	862	1	O
MBI	Micro-switch & adaptor assly.	#	1	O

Catalogue No. / Type	Fuse Clips for Fitting Trip Indicator	Unit Price (₹)	Pack Quantity	Delivery Class
ECLIP	For use with LET, ET, EET, FE & FEE	274	10	O
MCLIP	For use with LMT, LMMT, MT, MMT, FM & FMM	349	10	O
CL1	Back connected Clip for use with Trip Indicator fuse	603	1 set	O

Catalogue No. / Type	Trip Indicators for Fuse Links	Unit Price (₹)	Pack Quantity	Delivery Class
TI250-BT	For use with LET, LMT & LMMT	#	-	O
TI600-BT	For use with ET, EET, FE & FEE, FM & FMM	#	-	O
TI700-BT	For use with MT & MMT	#	-	O
TI1100-BT	For replacement only	#	-	O
TI1500-BT	For replacement only	#	-	O
TI2000-BT	For replacement only	#	-	O

- Price Available on request
 N - Normal; O - On Order

Low Voltage DIN Type, NH Dual Indicator Fuse Accessories





Catalogue No. / Type	Trip Indicator accessory pack (each consists of 1 pair of clip & appropriate size Trip Indicator Fuse Link)	Unit Price (₹)	Pack Quantity	Delivery Class
SD1-S	NH FUSE BASE SD1-S	995	3	O
SD2-S	NH FUSE BASE SD2-S	1,120	3	O
SD3-S	NH FUSE BASE SD3-S	1,707	3	O
SD4-S	NH FUSE BASE SD4-S	4,390	1	N

N - Normal; O - On Order

Pricelist - 2015

High Voltage Fuses



British Standard Type Range of Fuses for use in Air

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	Air (Bus Duct / Distribution)	3.3 / 3.6	25	10	3.6ADGHC10	3327	1	1	O
		3.3 / 3.6	25	15	3.6ADGHC15	3327	1	1	O
		3.3 / 3.6	25	20	3.6ADGHC20	3327	1	1	O
		3.3 / 3.6	25	25	3.6ADGHC25	3327	1	1	O
		3.3 / 3.6	25	30	3.6ADGHC30	3327	1	1	O
		3.3 / 3.6	25	40	3.6ADGHC40	3327	1	1	O
		3.3 / 3.6	25	45	3.6ADGHC45	3327	1	1	O
		3.3 / 3.6	25	50	3.6ADGHC50	3327	1	1	O
		3.3 / 3.6	25	60	3.6ADGHC60	3327	1	1	O
		3.3 / 3.6	25	70	3.6ADGHC70	3327	1	1	O
		3.3 / 3.6	25	75	3.6ADGHC75	3687	1	1	O
		3.3 / 3.6	25	80	3.6ADGHC80	3687	1	1	O
3.3 / 3.6	25	90	3.6ADGHC90	3760	1	1	O		
3.3 / 3.6	25	100	3.6ADGHC100	3760	1	1	O		
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	10	7.2BDGHC10	3375	1	1	O
		6.6 / 7.2	40	16	7.2BDGHC16	3375	1	1	O
		6.6 / 7.2	40	20	7.2BDGHC20	3375	1	1	O
		6.6 / 7.2	40	25	7.2BDGHC25	3375	1	1	O
		6.6 / 7.2	40	31.5	7.2BDGHC31.5	3375	1	1	O
		6.6 / 7.2	40	35.5	7.2BDGHC35.5	3375	1	1	O
		6.6 / 7.2	40	40	7.2BDGHC40	3375	1	1	O
		6.6 / 7.2	40	45	7.2BDGHC45	3432	1	1	O
		6.6 / 7.2	40	50	7.2BDGHC50	3432	1	1	O
		6.6 / 7.2	40	56	7.2BDGHC56	3432	1	1	O
		6.6 / 7.2	40	60	7.2BDGHC60	3432	1	1	O
		6.6 / 7.2	40	63	7.2BDGHC63	3650	1	1	O
		6.6 / 7.2	40	71	7.2BDGHC71	3674	1	1	O
		6.6 / 7.2	40	80	7.2BDGHC80	3674	1	1	O
	Air (Bus Duct / Distribution)	6.6 / 7.2	40	50	7.2AHGHC50	3847	1	1	O
		6.6 / 7.2	40	60	7.2AHGHC60	3847	1	1	O
		6.6 / 7.2	40	75	7.2AHGHC75	3847	1	1	O
		6.6 / 7.2	40	90	7.2AHGHC90	3847	1	1	O
		6.6 / 7.2	40	100	7.2AHGHC100	3847	1	1	O
		6.6 / 7.2	40	112	7.2AHGHC112	5200	1	1	O
		6.6 / 7.2	40	125	7.2AHGHC125	5200	1	1	O
		6.6 / 7.2	40	140	7.2AHGHC140	5695	1	1	O
		6.6 / 7.2	40	150	7.2AHGHC150	5695	1	1	O
		6.6 / 7.2	40	160	7.2AHGHC160	5695	1	1	O
		6.6 / 7.2	40	60	7.2AHGHB60	4179	1	1	O
		6.6 / 7.2	40	65	7.2AHGHB65	4399	1	1	O
		6.6 / 7.2	40	75	7.2AHGHB75	4399	1	1	O
		6.6 / 7.2	40	90	7.2AHGHB90	4654	1	1	O
		6.6 / 7.2	40	100	7.2AHGHB100	4654	1	1	O
		6.6 / 7.2	40	112	7.2AHGHB112	5651	1	1	O
		6.6 / 7.2	40	120	7.2AHGHB120	5651	1	1	O
		6.6 / 7.2	40	125	7.2AHGHB125	5651	1	1	O
		6.6 / 7.2	40	140	7.2AHGHB140	6171	1	1	O
		6.6 / 7.2	40	150	7.2AHGHB150	6171	1	1	O
6.6 / 7.2	40	160	7.2AHGHB160	6171	1	1	O		
	Air (Bus Duct / Distribution)	6.6 / 7.2	20	30	7.2AEFMO30	4145	1	1	O
		6.6 / 7.2	20	35	7.2AEFMO35	4145	1	1	O
		6.6 / 7.2	20	40	7.2AEFMO40	4145	1	1	O
		6.6 / 7.2	20	50	7.2AEFMO50	4181	1	1	O
		6.6 / 7.2	20	56	7.2AEFMO56	4181	1	1	O
		6.6 / 7.2	20	63	7.2AEFMO63	4181	1	1	O
		6.6 / 7.2	20	71	7.2AEFMO71	4207	1	1	O
		6.6 / 7.2	20	80	7.2AEFMO80	4207	1	1	O
		6.6 / 7.2	20	90	7.2AEFMO90	4295	1	1	O

(#) - Available on request N - Normal; O - On Order

High Voltage Fuses

British Standard Type Range of Fuses for use in Air

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	Air (Bus Duct / Distribution)	11 / 12	40	6.3	12BDGHC6.3	3885	1	1	O
		11 / 12	40	10	12BDGHC10	3885	1	1	O
		11 / 12	40	16	12BDGHC16	3885	1	1	O
		11 / 12	40	20	12BDGHC20	3916	1	1	O
		11 / 12	40	25	12BDGHC25	3916	1	1	O
		11 / 12	40	31.5	12BDGHC31.5	3916	1	1	O
		11 / 12	40	35.5	12BDGHC35.5	3916	1	1	O
		11 / 12	40	40	12BDGHC40	3945	1	1	O
		11 / 12	40	45	12BDGHC45	3945	1	1	O
	Air (Bus Duct / Distribution)	11 / 12	40	50	12BDGHC50	3945	1	1	O
		11 / 12	40	56	12AHGHC56	4005	1	1	O
		11 / 12	40	63	12AHGHC63	4005	1	1	O
		11 / 12	40	70	12AHGHC70	4042	1	1	O
		11 / 12	40	80	12AHGHC80	4493	1	1	O
		11 / 12	40	90	12AHGHC90	4493	1	1	O
		11 / 12	40	100	12AHGHC100	4493	1	1	O
		11 / 12	40	56	12AHGHB56	4305	1	1	O
		11 / 12	40	63	12AHGHB63	4305	1	1	O
		11 / 12	40	65	12AHGHB65	4368	1	1	O
		11 / 12	40	70	12AHGHB70	4368	1	1	O
		11 / 12	40	80	12AHGHB80	4734	1	1	O
	Air (Bus Duct / Distribution)	11 / 12	40	90	12AHGHB90	4734	1	1	O
		11 / 12	40	100	12AHGHB100	4734	1	1	O
		11 / 12	40	112	12AKGHD112	10967	3	3	O
		11 / 12	40	125	12AKGHD125	10967	3	3	O
		11 / 12	20	3.7	12AEFMO3.7	4423	1	1	O
		11 / 12	20	12	12AEFMO12	4383	1	1	O
		11 / 12	20	15	12AEFMO15	4383	1	1	O
		11 / 12	20	16.8	12AEFMO16.8	4383	1	1	O
		11 / 12	20	22	12AEFMO22	4411	1	1	O
		11 / 12	20	26.6	12AEFMO26.6	4411	1	1	O
		11 / 12	20	30	12AEFMO30	4411	1	1	O
11/12	20	33.75	12AEFMO33.75	4411	1	1	O		
11 / 12	20	37.5	12AEFMO37.5	4411	1	1	O		
11 / 12	20	42	12AEFMO42	4454	1	1	O		
11 / 12	20	47.25	12AEFMO47.25	4454	1	1	O		

(#) - Available on request



N - Normal; O - On Order

For ordering HV Air Fuse with Single Slot -
1 - For BD ___ & BF ___ series, add "S" at the end of the cat. number. For ex : For ordering 100A, 7.2AHGHC catalogue no. will be "7.2AHGHC100S"
2 - For AH ___ series, replace "C" at end with "B" For ex : For ordering 100A, 7.2AHGH series, catalogue no. will be "7.2AHGHB100"

Pricelist - 2015

High Voltage Fuses




For use in Oil

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	Oil	6.6 / 7.2	45	100	7.2 OEFMA 100	3900	1	1	O
	Oil	11 / 12	40	6.3	12 OEFMA 6.3	4123	3	3	O
		11 / 12	40	10	12 OEFMA 10	4123	1	1	O
		11 / 12	40	16	12 OEFMA 16	4123	1	1	O
		11 / 12	40	20	12 OEFMA 20	4132	1	1	O
		11 / 12	40	25	12 OEFMA 25	4132	1	1	O
		11 / 12	40	31.5	12 OEFMA 31.5	4132	1	1	O
		11 / 12	40	40	12 OEFMA 40	4145	1	1	O
		11 / 12	40	50	12 OEFMA 50	4145	1	1	O
		11 / 12	40	63	12 OEFMA 63	4145	1	1	O
11 / 12		40	71	12 OHFMA 71	4280	3	3	O	
11 / 12		40	80	12 OHFMA 80	4280	3	3	O	
		11 / 12	40	16	12 OHGMA 16	5032	3	3	O
		11 / 12	40	25	12 OHGMA 25	5059	3	3	O
		11 / 12	40	31.5	12 OHGMA 31.5	5059	3	3	O
		11 / 12	40	40	12 OHGMA 40	5085	3	3	O
		11 / 12	40	50	12 OHGMA 50	5085	3	3	O
		11 / 12	40	63	12 OHGMA 63	5085	3	3	O
		11 / 12	40	80	12 OHGMA 80	5085	3	3	O
		11 / 12	40	90	12 OHGMA 90	5278	3	3	O
	11 / 12	40	100	12 OHGMA 100	5769	3	3	O	
	11 / 12	40	125	12 OLGMA 125	6485	3	3	O	

N - Normal; O - On Order

High Voltage Fuses



For use in PT / VT & Auxilliary Transformer

	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	VT / PT	3.3 / 3.6	50	3.15	3.6 ABWNA 3.15	881	1	1	O
		3.3 / 3.6	50	6.3	3.6 ABWNA 6.3	881	1	1	O
		6.6 / 7.2	45	3.15	7.2 ABCNA 3.15	959	1	1	N
		6.6 / 7.2	45	6.3	7.2 ABCNA 6.3	959	1	1	O
		6.6 / 7.2	45	3.15	7.2 ABWNA 3.15	945	1	1	O
		6.6 / 7.2	45	6.3	7.2 ABWNA 6.3	945	1	1	O
		11 / 12	45	3.15	12 ABCNA 3.15	971	1	1	N
		22 / 24	25	3.15	24 ABGNA 3.15	2296	1	1	O
	VT / PT	3.3 / 3.6	50	3.15	3.6 ABWNS 3.15	947	1	1	O
		6.6 / 7.2	45	3.15	7.2 ABCNS 3.15	1050	1	1	O
		11 / 12	45	3.15	12 ABCNS 3.15	1128	1	1	O
	VT / PT	3.3 / 3.6	50	3.15	3.6 ABWNT 3.15	1085	1	1	O
		6.6 / 7.2	45	3.15	7.2 ABCNT 3.15	991	1	1	O
		11 / 12	45	3.15	12 ABCNT 3.15	1142	1	1	O

N - Normal; O - On Order

High Voltage Fuses

British Standard Type Range of Fuses for use in Motor Circuits

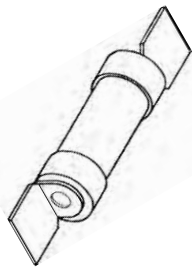
	Application (used in)	Voltage (Kv)	Breaking Capacity (kA)	Ratings (Amps)	Catalogue No. / Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	For use in MV Motor Circuits	3.6	50	5	3.6WDOHS5	3985	1	1	O
		3.6	50	16	3.6WDOHS16	3985	1	1	O
		3.6	50	20	3.6WDOHS20	3985	1	1	O
		3.6	50	25	3.6WDOHS25	3985	1	1	O
		3.6	50	32	3.6WDOHS32	3949	1	1	O
		3.6	50	40	3.6WDOHS40	3949	1	1	O
		3.6	50	50	3.6WDOHS50	3949	1	1	O
		3.6	50	63	3.6WDOHS63	3949	1	1	O
		3.6	50	80	3.6WDOHS80	3949	1	1	O
		3.6	50	50	3.6WDFMO50	5497	1	1	O
		3.6	50	63	3.6WDFMO63	5497	1	1	O
		3.6	50	80	3.6WDFMO80	5497	1	1	O
		3.6	50	100	3.6WDFMO100	5497	1	1	O
		3.6	50	100	3.6WFFMO100	6832	1	1	O
		3.6	50	140	3.6WFFMO140	7616	1	1	O
		3.6	50	160	3.6WFFMO160	7616	1	1	O
		3.6	50	200	3.6WFFMO200	8258	1	1	O
		3.6	50	250	3.6WFFMO250	9355	1	1	O
		3.6	50	315	3.6WFFMO315	10808	1	1	O
		3.6	50	350	3.6WFFMO350	11962	1	1	O
3.6	50	450	3.6WFFMO450	17983	1	1	O		
3.6	50	630	3.6WKFMO630	23056	1	1	O		
	For use in MV Motor Circuits	7.2	45	50	7.2WFNMO50	7629	1	1	O
		7.2	45	63	7.2WFNMO63	7629	1	1	O
		7.2	45	80	7.2WFNMO80	8852	1	1	O
		7.2	45	100	7.2WFNMO100	8852	1	1	O
		7.2	45	125	7.2WFNMO125	10238	1	1	O
		7.2	45	160	7.2WFNMO160	10238	1	1	O
		7.2	45	200	7.2WFNMO200	11720	1	1	O
		7.2	45	250	7.2WFNMO250	13616	1	1	O
		7.2	45	50	7.2WFQMO50	8397	1	1	O
		7.2	45	63	7.2WFQMO63	8397	1	1	O
		7.2	45	80	7.2WFQMO80	9216	1	1	O
		7.2	45	100	7.2WFQMO100	9696	1	1	O
		7.2	45	125	7.2WFQMO125	11206	1	1	O
		7.2	45	160	7.2WFQMO160	11206	1	1	O
		7.2	45	200	7.2WFQMO200	12646	1	1	O
		7.2	45	250	7.2WFQMO250	15657	1	1	O
		7.2	45	350	7.2WKQMO350	21142	1	1	O
		7.2	45	400	7.2WKQMO400	35630	1	1	O

N - Normal; O - On Order

Pricelist - 2015

BS Fuselink Type SS/NS/ES


Clip-on Fuselinks with Staggered Tags-415 V AC

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	E1	SMALL CLIP ON	415	2	SS2	54	20	20	O	SSD
		TAG	415	4	SS4	54	20	20	O	
			415	6	SS6	54	20	20	O	
			415	10	SS10	54	20	20	O	
			415	16	SS16	61	20	20	O	
			415	20	SS20	61	20	20	O	
	F1	CLIP ON	415	2	NS2	52	20	20	O	NSD
		TAG	415	4	NS4	52	20	20	O	
			415	6	NS6	52	20	20	O	
			415	10	NS10	52	20	20	O	
			415	16	NS16	57	20	20	O	
			415	20	NS20	57	20	20	O	
			415	25	NS25	57	20	20	O	
			415	32	NS32	57	20	20	O	
	F2	LONG CLIP ON	415	2	ES2	81	20	20	O	ESD
		TAG	415	4	ES4	81	20	20	O	
			415	6	ES6	81	20	20	O	
			415	10	ES10	81	20	20	O	
			415	16	ES16	81	20	20	O	
			415	20	ES20	81	20	20	O	
			415	25	ES25	85	20	20	O	
			415	32	ES32	85	20	20	O	
			415	36	ES36	85	20	20	O	
			415	50	ES50	109	20	20	O	
		415	63	ES63	113	20	20	O		

N - Normal; O - On Order

Type EIT




Fuse link with Offset Tags

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	Cat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
		OFFSET TAG	415	2	EIT2	78	20	20	O	EITD
		OPEN SLOT	415	4	EIT4	78	20	20	O	
			415	6	EIT6	78	20	20	O	
			415	10	EIT10	78	20	20	O	
			415	16	EIT16	78	20	20	O	
			415	20	EIT20	78	20	20	O	
			415	25	EIT25	90	20	20	O	
			415	32	EIT32	90	20	20	O	
			415	36	EIT36	107	20	20	O	
			415	50	EIT50	107	20	20	O	
			415	63	EIT63	118	20	20	O	

N - Normal; O - On Order

Type - TSA / TSS / TSDS / TSD / TSFP


Fuse link with Offset Tags Closed Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	415	6	TSA6	60	20	20	O	AAO
		CLOSED SLOT	415	10	TSA10	60	20	20	O	
			415	16	TSA16	60	20	20	O	
			415	20	TSA20	63	20	20	O	
			415	25	TSA25	63	20	20	O	
			415	32	TSA32	63	20	20	O	
	A3	OFFSET TAG	415	36	TSS36	114	20	20	O	BAO
		CLOSED SLOT	415	50	TSS50	114	20	20	O	
			415	63	TSS63	114	20	20	O	
	-	OFFSET TAG	415	80	TSDS80	218	10	10	O	OSD
		CLOSED SLOT	415	100	TSDS100	218	10	10	O	
			415	125	TSDS125	245	10	10	O	
	A4	OFFSET TAG	415	80	TSD80	198	10	10	O	CEO
		CLOSED SLOT	415	100	TSD100	198	10	10	O	
			415	125	TSD125	270	10	10	O	
	-	OFFSET TAG	415	125	TSFP125	303	10	10	O	DEO
		CLOSED SLOT	415	160	TSFP160	303	10	10	O	
		415	200	TSFP200	303	10	10	O		

N - Normal; O - On Order

Type - TSDC \ TSK \ TSMS \ TSTS \ TSLs

Fuse Links with Centre Tag Single Slot


415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class		
	B1	Centre Tag	415	80	TSDC80	228	10	10	O	CD	
		Single Slot	415	100	TSDC100	228	10	10	O		
	B3	Centre Tag	415	250	TSK250	515	10	10	O	ED	
		Single Slot	415	315	TSK315	525	10	10	O		
	C1	Centre Tag	415	355	TSMS355	745	1	1	O	SN11(S)	
		Single Slot	415	400	TSMS400	868	1	1	O		
	-	Centre Tag	415	450	TSTS450	992	1	1	O	SP11(S)	
		Single Slot	415	500	TSTS500	992	1	1	O		
	-	Centre Tag	415	560	TSLs560	1865	1	1	O	SR11(S)	
		Single Slot	415	630	TSLs630	2041	1	1	O		
				415	710	TSLs710	2125	1	1	O	SR11(S)
				415	750	TSLs750	2125	1	1	O	
				415	800	TSLs800	2125	1	1	O	

N - Normal; O - On Order

Pricelist - 2015

Type - TSM \ TST \ TSL


Fuse Links with Centre Tags Double Slot

415 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	415	355	TSM355	1165	1	1	O	EF
		Double Slot	415	400	TSM400	1165	1	1	N	
	C2	Centre Tag	415	450	TST450	1254	1	1	O	FF
		Double Slot	415	500	TST500	1254	1	1	O	
	C3	Centre Tag	415	560	TSL560	1865	1	1	O	SR11
			Double Slot	415	630	TSL630	2401	1	1	
			415	710	TSL710	2401	1	1	O	
			415	750	TSL750	2362	1	1	O	
			415	800	TSL800	2379	1	1	O	

N - Normal; O - On Order

Type - TM \ TTM \ TLM


Fuse Links with Centre Tags Double Slot

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	C1	Centre Tag	660	355	TM355	1416	1	1	O	SP11
		Double Slot	660	400	TM400	1431	1	1	O	
	C2	Centre Tag	660	450	TTM450	1659	1	1	O	R11
			Double Slot	660	500	TTM500	1659	1	1	
			660	560	TTM560	1945	1	1	O	
	C3	Centre Tag	660	630	TTM630	2020	1	1	O	GF
			Double Slot	660	630	TLM630	2541	1	1	
			660	710	TLM710	2541	1	1	O	
			660	750	TLM750	2541	1	1	O	
			660	800	TLM800	2541	1	1	O	

N - Normal; O - On Order


Type TIA \ TIS \ TCP \ TFP

Fuse with Offset Tags (2 hole fixing - Bolted)

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	A2	OFFSET TAG	660	2	TIA2	67	10	10	O	HO7
		CLOSED SLOT	660	4	TIA4	67	10	10	O	
			660	6	TIA6	92	10	10	O	
			660	10	TIA10	92	10	10	O	
			660	16	TIA16	92	10	10	O	
			660	20	TIA20	92	10	10	O	
			660	25	TIA25	92	10	10	O	
			660	32	TIA32	92	10	10	O	
	A3	OFFSET TAG	660	36	TIS36	145	10	10	O	KO7
		CLOSED SLOT	660	40	TIS40	145	10	10	O	
			660	50	TIS50	164	10	10	O	
			660	63	TIS63	164	10	10	O	
	A4	OFFSET TAG	660	80	TCP80	296	6	6	O	L14
		CLOSED SLOT	660	100	TCP100	296	6	6	O	
			660	125	TFP125	505	3	3	O	M14
			660	160	TFP160	505	3	3	O	
			660	200	TFP200	505	3	3	O	

N - Normal; O - On Order

Type - TC \ TF \ TKF
Fuse with Central Tags

660 Vac	BS Size	Tag Type	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class	
	B1	CENTRE TAG	660	80	TC80	319	6	6	O	LO9
		SINGLE SLOT	660	100	TC100	319	6	6	O	
			660	80	102TC80	320	6	6	O	
			660	100	102TC100	320	6	6	O	
	B3	CENTRE TAG	660	125	TF125	486	3	3	O	MO9
		SINGLE SLOT	660	160	TF160	496	3	3	O	
			660	200	TF200	501	3	3	O	
			660	250	TF250	490	3	3	O	
	B3	CENTRE TAG	660	250	TKF250	846	1	1	O	NO9
		SINGLE SLOT	660	315	TKF315	846	1	1	O	

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit
Type - SC (Safe Clip)

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
E1	-	Front	SS	20	SC20H	415	124	10	10	O
F1	-	Front	NS	32	SC32H	415	-	10	10	O
F2	-	Front	ES	63	SC63H	415	362	10	10	O

N - Normal; O - On Order

Fuse Fittings for LV BS Type of Fuses
Type NS & SM: Moulded Fuse Holder

IS / BS Size Reference	Tag Type	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
F1		Front	NS (upto 32A)	32	NSH32	415	124	10	10	O
		Back	NS (upto 32A)	32	NSP32	415	178	10	10	O
		Busbar	NS (upto 32A)	32	NSB32	415	154	10	10	O
A2	Offset Bolted	Front	TIA / TSA	32	SM32H	660	286	10	10	O
		Busbar	TIA / TSA	32	SM32B	660	340	10	10	O
A3	Offset Bolted	Front	TIA / TSS	63	SM63H	660	365	10	10	O
		Busbar	TIA / TSS	63	SM63B	660	393	10	10	O
A4	Offset Bolted	Front	TCP / TSD	125	SM125H	660	943	5	10	O
		Busbar	TCP / TSD	125	SM125B	660	948	5	10	O

N - Normal; O - On Order

Moulded Fuse Holder and Fuse Base for 415V AC Circuit
Type - SC (Safe Clip)

IS / BS Size Reference	Description	Connection Type	Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
00	-	-	NH00	160	ISG160	500	314	3	3	O
1	-	-	NH1	250	ISG250	660	660	3	3	O
2	-	-	NH2	630	ISG400	660	960	3	3	O
3	-	-	NH3	400	ISG630	660	1235	3	3	O

N - Normal; O - On Order

Pricelist - 2015

Type GSM ultra-fast acting multibody Fuselink for Diode & Thyristor Protection

800 \ 1000 Vac	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
	800	63	GSMJ63	704	3	3	O
800	120	GSMJ120	1631	1	1	O	
800	180	GSMJ180	2455	1	1	O	
800	240	GSMJ240	3194	1	1	O	
800	300	GSMJ300	3661	1	1	O	
800	350	GSMJ350	4811	1	1	O	
800	400	GSMJ400	5649	1	1	O	
800	460	GSMJ460	6206	1	1	O	
800	520	GSMJ520	6869	1	1	O	
800	580	GSMJ580	8229	1	1	O	
800	630	GSMJ630	9205	1	1	O	
800	680	GSMJ680	9624	1	1	O	
800	800	GSMJ800	13110	1	1	O	
800	1000	GSMJ1000	16392	1	1	O	
800	1200	GSMJ1200	18689	1	1	O	
1000	63	GSMK63	358	3	3	O	
1000	120	GSMK120	1715	1	1	O	
1000	180	GSMK180	2510	1	1	O	
1000	240	GSMK240	3591	1	1	O	
1000	300	GSMK300	4114	1	1	O	
1000	350	GSMK350	5090	1	1	O	
1000	400	GSMK400	6136	1	1	O	
1000	460	GSMK460	6834	1	1	O	
1000	520	GSMK520	8299	1	1	O	
1000	580	GSMK580	8926	1	1	O	
1000	630	GSMK630	9972	1	1	O	
1000	680	GSMK680	10949	1	1	O	
1000	800	GSMK800	13361	1	1	O	
1000	1000	GSMK1000	-	1	1	O	
1000	1200	GSMK1200	21199	1	1	O	
-	2000	SMK-GSM120-2000	340	1	1	O	
-	400	954GSMJ400	6496	1	1	O	
1000	500	RGS500	5099	1	1	O	

N - Normal; O - On Order

Semiconductor Fuse Accessories

Suitable for Fuse Type	Rating (Amps)	Cat. No. / Type	Rated Voltage (Volts)	Unit Price (₹)	Pack Qty.	MOQ	Delivery Class
LCT / LET / LMT	-	TI300-BI	-	372	20	20	O
CT / ET / FM	-	TI600-BI	-	390	20	20	N
GSMJ	-	TI1200-BI	-	402	20	20	O
GSMK	-	TI2000-BI	-	455	20	20	O

N - Normal; O - On Order

High Voltage Fuses

British Standard Type Range of Fuses for use in Motor Circuits

	Rated Voltage (Volts)	Rating (Amps)	XXXXTCat. No./ Type	Unit Price (₹)	Carton Qty.	MOQ	Delivery Class
3.6 / 7.2 KV ac	3.6	5	K3PGX5	4464	1	1	O
	3.6	10	K3PGX10	4464	1	1	O
	3.6	16	K3PGX16	4464	1	1	O
	3.6	20	K3PGX20	4464	1	1	O
	3.6	25	K3PGX25	4464	1	1	O
	3.6	32	K3PGX32	4464	1	1	O
	3.6	40	K3PGX40	4464	1	1	O
	3.6	50	K3PGX50	4464	1	1	O
	3.6	63	K3PGX63	4464	1	1	O
	3.6	80	K3PGX80	4464	1	1	O
	3.6	100	K81PEX100	7550	1	1	O
	3.6	160	K81PEX160	8470	1	1	O
	3.6	200	K81PEX200	9126	1	1	O
	3.6	250	K81PEX250	10470	1	1	O
	3.6	315	K81PEX315	12428	1	1	O
	3.6	350	K81PEX350	13966	1	1	O
	3.6	630	K82PFX630	44342	1	1	O
	7.2	50	K81SVX50	9454	1	1	O
	7.2	63	K81SVX63	9454	1	1	O
	7.2	80	K81SVX80	10307	1	1	O
	7.2	100	K81SVX100	10964	1	1	O
	7.2	125	K81SVX125	12539	1	1	O
	7.2	160	K81SVX160	12539	1	1	O
	7.2	200	K81SVX200	14378	1	1	O
	7.2	250	K81SVX250	17660	1	1	O
	7.2	400	K82SSX400	40311	1	1	O
	7.2	50	KSVX50	9815	1	1	O
	7.2	63	KSVX63	9815	1	1	O
	7.2	80	KSVX80	9815	1	1	O
	7.2	100	KSVX100	9815	1	1	O
	7.2	125	KSVX125	9815	1	1	O
	7.2	160	KSVX160	11010	1	1	O
	7.2	200	KSVX200	12320	1	1	O
	7.2	250	KSVX250	13963	1	1	O

N - Normal; O - On Order

Bussmann® by Eaton Products And Technical Expertise Delivered Worldwide

Customer Assistance

Customer Satisfaction Team

Bussmann by Eaton India Customer Satisfaction Team is available in Pondicherry to answer questions regarding Bussmann by Eaton products Sales, Supply and Services. Calls should be made between 9.00 am - 5.30pm IST.

- Phone : +91 413 267 2015/ 2018
- Fax : +91 413 267 8182
- E-mail : giridharans@eaton.com

Regional Contacts

Ahmedabad : +91 98793 55485	Chandigarh : + 91 95011 77119
Bangalore : +91 98451 75290	Kolkata : +91 94330 07468
Chennai : + 91 98403 26095	Mumbai : +91 98204 32943 +91 98330 14167
Coimbatore : + 91 93448 93165	Delhi : + 91 98110 86586
Hyderabad : +91 9533423461	Pune : +91 93265 06988

Regional E-mails

For E-mail, prefix cityname to bussmann____@eaton.com
Example, for Delhi, write - bussmandelhi@eaton.com

Application Engineering

Application Engineering and selection assistance is available to all customers. This team is staffed by subject matter expert, electrical application engineers and available Monday - Friday 9.00am - 5.30pm IST.

- E-mail : technicalhelpindia@eaton.com

Web services

www.cooperbussmann.com/1/technicalinformation.html

Cooper Bussmann website offers free information & resources that include:

- Products data sheets and complete technical information.
- Latest European & US Catalogues.
- Safety BaSICs™ for the essentials of electrical safety.
- Training modules for increasing skill levels of customers and end users.
- Cross referencing to find the correct Cooper Bussmann replacement for a competitor's fuse.

Your Authorised Bussmann by Eaton Distributor is :

Cross Reference Chart

LV BS FUSES

Clip on Type

BS Size	Bussmann	Bussmann
E1	SSD	SS
F1	NSD	NS
F2	ESD	ES

Bolted Type - 550V Range

BS Size	Bussmann	Bussmann*
A1	NITD	NIT
A2	AAO	TSA
A3	BAO*	TSS
A4	CEO	TSD
-	OSD	TSDS
C2	FF	TST
C3	GF	TLM
-	GG	TLT

*Fuses are 415V rated

Bolted Type - 660V Range

BS Size	Bussmann	Bussmann
A2	HO7-660	TIA
A3	KO7-660	TIS
A4	L14-660	TCP
-	M14-660	TFP
B1	LO9-660	TC
B2	MO9-660	TF
B3	NO9-660	TKF
B4	PO9-660	TMF
C1	P11-660	TM
C2	R11-660	TTM

Bolted Type - 415V Range

BS Size	Bussmann	Bussmann
-	EITD	EIT
-	DEO	TSFP
B1	CD	TSDC
B2	DD	TSF
B3	ED	TSF/TSK
B4	ED	TSK/TSM
-	SN11(S)	TSMS
-	SP11(S)	TSTS
-	SR11(S)	TSL
C1	EF	TSM
-	SR11	TSL

HIGHSPEED BS88 FUSES

Bussmann		Bussmann		Brand 4	
TYPE	RANGE	TYPE	RANGE	TYPE	RANGE
240 Volts Range					
LCT	6- 20	GSA	5 - 20	2.5URE	6 - 20
LET	25-180	GSA	25 - 100	2.5URGS/URZ	25 - 100
LMT	160-450	GS450	150 - 250	2.5URGG	150 - 250
LMT	160-450	GS450	300 - 500	2.5URGH	300 - 500
LMMT	400-900	--	--	--	--
690 Volts Range					
CT	6- 20	GSB	5 - 20	6.6URE	6 - 20
ET	25-80	GSB	25 - 75	6.6URS	25 - 75
ET	25-80	GSG1000	16 - 55	6.6URS	16 - 55
EET	90-160	GSG1000	75 - 150	6.6URT	75 - 140
FM	180-350	GS1000	100 - 200	6.6URGL/UR	100 - 250
MT	160-355	GS1000	100 - 200	6.6URGL/UR	100 - 250
MMT	180-710	GS1000	300 - 500	--	--
MMT	180-710	GSG1000	175 - 350	6.6 URGM/URU	175 - 350

HV FUSES

Appl. used in	Bussmann	Bussmann	Appl. used in	Bussmann	Bussmann
Air	ADGHC	H2CAS	VT/PT	ABCNS	5xVTF
Air	ADOH6 / ADOH7	K3PGX	Motor Ckt.	WDOHS	K3PGX
Air	BFGHD	H2CAS	Motor Ckt.	WDFMO/ WFFMO	K81PEX/ K81PRX
Air	BDGHC	H2CAS	Motor Ckt.	WKFMO	K82PEX
Air	AHGHC	H2CAS	Motor Ckt.	WFQMO	K81SVX / K81SRX
Oil	OHGMA/OLGMA	KEMXO	Motor Ckt.	WKQMO	K82SSX
Oil	OEFMA/OHFMA	KEBXO			
VT/PT	ABWNA	VTF			
VT/PT	ABCNA	VTF			

LV NH DIN FUSES

Size as per IEC	Bussmann	Bussmann	Brand 2	Brand 3
400 / 415 Volts				
SIZE C00/000	NHG000B-400	NA	NA	
SIZE 00	NHG00B-400	NA	NA	HNSIZE00
SIZE 1	NHG01-400 / NHG1-400	NA	NA	HN SIZE1
SIZE 2	NHG02-400 / NHG2-400	NA	NA	HN SIZE2
SIZE 3	NHG03-400 / NHG3-400	NA	NA	HN SIZE3
500 Volts				
SIZE C00/000	NHG000B	VSA	3NA38	NA
SIZE 00	NHG00B	VSB	3NA10	NA
SIZE 1	NHG01 / NHG1	VSF	3NA12	NA
SIZE 2	NHG02 / NHG2	VSK	3NA13	NA
SIZE 3	NHG03 / NHG3	VST	3NA14	NA
660 / 690 Volts				
SIZE 00	NH00G - 690	NA	NA	NA
SIZE 1	NH1G-690	NA	NA	NA
SIZE 2	NH2G- 690	NA	NA	NA
SIZE 3	NH3G- 690	NA	NA	NA

LV NH DIN Bases

Suitable for Size	Bussmann		Bussmann	Brand 2	Brand 3
	Type	Amps			
C00/000/00	SB 00 - PB	160	ISG160	3NH3030 / 3032	HB 125
01/1	SB 1 - D	250	ISG250	3NH3230	HB 250
02/2	SB 2 - D	400	ISG400	3NH3330	HB 800

LV BS88 Bases

BS Size	Bussmann			Bussmann	Brand 2	Brand 3
	Fuse Types	Type	Amps			
Old Type						
F1	NSD / FO6	FA	32	NSH	NA	HD32H
F1	NSD / FO6	FB	32	NSP	NA	HD32P
F1	NSD / FO6	FD	32	NSB	NA	HD32B
A2	HO7 / AAO / FO7	HA	32	SM32H	NA	HK32H
A2	HO7 / AAO / FO7	HD	32	SM32B	NA	HK32B
A3	TO7 / BAO / KO7	KA	63	SM63H	NA	HK63H
A3	TO7 / BAO / KO7	KD	63	SM63B	NA	HK63B
A4	L14 / CEO / DEO@ / M14@ / KL14	LA	125	SM125H	NA	HK125H
A4	L14 / CEO / DEO@ / M14@ / KL14	LD	125	SM125B	NA	HK125B
New Safeloc Type						
F1	NSD / FO6	NNSF	32	SC32H	3NW 32	NA
					NNSF	
F2	ESD	ENSF	63	SC63H	NA	NA
New Range - Cam Master						
A2	HO7 / AAO / FO7	CM32F	32		3NW CM32F9	NA
A3	TO7 / BAO / KO7	CM63F	63		3NW CM63F9	NA
	OSD	CM100F	100		3NW CM100F9	NA

@ - upto 125A only

- ❖ The chart is intended for guidance purpose only, considering physical replacability
- ❖ In identical operating condition, Bussmann fuse can be used to achieve similar performance.
- ❖ Other makes may not necessarily have identical performance. Relevant data like rated voltage, breaking capacity, let thru' current, etc also need to be evaluated while evaluating fuse performance.