

Life Is On

Schneider
Electric



 Price List

Industrial Automation Products

With effect from July 15th, 2025



se.com/in

Phaseo Power Supplies	5
■ Phaseo Power Supplies	5
Harmony Smart Relays	6
■ Harmony Smart Relays	6
Altivar AC Drives	8
■ Altivar ATV12	11
■ Altivar ATV310	11
■ Altivar ATV610	14
■ Altivar ATV212	14
■ Altivar ATV320	15
■ Altivar ATV320 Solar	17
■ Altivar ATV340	20
■ Altivar ATV630	23
■ Altivar ATV930	24
■ Altivar Process Modular	26
Altivar Soft Starter	33
■ ATS01	33
■ ATS130	33
■ ATS22	33
■ ATS430	35
■ ATS480	39
■ ATS490	41
Harmony Relays	42
■ Harmony Plug - In Relays	43
■ Harmony Electronic Timers/Control Relays	47
■ Easy Harmony Electronic Relays	50
Control & Signaling Components	51
■ Easy Harmony XA2 Plastic Pilot Lights	52
■ Harmony XB5/XB7 Plastic (Pushbutton, Switches)	53
■ Easy Harmony XB2 Metal (Pushbutton, Switches)	58
■ Harmony Control Station & Enclosures	59
■ Harmony XVB7 Modular Tower Light 70 mm	62
■ Signaling Illuminated beacons	63
■ Easy Harmony XVG Monolithic Tower Light 60 mm	66
■ Pendant Control Station	68
■ Harmony Control Station XAPD Metal	74
Harmony Panels and Industrial PCs	75
■ Harmony Basic HMI Panels for Simple Machines	77
■ Harmony Advanced HMI Panels for Performance Machines	80
■ Harmony HMI Software and Services	84
TeSys Range	90
■ TeSys K Control Relays	91
■ TeSys K Power Contactors	91
■ TeSys K Accessories	92
■ TeSys Capacitor Duty Contactor	93
■ TeSys Deca Control Relays	94
■ TeSys Deca Power Contactors (3 Pole)	94
■ TeSys Deca Power Contactors (4 Pole)	95
■ TeSys Deca Advanced Contactor (3 Pole)	99
■ TeSys Deca Advanced Contactor (4 Pole)	99
■ TeSys Deca Accessories	101
TeSys Giga - Future Ready	107
■ TeSys Giga Power Contactors	109
■ TeSys Giga Accessories	110

Protection Relays for Motor Safety	113
TeSys Protect	114
■ TeSys K, TeSys Deca, TeSys F, TeSys Giga	114
■ EOCR	116
■ Analog EOCR	117
■ EOCR SS	117
■ EOCR SSD	117
TeSys Power	118
■ Circuit Breakers for Motor Protection	119
■ Accessories compatibility	121
■ TeSys Switches	123
■ Accessories for Switches	124
TeSys Island	125
■ Ultra motor starters	127
ComPact NSX	128
■ EasyPact CVS	129
■ Accessories	130
Acti 9	131
■ Miniature Circuit Breakers (MCBs)	131
■ Residual Current Devices	135
■ Auxiliaries and Accessories for MCBs / RCDs	137
■ Surge Protection Devices	139
■ Control and Command Products	141

Panel Mount EasySeries



- Wide power range (7 models from 35 to 350 W)
- High degree of output voltage stability (precision: $\pm 1\%$)
- Proven performance (MTBF over 600K hours)
- Diagnostics via LEDs at the output terminal
- 4 quick and simple mounting types

Input Voltage	Output Voltage	Output Current	Reference	Description	Unit MRP [₹]
100...240 V AC single phase	24V	1.5A	ABL2REM24015K	ABL2_K Power Supply, DC24V output, 35W	2888
100...240 V AC single phase	24V	2A	ABL2REM24020K	ABL2_K Power Supply, DC24V output, 50W	3201
100...240 V AC single phase	24V	4.5A	ABL2REM24045K	ABL2_K Power Supply, DC24V output, 100W	4740
100...240 V AC single phase	24V	6.5A	ABL2REM24065K	ABL2_K Power Supply, DC24V output, 150W	5718
100...240 V AC single phase	24V	8.5A	ABL2REM24085K	ABL2_K Power Supply, DC24V output, 200W	7583
100...240 V AC single phase	24V	10A	ABL2REM24100K	ABL2_K Power Supply, DC24V output, 250W	8674
100...240 V AC single phase	24V	15A	ABL2REM24150K	ABL2_K Power Supply, DC24V output, 350W	14143

Universal ABL8RP/WP



- 100-500 Vac (1 or 2 Phases) Or 380-500Vac 3 Phases Input terminals
- Automatic or Manual reset
- 2 diagnosis LED (U/I)
- 4 to 10 mm² output terminals
- Tool-free removal from omega (DIN) rail
- Protection of settings (sealable)
- Diagnosis relay

Input Voltage	Output Voltage	Output Current	Reference	Description	Unit MRP [₹]
100...120 V AC single phase, terminal(s): N-L1 200...500 V AC phase to phase, terminal(s): L1-L2	24V	3A	ABL8RPS24030	Univ. Power Supply 1P 24V 3A, 72W	19130
100...120 V AC single phase, terminal(s): N-L1 200...500 V AC phase to phase, terminal(s): L1-L2	24V	5A	ABL8RPS24050	Univ. Power Supply 1P 24V 5A, 120W	24731
100...120 V AC single phase, terminal(s): N-L1 200...500 V AC phase to phase, terminal(s): L1-L2	24V	10A	ABL8RPS24100	Univ. Power Supply 1P 24V 10A, 240W	28253
100...120 V AC single phase, terminal(s): N-L1 200...240 V AC phase to phase, terminal(s): L1-L2	24V	20A	ABL8RPM24200	Univ. Power Supply 1P 24V 10A, 480W	42525
380...500 V AC three phase, terminal(s): L1, L2, L3	24V	20A	ABL8WPS24200	Univ. Power Supply 3P 24V 20A, 480W	42257
380...500 V AC three phase, terminal(s): L1, L2, L3	24V	40A	ABL8WPS24400	Univ. Power Supply 3P 24V 40A, 960W	73702

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Zelio 2 compact smart relay
with displayZelio 2 compact smart relay
without displayZelio 2 modular smart relay
with display

Relays

Description	Reference	Unit MRP [₹]
Voltage 24V DC		
Zelio Logic module - 10 I O, RLY - w/o clock - with display	SR2A101BD ☒	19094
Zelio Logic module - 20 I O, RLY - w/o clock - with display	SR2A201BD ☒	31169
Zelio Logic module - 12 I O, TRN - with clock - with display	SR2B121BD ☒	17462
Zelio Logic module - 12 I O, TRN - with clock - with display	SR2B122BD	26192
Zelio Logic module - 20 I O, RLY - with clock - with display	SR2B201BD ☒	34677
Zelio Logic module - 20 I O, RLY - with clock - with display	SR2B202BD	36065
Zelio Logic module - 10 I O, RLY - w/o clock - w/o display	SR2D101BD ☒	13944
Zelio Logic module - 20 I O, RLY - w/o clock - w/o display	SR2D201BD ☒	27987
Zelio Logic module - 12 I O, RLY - with clock - w/o display	SR2E121BD	17950
Zelio Logic module - 20 I O, RLY - with clock - w/o display	SR2E201BD	32507
Zelio Logic module - 10 I O, RLY - with clock - with display	SR3B101BD	21052
Zelio Logic module - 10 I O, TRN - with clock - with display	SR3B102BD	19420
Zelio Logic module - 26 I O, RLY - with clock - with display	SR3B261BD ☒	43732
Zelio Logic module - 26 I O, TRN - with clock - with display	SR3B262BD	43815
Voltage 100-240V AC		
Zelio Logic module - 10 I O, RLY - w/o clock - with display	SR2A101FU ☒	21622
Zelio Logic module - 20 I O, RLY - w/o clock - with display	SR2A201FU ☒	32066
Zelio Logic module - 12 I O, RLY - with clock - with display	SR2B121FU ☒	21459
Zelio Logic module - 20 I O, RLY - with clock - with display	SR2B201FU ☒	35658
Zelio Logic module - 10 I O, RLY - w/o clock - w/o display	SR2D101FU	14926
Zelio Logic module - 20 I O, RLY - w/o clock - w/o display	SR2D201FU	31648
Zelio Logic module - 12 I O, RLY - with clock - w/o display	SR2E121FU	18911
Zelio Logic module - 20 I O, RLY - with clock - w/o display	SR2E201FU	37457
Zelio Logic module - 10 I O, RLY - with clock - with display	SR3B101FU	22661
Zelio Logic module - 26 I O, RLY - with clock - with display	SR3B261FU ☒	45201
Voltage 12V DC		
Zelio Logic module - 12 I O - with clock - with display	SR2B121JD	22440
Zelio Logic module - 20 I O - with clock - with display	SR2B201JD	27347
Voltage 24V AC		
Zelio Logic module - 12 I O - with clock - with display	SR2B121B	22440
Zelio Logic module - 20 I O - with clock - with display	SR2B201B	41103
Zelio Logic module - 20 I O - with clock - w/o display	SR2E201B	32665
Zelio Logic module - 10 I O - with clock - with display	SR3B101B	24038
Zelio Logic module - 24 I O - with clock - with display	SR3B261B	47731

Note: Zelio Smart Relays are also available in other voltages. Please contact our nearest Sales Office for the same.



I/O Extension module

I/O Extension modules

Description	Reference	Unit MRP [₹]
Discrete I/O extension module - 6 I O 4DI, 2DO - 24 V DC	SR3XT61BD	8599
Discrete I/O extension module - 6 I O 4DI, 2DO	SR3XT61FU	8481
Discrete I/O extension module - 10 I O 6DI, 4DO - 24 V DC	SR3XT101BD ☒	9246
Discrete I/O extension module - 10 I O 6DI, 4DO	SR3XT101FU	11205
Discrete I/O extension module - 14 I O 8DI, 6DO - 24 V AC	SR3XT141B	18637
Discrete I/O extension module - 14 I O 8DI, 6DO - 24 V DC	SR3XT141BD ☒	12753
Discrete I/O extension module - 14 I O 8DI, 6DO	SR3XT141FU	13552
Analogue I/O extension module - 2 AI/ 2AO	SR3XT43BD	20428

Accessories

Description	Reference	Unit MRP [₹]
SUB-D 9-pin PC connecting cable - 3 m	SR2CBL01 ☒	14046
Communication interface	SR2COM01	24492
memory cartridge firmware - for v 3.0 - EEPROM	SR2MEM02 ☒	3439
USB PC connecting cable - 3 m	SR2USB01 ☒	17475

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Altivar™ AC Drives

Advanced energy management
and performance in motor control

Variable Speed Drives

Process



**Mining,
Minerals &
Metals**



Marine



**Food &
Beverage**



**Water &
Wastewater**



Oil & Gas



**Power
Plants**

Fluid Management

Altivar Process 600



Wall Mounting
0.75...315 kW
200...690 V



Cabinet Integration
0.75...2600 kW
380...690 V

Industrial Processes

Altivar Process 900



Wall Mounting
0.75...315 kW
200...690 V



Cabinet Integration
0.75...2600 kW
380...690 V

Machines



Hoisting



**Material
Handling**



Textile



**Material
Working**



Packaging

Commercial Equipment

Altivar 12



0.18...4 kW
100...240 V

Basic Machines

Altivar 310



IP20
0.75 to 22 kW
380...460 V

Simple & Advanced Machines

Altivar 320B/C



Book/compact format
0.18...22 kW
200...600 V
*Range extension
for compact

Altivar340



Book/compact
format
0.75...75 kW
380...480 V

Altivar 320W



Harsh environment
IP65/66
0.18...7.5 kW
380...480 V

Altivar 320 solar



0.37...15 kW
200...500 V

Building



Pumps



Lift



**Fans &
Compressors**

HVAC & Pumps

Altivar 212



IP21
0.75...75 kW
200...480 V



IP55
0.75...75 kW
380...480 V

Utilities

Altivar 610



0.75...315 kW
380...460 V
*Range extension

Soft Starters

Simple Machines

Altistart 01



3...85 A
110...480 V

Altivar Soft Starter ATS130



38...105 A
200...480 V

Newly
Launched

Industrial Processes & Utility

Altistart 22



17...590 A
208...600 V

Altivar Soft Starter ATS430



17-590A
208-600V

Newly
Launched

Altivar Soft Starter ATS480



208 to 690V
17 to 1700A

Altivar Soft Starter ATS490



17-1200A
208-690V

Newly
Launched

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Altivar™ Easy 310 Drives for Simple Machines Now available upto 22kW

Reliable & cost effective solution to manage the speed of your motors in your machines.

se.com/drives



*When just enough
is just right!*



General Purpose Drives

Altivar™ 12: Drives for 1-Phase / 3-Phase 230 Volts Input & 3-Phase 230 Volts Output



- Small: easily integrated in any machine
- Discreet & Intuitive
- Reliable: quality which stands the test of time
- High-performance: even without adjustment

kW (HD)	HP Rating	Max. continuous current(A)	Reference	Unit MRP [₹]
Single phase-Supply Voltage: 200...240V				
0.18	0.25	1.4	ATV12H018M2	On Request
0.37	0.55	2.4	ATV12H037M2	On Request
0.55	0.75	3.5	ATV12H055M2	On Request
0.75	1	4.2	ATV12H075M2	On Request
1.5	2	7.5	ATV12HU15M2	On Request
2.2	3	10	ATV12HU22M2	On Request
Three phase-Supply Voltage: 200...240V				
0.37	0.55	2.4	ATV12H037M3	On Request
0.75	1	4.2	ATV12H075M3	On Request
1.5	2	7.5	ATV12HU15M3	On Request
2.2	3	10	ATV12HU22M3	On Request
3	~	12.2	ATV12HU30M3	On Request
4	5	16.7	ATV12HU40M3	On Request

Altivar™ 310: Drives for 3-Phase 440 Volts Input & 3-Phase 440 Volts Output



- Optimized installation space & Optimized time and cost
- Service cost savings
- Easy to operate
- Easy to maintain & Easy to integrate in automation system
- 55deg Celsius ambient temperature without derating

ND	KW		Max. Continuous Current (A)		Reference	Unit MRP [₹]
	HD	ND	HD	ND		
~	0.37	~	1.5	~	ATV310H037N4E	On Request
~	0.75	~	2.3	~	ATV310H075N4E	On Request
~	1.5	~	4.1	~	ATV310HU15N4E	On Request
~	2.2	~	5.5	~	ATV310HU22N4E	On Request
4	3	8.9	7.1	~	ATV310HU30N4E	On Request
5.5	4	12.1	9.5	~	ATV310HU40N4E	On Request
7.5	5.5	16	12.6	~	ATV310HU55N4E	On Request
11	7.5	22.8	17	~	ATV310HU75N4E	On Request
15	11	30	24	~	ATV310HD11N4E	On Request
18	15	36	33	~	ATV310HD15N4E	On Request
22	18	43	39	~	ATV310HD18N4E	On Request
30	22	60	46	~	ATV310HD22N4E	On Request
18	15	36	33	~	ATV310HD15N4EF	On Request
22	18	43	39	~	ATV310HD18N4EF	On Request
30	22	60	46	~	ATV310HD22N4EF	On Request

*F refer to inbuilt EMC

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Automation and control made easy

Easy Altivar™ 610 variable speed drives.

Easy Altivar™ 610 variable speed drives for three-phase synchronous motors address the challenges faced by new economies. They are fit for purpose at affordable prices with no compromise on ease of use, robustness, and availability – the core values supported by a worldwide leader in automation.



Water & wastewater



Oil & gas



Constant, negative pressure water supply



Building



Power



Other OEM



Fit for purpose

- Optimized control system
- Multi-pump control function
- Harmonic mitigation solution

Designed for easiness

- Easy to install
- Easy to set up and use
- Easy to maintain

Strong on robustness

- Robust design for harsh environments
- Ever higher protection and performance

Always available

- Wide availability
- Worldwide technical assistance

**MADE
IN INDIA**

Contact with Schneider Electric sales for country of origin.

se.com/easyaltivar610

Easy Altivar™ 610

Now available upto 460V

Main features

Power range:

0.75 to 315kW

Main voltage range:

380~460V, 3 phase, -15 to +10%

Overload capability:

ND: 110% 60s; 120% 20s;

HD: 150% 60s

EMC:

C3 level filter embedded

Harmonics:

DC choke embedded (above 4kW)

Protection:

IP20

Operation temperature:

-15°C to +60°C (derating above +45°C)

Motor control law:

Asy motor: V/f 2 pts; V/f 5 pts;

UF quad; energy saving

Control I/O

Control terminal:

- Analog input: 3
- Analog output: 2
- Digital input: 6
- Relay output: 3

Communication:

- Modbus embedded;
- option: Profibus DP



Display terminal

Basic keypad (standard)

- LCD backlight, removable
- 2 lines, 6 languages
- Configuration save
- Easy mounting kit (Ø22mm)



For more information and product references visit

se.com/easyaltivar610

Altivar™ 610: Drives for pumps and fans from 0.75 to 315 kW

Now available upto 460V



- Compact size: simplicity of integration and reduction of the size of the enclosures
- Electronic cards with protective coating
- Operation temperature: -10...+60°C
- IP40 protection level on the top of the product
- Typical multi-pump configuration without PLC
- 7 preprogrammed function blocks cover 90% of the pump and fan applications
- Colored control circuit terminals to avoid misuse

kW		Max. continuous current(A)		Reference	Unit MRP [₹]
ND	HD	ND	HD		
Three phase-Supply Voltage: 380...460V					
4	3	9.3	7.2	ATV610U40N4	On Request
5.5	4	12.7	9.3	ATV610U55N4	On Request
7.5	5.5	15.8	12.7	ATV610U75N4	On Request
11	7.5	23.5	16.5	ATV610D11N4	On Request
15	11	31.7	23.5	ATV610D15N4	On Request
18.5	15	39.2	31.7	ATV610D18N4	On Request
22	18.5	46.3	39.2	ATV610D22N4	On Request
30	22	61.5	46.3	ATV610D30N4	On Request
37	30	74.5	59.6	ATV610D37N4	On Request
45	37	88	74.5	ATV610D45N4	On Request
55	45	106	88	ATV610D55N4	On Request
75	55	145	106	ATV610D75N4	On Request
90	75	173	145	ATV610D90N4	On Request
110	90	211	173	ATV610C11N4	On Request
132	110	250	211	ATV610C13N4	On Request
160	132	302	250	ATV610C16N4	On Request
220 	160	~	~	ATV610C22N4*	On Request
250 	220	~	~	ATV610C25N4*	On Request
315 	250	~	~	ATV610C31N4*	On Request

Note: *Range Extension

Altivar™ 212: Drives for HVAC, 3-phase Asynchronous Motors

from 0.75 to 75 kW



- Embedded communication Modbus, Apogee FLN P1, Metasys N2, BacNet
- More Friendly simplicity & comfort with Universal Graphic Keypad
- Low Harmonics Emissions: Low THDI = 30%
- EMC Immunity Protection & Noise reductions
- AHRI Approved
- N4Z without display, VW3A1111 advance display to be ordered seperately

kW	Max. continuous current(A)	Reference	Unit MRP [₹]
Three phase-Supply Voltage: 380...480V			
0.75	2.2	ATV212H075N4	On Request
1.5	3.7	ATV212HU15N4	On Request
2.2	5.1	ATV212HU22N4	On Request
3	7.2	ATV212HU30N4	On Request
4	9.1	ATV212HU40N4	On Request
5.5	12	ATV212HU55N4	On Request
7.5	16	ATV212HU75N4	On Request
11	22.5	ATV212HD11N4	On Request
15	30.5	ATV212HD15N4	On Request
18.5	37	ATV212HD18N4	On Request
22	43.5	ATV212HD22N4	On Request
30	58.5	ATV212HD30N4	On Request
37	79	ATV212HD37N4	On Request
45	94	ATV212HD45N4	On Request
55	116	ATV212HD55N4	On Request
75	160	ATV212HD75N4	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.


☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Machine Drives

Altivar™ 320: Drives for Synchronous and Asynchronous Motors from 0.18 to 22 kW (0.25 to 30 Hp)

Altivar™ 320 Power extension



Product selector
for ATV320



EcoStruxure™ Motor
Control Configurator



EcoStruxure™ Motor
Management Design

- Cost Saving: Optimized Space and Time
- Solution Oriented: ATV Logic, Ready for automation integration
- Ambient temperature: 50deg C w/o deration
- Safety embedded as standard (STO SIL3)
- Possibility to connect a graphic terminal as option (Basic & Advanced)
- Modbus & Can Open as standard
- Protection against harsh environment 3C3 class

kW	Max. continuous current(A)	Reference	Unit MRP [₹]
Single phase-Supply Voltage: 200...240V			
0.18	1.5	ATV320U02M2C	On Request
0.37	3.3	ATV320U04M2C	On Request
0.55	3.7	ATV320U06M2C	On Request
0.75	4.8	ATV320U07M2C	On Request
1.1	6.9	ATV320U11M2C	On Request
1.5	8	ATV320U15M2C	On Request
2.2	11	ATV320U22M2C	On Request
Three phase-Supply Voltage: 200...240V			
1.5	8	ATV320U15M3C	On Request
4	17.5	ATV320U40M3C	On Request
5.5	27.5	ATV320U55M3C	On Request
7.5	33	ATV320U75M3C	On Request
11	54	ATV320D11M3C	On Request
15	66	ATV320D15M3C	On Request
Three phase-Supply Voltage: 380...500V (COMPACT)			
0.37	1.5	ATV320U04N4C	On Request
0.55	1.9	ATV320U06N4C	On Request
0.75	2.3	ATV320U07N4C	On Request
1.1	3	ATV320U11N4C	On Request
1.5	4.1	ATV320U15N4C	On Request
2.2	5.5	ATV320U22N4C	On Request
3	7.1	ATV320U30N4C	On Request
4	9.5	ATV320U40N4C	On Request
5.5	14.3	ATV320U55N4C	On Request
7.5	17	ATV320U75N4C	On Request
11	27.7	ATV320D11N4C	On Request
15	33	ATV320D15N4C	On Request
18.5 NEW	~	ATV320D18N4C**	On Request
22 NEW	~	ATV320D22N4C**	On Request
Three phase-Supply Voltage: 380...500V (BOOK)			
0.4	1.5	ATV320U04N4B	On Request
0.6	1.9	ATV320U06N4B	On Request
0.8	2.3	ATV320U07N4B	On Request
1.1	3	ATV320U11N4B	On Request
1.5	4.1	ATV320U15N4B	On Request
2.2	5.5	ATV320U22N4B	On Request
3	7.1	ATV320U30N4B	On Request
4	9.5	ATV320U40N4B	On Request
5.5	14.3	ATV320U55N4B	On Request
7.5	17	ATV320U75N4B	On Request
11	27.7	ATV320D11N4B	On Request
15	33	ATV320D15N4B	On Request
Three phase-Supply Voltage: 380...500V, IP66			
0.37	1.5	ATV320U04N4W*	On Request
0.55	1.9	ATV320U06N4W*	On Request
0.75	2.3	ATV320U07N4W*	On Request
1.1	3	ATV320U11N4W*	On Request
1.5	4.1	ATV320U15N4W*	On Request
2.2	5.5	ATV320U22N4W*	On Request
3	7.1	ATV320U30N4W*	On Request
4	9.5	ATV320U40N4W*	On Request
5.5	14.3	ATV320U55N4W*	On Request
7.5	17	ATV320U75N4W*	On Request

Note: **Range Extension

References ending with B are BOOK type & Reference ending with C are COMPACT type.

References ending with N4W* are IP66.

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar ATV320 Solar Drive

0.37 to 15 kW (0.5 to 20 HP)

Unique features

Altivar Solar variable speed drive for pump is compatible with a wide range of pumps and solar arrays which helps reducing the number of components, increasing the reliability and service life of the installation and adjusting the pump flow to the availability of the energy.

The Altivar Solar ATV320 drive is a robust, simple to commission, and easy to integrate for pumping applications. The drive embeds solar specific functions to address advance application requirements and improve pump performance. These functions ensure more pump availability while reducing the total system cost.



Applications



Irrigation
of land



Domestic
water supply



Fish farming



Livestock



Swimming pool



Fountain

Altivar Machine ATV320 Solar Machine Drives



- Maximize production efficiency
- Reduce OPEX
- Easy scalability of automation system
- Future-ready solution for Industry 4.0
- Improve system power quality with a low investment
- Improve the functional safety, integration, and performance of applications
- Optimize maintenance costs and drive service life has context menu

The Altivar ATV320 Solar is a variable speed drive for three-phase asynchronous and synchronous motors from 0.37 kW/0.5 HP to 15 kW/20 HP.

kW	Motor HP	Max Continuous output current A	Reference	Unit MRP [₹]
Single-phase supply voltage (AC): 200...240 V 50/60 Hz, with integrated EMC filter (2) (3), DC Input Voltage : 150-374 VDC.(VOC=374 VDC max)				
0.37	0.5	3.3	ATV320U04M2C412	On Request
0.55	0.75	3.7	ATV320U06M2C412	On Request
0.75	1	4.8	ATV320U07M2C412	On Request
1.1	1.5	6.9	ATV320U11M2C412	On Request
1.5	2	8	ATV320U15M2C412	On Request
2.2	3	11	ATV320U22M2C412	On Request
Three-phase supply voltage (AC): 200...240 V 50/60 Hz, without integrated EMC filter, DC Input Voltage : 150-374 VDC.(VOC=374 VDC max)				
3	4	13.7	ATV320U30M3C412	On Request
4	5	17.5	ATV320U40M3C412	On Request
5.5	7.5	27.5	ATV320U55M3C412	On Request
7.5	10	33	ATV320U75M3C412	On Request
11	15	54	ATV320D11M3C412	On Request
15	20	66	ATV320D15M3C412	On Request
Three-phase supply voltage (AC): 380...500 V 50/60 Hz, with integrated EMC filter (2) (3), DC Input Voltage : 280-778 VDC.(VOC=778 VDC max)				
0.37	0.5	1.5	ATV320U04N4C412	On Request
0.55	0.75	1.9	ATV320U06N4C412	On Request
0.75	1	2.3	ATV320U07N4C412	On Request
1.1	1.5	3	ATV320U11N4C412	On Request
1.5	2	4.1	ATV320U15N4C412	On Request
2.2	3	5.5	ATV320U22N4C412	On Request
3	4	7.1	ATV320U30N4C412	On Request
4	5	9.5	ATV320U40N4C412	On Request
5.5	7.5	14.3	ATV320U55N4C412	On Request
7.5	10	17	ATV320U75N4C412	On Request
11	15	27.7	ATV320D11N4C412	On Request
15	20	33	ATV320D15N4C412	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Altivar™ The next SMART manufacturing era

Altivar™ Machine ATV340, innovative
variable speed drives for high-performance machines

The Altivar™ Machine ATV340* drive is robust for high overloads, offering safety, various communication protocols, and cutting-edge motor control solution for machine builders.

Traditional machine design is challenged by the smart manufacturing approach. Changing times require innovative features such as the native Ethernet based - Fast Device Replacement. It gives machine operators a seamless service approach. The embedded encoder is compatible with asynchronous and synchronous motors in closed-loop control applications and the load-sharing master/slave configuration makes ATV340 a SMART manufacturing success.

* From 1 HP to 100 HP in heavy duty with 3-phase supply voltage from 380 to 480 V.



High performance in material handling, material working and hoisting

The ATV340 improves the capabilities and availability of high-performance machines while reducing build costs thanks to:

- **Superior machine performance.** With a maximum torque availability of 1.8 In and optimized speed bandwidth of up to 400 Hz, the ATV 340 is ideal for dynamic applications with rapid acceleration. Its frequency inverters can handle high overloads in demanding applications up to 220% nominal torque.
- **Faster reaction time.** A combination of fast application reaction time with a minimum 1 ms task cycle and Ethernet connectivity maximizes your machine throughput.
- **Simplified machine engineering.** Built-in multiprotocol (Ethernet, Modbus, SERCOS) a variety of interfaces, an embedded encoder and integrated application functions offer maximum flexibility in design. Remote monitoring via the embedded web server enables predictive maintenance. EcoStruxure™ Machine & FDR allow faulty device replacement service with short time machine recovery.
- **Reduced design time.** Complete project replication is possible with one-button auto-tuning for motor identification and supports efficient machine commissioning and production. Additionally, ready-to-use Tested, Validated, and Documented Architectures (TDVAs) and SoMachine software facilitate seamless automation integration.
- **Comprehensive functional safety and cyber security.** With embedded STO (SIL3) and a full range of safety functions (SS1, SLS, SMS, SBC, GDL), the ATV340 is compliant with machine related safety standards EN ISO 13849-1 and EN 62061. The ATV340 also has Achilles level 2 cyber-security certification to protect people and assets while ensuring continuity of service.
- **Robust.** In harsh environments with high levels of dust and vibration and operating temperatures up to 60°C. Due to high IGBT and thermal dissipation efficiency, it allows additional 40% of rated current taking motor power to 130kW under normal duty operation.

220%
Nominal torque

1 ms
Application cycle time



Modular and Ethernet version
with different application approach



Optional Safety card offers for high-end safety functions

Safe Stop 1 (SS1)
Safe Limited Speed (SLS)
Safe Maximum Speed (SMS)
Safe Brake Control (SBC)
Guard Door Lock (GDL)



High power Safety solution
(up to 75kW), Safety card and additional module support

For more information and product references visit

se.com/drives

Altivar™ 340: Drives with innovative variable speed drives for high-performance machines upto 75kW



- Reduced requirement for additional devices thanks to rich interfaces, I/Os, and PTIs/PTOs, and an embedded encoder
- 5 DI +2 (DI/DO); 2 RO ;2 AI ;1 AO
- 30kW...75kW : 8 DI ;1DO ;3RO ;3AI ;2AO
- DC choke inbuilt from 30kW and above
- Heavy duty 150%In for 60sec & 180%In for 2sec
- Embedded STO SIL3
- On board A/B/I & SinCos 1Vpp encoder
- Chemical class for harsh environment 3C3
- High-speed native multi-Ethernet connectivity – real-time communication
- 1 ms application cycle time

ATV340 Modular Drive: Power & Supply Voltage: 0.75 – 22 kW & 400/480 V three phase

ATV340 Ethernet Drive(ATV340***N4E): Power & Supply Voltage: 0.75 – 75 kW & 400/480 V three phase

kW		Max. continuous current (A)		Reference	Unit MRP [₹]
ND	HD	ND	HD		
Three phase-Supply Voltage: 380...480V (Modular)					
1.1	0.75	2.8	2.2	ATV340U07N4	On Request
2.2	1.5	5.6	4	ATV340U15N4	On Request
3	2.2	7.2	5.6	ATV340U22N4	On Request
4	3	9.3	7.2	ATV340U30N4	On Request
5.5	4	12.7	9.3	ATV340U40N4	On Request
7.5	5.5	16.5	12.7	ATV340U55N4	On Request
11	7.5	24	16.5	ATV340U75N4	On Request
15	11	32	24	ATV340D11N4	On Request
18.5	15	39	32	ATV340D15N4	On Request
22	18.5	46	39	ATV340D18N4	On Request
30	22	62	46	ATV340D22N4	On Request
Three phase-Supply Voltage: 380...480V (With Ethernet)					
1.1	0.75	2.8	2.2	ATV340U07N4E	On Request
2.2	1.5	5.6	4	ATV340U15N4E	On Request
3	2.2	7.2	5.6	ATV340U22N4E	On Request
4	3	9.3	7.2	ATV340U30N4E	On Request
5.5	4	12.7	9.3	ATV340U40N4E	On Request
8	5.5	16.5	12.7	ATV340U55N4E	On Request
11	8	24	16.5	ATV340U75N4E	On Request
15	11	32	24	ATV340D11N4E	On Request
18.5	15	39	32	ATV340D15N4E	On Request
22	18.5	46	39	ATV340D18N4E	On Request
30	22	62	46	ATV340D22N4E	On Request
37	30	74.5	61.5	ATV340D30N4E	On Request
45	37	88	74.5	ATV340D37N4E	On Request
55	45	106	88	ATV340D45N4E	On Request
75	55	145	106	ATV340D55N4E	On Request
90	75	173	145	ATV340D75N4E	On Request

*ATV340 display is optional - VW3A1113

Altivar™ Process Drives

How do you benefit from Altivar™ Process's application expertise?



ROD PUMPS



MIXERS



HOISTING

ATV900

- DC Bus sharing and 4Q apps. using ATV980/990
- Control all types of synchronous motors as well as async. motors in open or closed loop,
- Manage master/slave apps such as conveyor with multi drive link
- Increase asset life using dedicated hoisting, PCP/ESP and rod pump applications functions

Demanding Applications



ATV600

- Monitor energy consumption, energy based KPIs with 95% accuracy
- Monitor pump operation state and efficiency (BEP)
- Control multi pump applications in WWW & F&B environments with
- Dedicated motor & asset protection functions such as pump and pipe protection

Fluid & Gas Applications



FANS




CENTRIF. PUMPS



COMPRESSORS

Motor's Data Flow within EcoStruxure

EcoStruxure™
Innovation At Every Level

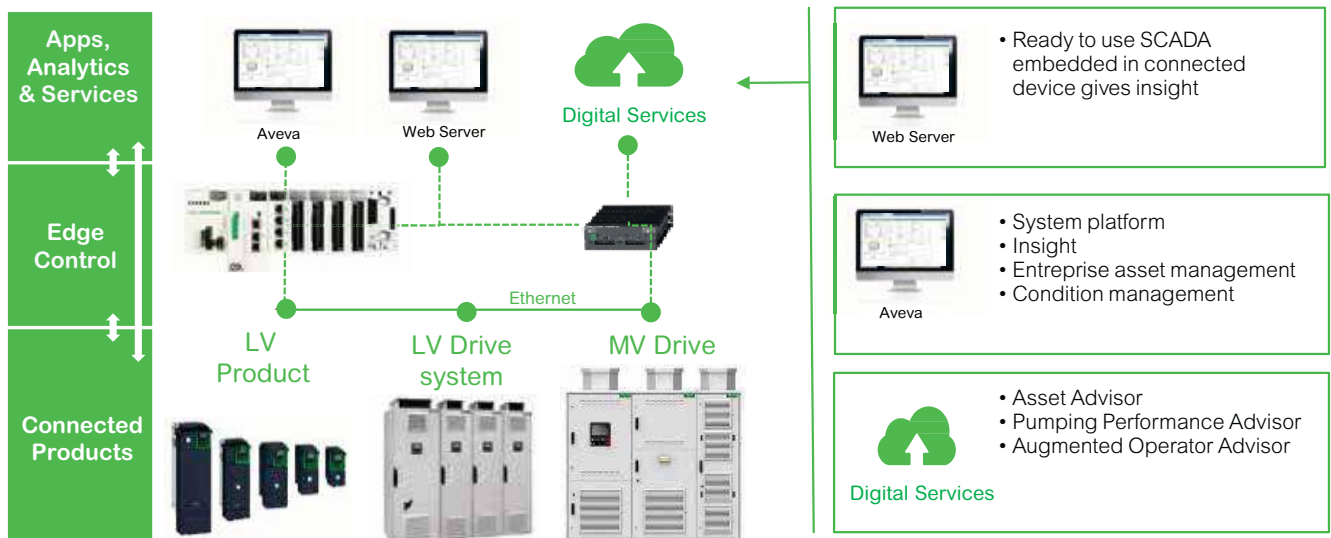

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar™ Process Drives for industrial utility applications

Altivar™ process drives deliver added-value services to enable business and process optimization through improved life cycle asset management and optimized energy consumption. Designed to assist OEMs, system integrators, and industrial process owners, Altivar™ process drives improve process performance by enabling full information and operational technology convergence. Embedded PlantStruxure™ and Foxboro™ Evo architectures simplify system integration.



Water applications

- Booster pumps
- Lift station pumps
- Desalination pumps
- Water supply pumps
- Water suction pumps
- Progressing cavity pumps
- Influent and effluent pumps
- Secondary clean water pumps



Oil & Gas applications

- Rod pumps
- Feed pumps
- Pipeline, booster, and unloading pumps
- Water injection pumps
- Reciprocating and centrifugal compressors
- Progressing cavity pumps
- Electric submersible pumps



Mining & Metals applications

- Rod pumps
- Feed pumps
- Pipeline, booster, and unloading pumps
- Water injection pumps
- Reciprocating and centrifugal compressors
- Progressing cavity pumps
- Electric submersible pumps



	Altivar 630	Altivar 650	Altivar 930	Altivar 950
Voltage	480	480	480	480
kW	0.75 – 315 kW	0.75 – 90 kW	0.75 – 315 kW	0.75 – 90 kW
Enclosure	UL Type 1 Heatsink kit option: 125 – 250 hp	UL Type 12	UL Type 1 Heatsink kit option: 125 – 250 hp	UL Type 12
Application functions	Multi-pump control, > 30 pump functions, fans, and simple material handling	Multi-pump control, > 30 pump functions, fans, and simple material handling	Load share, master slave, safety inputs, dynamic braking	Master slave, safety inputs, dynamic braking
Performance	Normal or heavy duty	Normal or heavy duty	High-torque capacity encoder options, dual Ethernet ports	High-torque capacity encoder options, dual Ethernet ports

Contact with Schneider Electric sales for country of origin.

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar™ Process ATV630 : Variable Speed IOT Drive dedicated to process

Industry and Utilities (Pump & Fan) from 0.75 kW to 315 kW.



- Alfa-numeric and graphical display to monitor trends and values
- Inbuilt features dedicated for Pump eg. Pump Curves, Pipe fill, Anti Jam, Pipe cleaning etc
- Calculative power consumption with respect to flow (kwh/m³)
- VFD designed for 50 deg C without derating.
- In Built choke & EMC Filter
- Integrated Modbus & Modbus TCP/IP (Ethernet)
- Web server inbuilt
- Ethernet & Modbus in Built
- QR code feature in built to get documents access on line and register service request directly from QR code.



kW		Max. continuous current (A)		Reference	Unit MRP ₹
ND	HD	ND	HD		
Three phase-Supply Voltage:380...480V (IP21)					
0.75	0.37	2.2	1.5	ATV630U07N4	On Request
1.5	0.75	4	2.2	ATV630U15N4	On Request
2.2	1.5	5.6	4	ATV630U22N4	On Request
3	2.2	7.2	5.6	ATV630U30N4	On Request
4	3	9.3	7.2	ATV630U40N4	On Request
5.5	4	12.7	9.3	ATV630U55N4	On Request
7.5	5.5	16.5	12.7	ATV630U75N4	On Request
11	7.5	23.5	16.5	ATV630D11N4	On Request
15	11	31.7	23.5	ATV630D15N4	On Request
18.5	15	39.2	31.7	ATV630D18N4	On Request
22	18.5	46.3	39.2	ATV630D22N4	On Request
30	22	61.5	46.3	ATV630D30N4	On Request
37	30	74.5	61.5	ATV630D37N4	On Request
45	37	88	74.5	ATV630D45N4	On Request
55	45	106	88	ATV630D55N4	On Request
75	55	145	106	ATV630D75N4	On Request
90	75	173	145	ATV630D90N4	On Request
110	90	211	173	ATV630C11N4	On Request
132	110	250	211	ATV630C13N4	On Request
160	132	302	250	ATV630C16N4	On Request
220	160	427	302	ATV630C22N4	On Request
250	220	481	387	ATV630C25N4	On Request
315	250	616	481	ATV630C31N4	On Request
Three phase-Supply Voltage: 380...480V (IP55)					
0.75	0.37	2.2	1.5	ATV650U07N4	On Request
1.5	0.75	4	2.2	ATV650U15N4	On Request
2.2	1.5	5.6	4	ATV650U22N4	On Request
3	2.2	7.2	5.6	ATV650U30N4	On Request
4	3	9.3	7.2	ATV650U40N4	On Request
5.5	4	12.7	9.3	ATV650U55N4	On Request
7.5	5.5	16.5	12.7	ATV650U75N4	On Request
11	7.5	23.5	16.5	ATV650D11N4	On Request
15	11	31.7	23.5	ATV650D15N4	On Request
18.5	15	39.2	31.7	ATV650D18N4	On Request
22	18.5	46.3	39.2	ATV650D22N4	On Request
30	22	61.5	46.3	ATV650D30N4	On Request
37	30	74.5	61.5	ATV650D37N4	On Request
45	37	88	74.5	ATV650D45N4	On Request
55	45	106	88	ATV650D55N4	On Request
75	55	145	106	ATV650D75N4	On Request
90	75	173	145	ATV650D90N4	On Request

N4Z without display, VW3A1111 advance display to be ordered separately

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar™ Process ATV930: Variable speed drives dedicated to constant torque application
with excellent motor control and connectivity capabilities (0.75kW to 315kW)



- Alfa-numeric and graphical display to monitor trends and values.
- Calculative power consumption with respect to flow (kwh/m^3).
- VFD designed for 50 deg C without derating.
- In Built choke & EMC Filter
- Integrated Modbus & dual Ethernet port
- Web server in built
- Macro configuration of hoisting & conveyor are available
- Ethernet & Modbus in Built
- QR code feature in built to get documents access on line and register service request directly from QR code.



kW		Max. continuous current (A)		Reference	Unit MRP ₹
ND	HD	ND	HD		
Three phase-Supply Voltage: 380...480V (IP21)					
0.75	0.37	2.2	1.5	ATV930U07N4	On Request
1.5	0.75	4	2.2	ATV930U15N4	On Request
2.2	0.75	5.6	4	ATV930U22N4	On Request
3	1.5	7.2	5.6	ATV930U30N4	On Request
4	2.2	9.3	7.2	ATV930U40N4	On Request
5.5	3	12.7	9.3	ATV930U55N4	On Request
7.5	4	16.5	12.7	ATV930U75N4	On Request
11	5.5	23.5	16.5	ATV930D11N4	On Request
15	7.5	31.7	23.5	ATV930D15N4	On Request
18.5	15	39.2	31.7	ATV930D18N4	On Request
22	18.5	46.3	39.2	ATV930D22N4	On Request
30	22	61.5	46.3	ATV930D30N4	On Request
37	30	74.5	61.5	ATV930D37N4	On Request
45	37	88	74.5	ATV930D45N4	On Request
55	45	106	88	ATV930D55N4C*	On Request
55	45	106	88	ATV930D55N4	On Request
75	55	145	106	ATV930D75N4C*	On Request
75	55	145	106	ATV930D75N4	On Request
90	75	173	145	ATV930D90N4C*	On Request
90	75	173	145	ATV930D90N4	On Request
110	90	211	173	ATV930C11N4C*	On Request
110	90	211	173	ATV930C11N4	On Request
132	110	250	211	ATV930C13N4C*	On Request
132	110	250	211	ATV930C13N4	On Request
160	132	302	250	ATV930C16N4C*	On Request
160	132	302	250	ATV930C16N4	On Request
220	160	427	302	ATV930C22N4C*	On Request
220	160	427	302	ATV930C22N4	On Request
250	200	481	387	ATV930C25N4C*	On Request
315	250	616	481	ATV930C31N4C*	On Request
Three phase-Supply Voltage: 380...480V (IP55)					
0.75	0.37	2.2	1.5	ATV950U07N4	On Request
1.5	0.75	4	2.2	ATV950U15N4	On Request
2.2	0.75	5.6	4	ATV950U22N4	On Request
3	1.5	7.2	5.6	ATV950U30N4	On Request
4	2.2	9.3	7.2	ATV950U40N4	On Request
5.5	3	12.7	9.3	ATV950U55N4	On Request
7.5	4	16.5	12.7	ATV950U75N4	On Request
11	5.5	23.5	16.5	ATV950D11N4	On Request
15	7.5	31.7	23.5	ATV950D15N4	On Request
18.5	15	39.2	31.7	ATV950D18N4	On Request
22	18.5	46.3	39.2	ATV950D22N4	On Request
30	22	61.5	46.3	ATV950D30N4	On Request
37	30	74.5	61.5	ATV950D37N4	On Request
45	37	88	74.5	ATV950D45N4	On Request
55	45	106	88	ATV950D55N4	On Request
75	55	145	106	ATV950D75N4	On Request
90	75	173	145	ATV950D90N4	On Request

*Reference ending with 'C' is without braking unit
N4Z without display, VW3A1111 advance display to be ordered separately
Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Altivar™ Process Modular ATV6XX/9XX LV Variable Speed Drive

Altivar™ Process Modular 110kW to 1200kW, 415V & 690V

***Coming Soon upto 2.6 MW**

The Altivar™ Process is the first services-oriented Low Voltage & Medium Voltage Drives allowing End Users with its energy management services and assets management capabilities, to:

- Measure their plant's energy consumption
- Control process equipment at its best efficiency
- Implement real-time asset management and predictive maintenance
- The Altivar™ Process Modular complete the Altivar Process line-up with a solution to address high end applications.
- The Altivar™ Process Modular offer partners capability to:
 - Lower inventories mix while providing flexibility for faster deliveries.
 - Standardized design and manufacturing processes of systems drives
 - Gain efficiency in servicing endcustomer
- Available in 48% THDi or with 3-level AFE design that is lower than 3% THDi and with less stress on motors.

Standard Offer

Drive Ratings For 380...480 V

Normal Duty - 400 V

Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)			Unit MRP [₹]
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1)		
		At 400 Vac			ATV600 (2)	ATV900 (3)	
	kW	A	kVA	A	A	A	
ATV•A0C11Q4	110	198	137	211	232	253	On Request
ATV•A0C13Q4	132	233	161	250	275	300	On Request
ATV•A0C16Q4	160	278	193	302	332	362	On Request
ATV•A0C20Q4	200	352	244	370	407	444	On Request
ATV•A0C25Q4	250	432	299	477	525	572	On Request
ATV•A0C31Q4	315	538	373	590	649	708	On Request
ATV•A0C35Q4	355	611	423	660	726	792	On Request
ATV•A0C40Q4	400	681	472	730	803	876	On Request
ATV•A0C45Q4	450	764	529	830	913	996	On Request
ATV•A0C50Q4	500	846	586	900	990	1,080	On Request
ATV•A0C56Q4	560	948	657	1,020	1,122	1,224	On Request
ATV•A0C63Q4	630	1,058	733	1,140	1,254	1,368	On Request
ATV•A0C71Q4	710	1,192	826	1,260	1,386	1,512	On Request
ATV•A0C80Q4	800	1,335	925	1,420	1,562	1,704	On Request
ATV•A0M10Q4	1000	1,692	1172	1,770	1,947	2,124	On Request

Heavy Duty - 400 V

Modular Single Drive	Nominal Power kW	Power Part Supply		Drive (output)			Unit MRP [₹]
		Input Current At 400 Vac	Apparent Power	Nominal Current (1)	Max. Transient current (1) (2)		
		A	kVA	A	ATV600	ATV900	
ATV•A0C11Q4	90	167	116	173	260	260	On Request
ATV•A0C13Q4	110	198	137	211	317	317	On Request
ATV•A0C16Q4	132	233	161	250	375	375	On Request
ATV•A0C20Q4	160	290	201	302	453	453	On Request
ATV•A0C25Q4	200	353	245	370	555	555	On Request
ATV•A0C31Q4	250	432	299	477	716	716	On Request
ATV•A0C35Q4	280	489	339	520	780	780	On Request
ATV•A0C40Q4	315	545	378	590	885	885	On Request
ATV•A0C45Q4	355	611	423	660	990	990	On Request
ATV•A0C50Q4	400	681	472	730	1,095	1,095	On Request
ATV•A0C56Q4	450	767	531	830	1,245	1,245	On Request
ATV•A0C63Q4	500	849	588	900	1,350	1,350	On Request
ATV•A0C71Q4	560	951	659	1,020	1,530	1,530	On Request
ATV•A0C80Q4	630	1,061	735	1,140	1,710	1,710	On Request
ATV•A0M10Q4	800	1,246	950	1,420	2,130	2,130	On Request

Normal Duty - 690 V

Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)			Unit MRP ₹
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1)		
		At 690 Vac			ATV600 (2)	ATV900 (3)	
	kW	A	kVA	A	A	A	
ATV•A0C11Q6	110	118	141	125	138	150	On Request
ATV•A0C13Q6	132	138	165	145	160	174	On Request
ATV•A0C16Q6	160	163	195	175	193	210	On Request
ATV•A0C20Q6	200	200	239	215	237	258	On Request
ATV•A0C25Q6	250	255	305	275	303	330	On Request
ATV•A0C31Q6	315	316	378	340	374	408	On Request
ATV•A0C40Q6	400	394	471	425	468	510	On Request
ATV•A0C50Q6	500	495	592	520	572	624	On Request
ATV•A0C63Q6	630	615	735	650	715	780	On Request
ATV•A0C80Q6	800	776	927	830	913	996	On Request
ATV•A0M10Q6	1,000	969	1,158	1,030	1,133	1,236	On Request
ATV•A0M12Q6	1,200	1,161	1,388	1,230	1,353	1,476	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Heavy Duty - 690 V

Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)			Unit MRP [₹]
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1) (2)		
		At 690 Vac			ATV600	ATV900	
	kW	A	kVA	A	A	A	
ATV•A0C11Q6	90	100	120	105	158	158	On Request
ATV•A0C13Q6	110	118	141	125	188	188	On Request
ATV•A0C16Q6	132	138	165	145	218	218	On Request
ATV•A0C20Q6	160	163	195	175	263	263	On Request
ATV•A0C25Q6	200	211	252	215	323	323	On Request
ATV•A0C31Q6	250	255	305	275	413	413	On Request
ATV•A0C40Q6	315	316	378	340	510	510	On Request
ATV•A0C50Q6	400	401	479	425	638	638	On Request
ATV•A0C63Q6	500	495	592	520	780	780	On Request
ATV•A0C80Q6	630	619	740	650	975	975	On Request
ATV•A0M10Q6	800	779	931	830	1,245	1,245	On Request
ATV•A0M12Q6	1,000	971	1,160	1,030	1,545	1,545	On Request

LH/Regen offer

Normal Duty - 400 V

Modular Single Drive	Nominal Power kW	Power Part Supply		Drive (output)			Unit MRP [₹]
		Input Current At 400 Vac	Apparent Power	Nominal Current (1)	Max. Transient current (1)		
		A	kVA	A	ATV600 (2) A	ATV900 (3) A	
ATV•B0C11Q4	110	175	121	211	232	253	On Request
ATV•B0C13Q4	132	208	144	250	275	300	On Request
ATV•B0C16Q4	160	252	174	302	332	362	On Request
ATV•B0C20Q4	200	313	217	370	407	444	On Request
ATV•B0C25Q4	250	389	270	477	525	572	On Request
ATV•B0C31Q4	315	491	340	590	649	708	On Request
ATV•B0C35Q4	355	553	383	660	726	792	On Request
ATV•B0C40Q4	400	620	429	730	803	876	On Request
ATV•B0C45Q4	450	697	483	830	913	996	On Request
ATV•B0C50Q4	500	775	537	900	990	1,080	On Request
ATV•B0C56Q4	560	868	601	1,020	1,122	1,224	On Request
ATV•B0C63Q4	630	971	673	1,140	1,254	1,368	On Request
ATV•B0C71Q4	710	1,094	758	1,260	1,386	1,512	On Request
ATV•B0C80Q4	800	1,227	850	1,420	1,562	1,704	On Request
ATV•B0M10Q4	1000	1,550	1074	1,770	1,947	2,124	On Request

Heavy Duty - 400 V

Modular Single Drive	Nominal Power kW	Power Part Supply		Drive (output)			Unit MRP [₹]
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1) (2)		
		At 400 Vac			ATV600	ATV900	
		A	kVA	A	A	A	
ATV•B0C11Q4	90	144	100	173	260	260	On Request
ATV•B0C13Q4	110	174	121	211	317	317	On Request
ATV•B0C16Q4	132	208	144	250	375	375	On Request
ATV•B0C20Q4	160	252	174	302	453	453	On Request
ATV•B0C25Q4	200	313	217	370	555	555	On Request
ATV•B0C31Q4	250	389	270	477	716	716	On Request
ATV•B0C35Q4	280	436	302	520	780	780	On Request
ATV•B0C40Q4	315	491	340	590	885	885	On Request
ATV•B0C45Q4	355	553	383	660	990	990	On Request
ATV•B0C50Q4	400	620	429	730	1,095	1,095	On Request
ATV•B0C56Q4	450	697	483	830	1,245	1,245	On Request
ATV•B0C63Q4	500	775	537	900	1,350	1,350	On Request
ATV•B0C71Q4	560	868	601	1,020	1,530	1,530	On Request
ATV•B0C80Q4	630	971	673	1,140	1,710	1,710	On Request
ATV•B0M10Q4	800	1,227	859	1,420	2,130	2,130	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025

LH/Regen offer

Normal Duty - 690 V

Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)		Unit MRP [₹]
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1)	
	kW	At 690 Vac	kVA	A	ATV600 (2) ATV900 (3)	
ATV•B0C11Q6	110	102	122	125	138 150	On Request
ATV•B0C13Q6	132	122	146	145	160 174	On Request
ATV•B0C16Q6	160	148	177	175	193 210	On Request
ATV•B0C20Q6	200	183	219	215	237 258	On Request
ATV•B0C25Q6	250	228	273	275	303 330	On Request
ATV•B0C31Q6	315	287	343	340	374 408	On Request
ATV•B0C40Q6	400	363	434	425	468 510	On Request
ATV•B0C50Q6	500	453	541	520	572 624	On Request
ATV•B0C63Q6	630	568	678	650	715 780	On Request
ATV•B0C80Q6	800	718	859	830	913 996	On Request
ATV•B0M10Q6	1,000	898	1,073	1,030	1,133 1,236	On Request
ATV•B0M12Q6	1,200	1,078	1,288	1,230	1,353 1,476	On Request

Heavy Duty - 690 V

Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)		Unit MRP [₹]
		Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1) (2)	
	kW	At 690 Vac	kVA	A	ATV600 ATV900	
ATV•B0C11Q6	90	85	101	105	158 158	On Request
ATV•B0C13Q6	110	102	122	125	188 188	On Request
ATV•B0C16Q6	132	122	146	145	218 218	On Request
ATV•B0C20Q6	160	148	177	175	263 263	On Request
ATV•B0C25Q6	200	183	219	215	323 323	On Request
ATV•B0C31Q6	250	228	273	275	413 413	On Request
ATV•B0C40Q6	315	287	343	340	510 510	On Request
ATV•B0C50Q6	400	362	433	425	638 638	On Request
ATV•B0C63Q6	500	453	541	520	780 780	On Request
ATV•B0C80Q6	630	569	680	650	975 975	On Request
ATV•B0M10Q6	800	718	859	830	1,245 1,245	On Request
ATV•B0M12Q6	1,000	898	1,073	1,030	1,545 1,545	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

APM Liquid Cooled Offer

Normal Duty - 415 V

ND		Power Part Supply		Drive (output)			
Modular Single Drive	Nominal Power	Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1)		Unit MRP [₹]
		At 690 Vac			ATV600	ATV900	
	kW	A	kVA	A	A	A	
ATV•L0C13Q4	132	244	169	250	275	300	On Request
ATV•L0C16Q4	160	287	199	302	332	362	On Request
ATV•L0C20Q4	200	350	242	370	407	444	On Request
ATV•L0C25Q4	250	429	297	477	525	572	On Request
ATV•L0C31Q4	315	536	371	590	649	708	On Request
ATV•L0C40Q4	400	684	474	730	803	876	On Request
ATV•L0C50Q4	500	847	587	900	990	1080	On Request
ATV•L0C63Q4	630	1056	732	1,140	1254	1,368	On Request
ATV•L0C80Q4	800	1335	925	1,420	1562	1,704	On Request
ATV•L0C90Q4	900	1502	1041	1,600	1760	1920	On Request
ATV•L0M10Q4	1000	1669	1156	1,770	1947	2124	On Request
ATV•L0M12Q4	1200	2005	1389	2,140	2354	2568	On Request
ATV•L0M15Q4	1500	2513	1741	2,680	2948	3216	On Request
ATV•L0M18Q4	1800	3028	2098	3,200	3520	3840	On Request

Heavy Duty - 415 V

HD		Power Part Supply		Drive (output)			
Modular Single Drive	Nominal Power	Input Current	Apparent Power	Nominal Current (1)	Max. Transient current (1)		Unit MRP [₹]
		At 690 Vac			ATV600	ATV900	
	kW	A	kVA	A	A	A	
ATV•L0C13Q4	110	210	145	211	317	317	On Request
ATV•L0C16Q4	132	244	169	250	375	375	On Request
ATV•L0C20Q4	160	287	199	302	453	453	On Request
ATV•L0C25Q4	200	350	242	370	555	555	On Request
ATV•L0C31Q4	250	429	297	477	716	716	On Request
ATV•L0C40Q4	315	549	380	590	885	885	On Request
ATV•L0C50Q4	400	684	474	730	1095	1095	On Request
ATV•L0C63Q4	500	847	587	900	1350	1350	On Request
ATV•L0C80Q4	630	1062	736	1140	1710	1710	On Request
ATV•L0C90Q4	710	1188	823	1260	1890	1890	On Request
ATV•L0M10Q4	800	1339	928	1420	2130	2130	On Request
ATV•L0M12Q4	1000	1669	1156	1770	2655	2655	On Request
ATV•L0M15Q4	1200	2005	1389	2140	3210	3210	On Request
ATV•L0M18Q4	1400	2341	1622	2470	3705	3705	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Normal Duty - 690 V

ND Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)		Unit MRP [₹]
		Input Current At 690 Vac	Apparent Power	Nominal Current (1)	Max. Transient current (1) ATV600 ATV900	
	kW	A	kVA	A	A A	
ATV•L0C20Q6	200	218	261	215	237 258	On Request
ATV•L0C28Q6	280	290	347	308	339 370	On Request
ATV•L0C31Q6	315	322	385	340	374 408	On Request
ATV•L0C40Q6	400	399	477	425	468 510	On Request
ATV•L0C45Q6	450	446	533	480	528 576	On Request
ATV•L0C56Q6	560	563	673	590	649 708	On Request
ATV•L0C71Q6	710	700	837	740	814 888	On Request
ATV•L0C90Q6	900	875	1046	930	1023 1,116	On Request
ATV•L0M12Q6	1200	1260	1506	1,230	1353 1,476	On Request
ATV•L0M14Q6	1400	1355	1619	1,425	1568 1710	On Request
ATV•L0M16Q6	1600	1547	1849	1,620	1782 1944	On Request
ATV•L0M18Q6	1800	1740	2080	1,820	2002 2184	On Request
ATV•L0M22Q6	2200	2120	2543	2,220	2442 2664	On Request
ATV•L0M26Q6	2600	2517	3008	2,620	2882 3144	On Request

Heavy Duty - 690 V

HD Modular Single Drive	Nominal Power	Power Part Supply		Drive (output)		Unit MRP [₹]
		Input Current At 690 Vac	Apparent Power	Nominal Current (1)	Max. Transient current (1) ATV600 ATV900	
	kW	A	kVA	A	A A	
ATV•L0C20Q6	160	184	220	175	263 263	On Request
ATV•L0C28Q6	220	236	282	240	360 360	On Request
ATV•L0C31Q6	250	262	313	275	413 413	On Request
ATV•L0C40Q6	315	322	385	340	510 510	On Request
ATV•L0C45Q6	355	359	429	384	576 576	On Request
ATV•L0C56Q6	450	462	552	480	720 720	On Request
ATV•L0C71Q6	560	563	673	590	885 885	On Request
ATV•L0C90Q6	710	700	837	740	1110 1110	On Request
ATV•L0M12Q6	1000	976	1166	1030	1545 1545	On Request
ATV•L0M14Q6	1100	1070	1279	1130	1695 1695	On Request
ATV•L0M16Q6	1300	1262	1508	1330	1995 1995	On Request
ATV•L0M18Q6	1400	1357	1622	1425	2138 2138	On Request
ATV•L0M22Q6	1700	1644	1955	1720	2580 2580	On Request
ATV•L0M26Q6	2100	2030	2426	2120	3180 3180	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Reduce mechanical stress on your machines

Altistart™ ATS01

Altivar™ ATS130

Altistart™ ATS22

Altivar Soft Starter ATS430

Newly
Launched

Altivar™ Soft Starter ATS480

Altivar Soft Starter ATS490

Newly
Launched

Complete range of soft starters from 0.37 kW (3 Amps)
to 900 kW (1200 Amps)



Altivar™ Soft Starters: 3 ranges to match your applications



Main data on Altivar™ Soft Starters

	ATS01	ATS130	ATS22	ATS430	ATS480	ATS490
Us rated operational voltage	110 to 480V single phase 110 to 480V 3 phase	200 to 480V	230 to 440V 208 to 600V	208-600V 3 phase	208 to 690V	209-690V 3 phase
Rated operational current	3 to 12A (1 ph) –6 to 32A (3ph)	38 to 105A	17 to 590A	17-590A	17 to 1200A	17-1200A
Power range	0,37 to 15kW	11 to 55kW	4 to 400kW	4-400kW (3-500HP)	4 to 900kW	2-900kW
UcControl supply voltage	24V AC/DC 110-240Vac	24V DC	110 to 230Vac	110-230V	110 to 230Vac	115-230V
Connectivity	-	-	Modbus	Modbus, Modbus TCP, EtherNet/IP, PROFIBUS DP V1, CANopen, Profinet	Modbus, Modbus TCP, EtherNet/IP, Profinet, Profibus DP, CANopen	Modbus, Modbus TCP, EtherNet/IP, PROFIBUS DP V1, CANopen, Profinet
Type of control	Voltage ramp	Voltage ramp	Voltage control	Torque control	Torque Control, voltage control	Torque control
Current limitation	-	-	350% I _e	500% I _e up to 700% motor I _n	500% I _e (up to 700% rated motor current)	-
Stop mode	Freewheel, voltage ramp	Freewheel, voltage ramp	Freewheel, voltage ramp	Freewheel, voltage ramp	Torque ramp, voltage ramp, dynamic braking, DC injection	-
Thermal protections Other protections	-	-	Electronic Underload, overload, motor phase loss, line phase inversion excessive acceleration time, current overload, ground leakage	Electronic thermal relay, PTC, underload, motor phase loss, line phase inversion, excessive acceleration time, ground leakage	Electronic, PTC, PT100 2 or 3 wires Underload, overload, motor phase loss, line phase inversion excessive acceleration time, current overload, ground leakage	-

Soft Starter

ATS01 – Soft Starter for Simple Machine



[Us] Rated Supply Voltage	Network Number of Phases	Motor Power kW	Starting Time	[Ie] Rated Operational Current (A)	Reference	Unit MRP [₹]
380....415V 50.....60Hz	3	1.5kW/2.2kW/3kW	adjustable from 1 to 10s	6	ATS01N206QN	On Request
	3	4kW	adjustable from 1 to 10s	9	ATS01N209QN	On Request
	3	5.5kW	adjustable from 1 to 10s	12	ATS01N212QN	On Request
	3	7.5kW/11kW	adjustable from 1 to 10s	22	ATS01N222QN	On Request
	3	15kW	adjustable from 1 to 10s	32	ATS01N232QN	On Request

**ATS130 - Power Extension of
ATS01 from 38 Amp to 105 Amp**


- ATS130 Soft motor Starter solution, an alternative to DOL motor Starter for control panel flexibility
- Increase the competitiveness of customer design
 - Reduce space in cabinet
 - Save time during installation
 - Easy commissioning
- No preventive maintenance

Nominal Power in kW			Nominal Current (Amps)	Reference	Unit MRP [₹]
230 Vac	400 Vac	440 Vac			
11	18.5	22	38	ATS130N2D38LT	On Request
11	22	22	45	ATS130N2D45LT	On Request
18.5	30	37	65	ATS130N2D65LT	On Request
22	37	45	73	ATS130N2D73LT	On Request
22	45	45	80	ATS130N2D80LT	On Request
30	55	55	105	ATS130N2C11LT	On Request

ATS22 - Soft Starter for Utilities (Pump & fan)



- Embedded shorting contactor
- Size reduction: average of 25% less compare to ATS48 alone (without additional by-pass)
- Full starter and motor protections
- True three phases control
- Modbus in Built

kW (400 V)	Nominal Current (Amps)	Reference	Unit MRP [₹]
Three phase-Supply Voltage: 230V...440V			
7.5	17	ATS22D17Q	On Request
15	32	ATS22D32Q	On Request
22	47	ATS22D47Q	On Request
30	62	ATS22D62Q	On Request
37	75	ATS22D75Q	On Request
45	88	ATS22D88Q	On Request
55	110	ATS22C11Q	On Request
75	140	ATS22C14Q	On Request
90	170	ATS22C17Q	On Request
110	210	ATS22C21Q	On Request
132	250	ATS22C25Q	On Request
160	320	ATS22C32Q	On Request
220	410	ATS22C41Q	On Request
250	480	ATS22C48Q	On Request
315	590	ATS22C59Q	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar Soft Starter ATS430

From 17A to 590A

The new ATS430 offers effective motor management for standard machines in industrial applications.

Competitiveness

- **Optimize time from design to operation** thanks to integration in EcoStruxure™ solutions.
- **Reduce overall cost:** No need to add external equipment, as essential functions for efficient motor management are built-in.

Effective Motor Management

- **Best in class motor control:** Application requirements are mastered by the torque control system, motor and application are monitored.
- **High durability to increase machine uptime:** designed for high reliability level, the ATS430 offers condition monitoring, upgradability and repairability.

Sustainability

- **Environmental performance:** ATS430 integrates biobased plastic, ASI-certified aluminum and recycled cardboard packaging.
- **Energy efficient:** efficiency > 99.5%, ATS430 is integrated in EcoStruxure™ Power Monitoring Expert



- Device condition monitoring
- Energy and power monitoring
- Cybersecurity best practices
- Torque control system
- Integrated bypass relays

Altivar Soft Starter ATS430



- Integrated bypass
- Effective
- Performance with Torque Control, the original
- Direct connection to automation (Modbus open style)
- High usability
- Increased uptime and lifetime
- High reliability
- Condition monitoring of the device
- Help to protect your machine operations
- Best Cybersecurity practices
- Role Based Access Control, PIN code

Next Gen Soft Starter for standard industrial machines, normal duty applications, from 17 to 590A.

From 4 to 400kW (3 to 500HP)

Ue = 208 to 600V 3 phase

Us = 115 to 230VAC

Nominal Current (Amps)	Reference	Unit MRP [€]
Three phase-Supply Voltage: 208V...600V		
17	ATS430D17S6	On Request
32	ATS430D32S6	On Request
47	ATS430D47S6	On Request
62	ATS430D62S6	On Request
75	ATS430D75S6	On Request
88	ATS430D88S6	On Request
110	ATS430C11S6	On Request
140	ATS430C14S6	On Request
170	ATS430C17S6	On Request
210	ATS430C21S6	On Request
250	ATS430C25S6	On Request
320	ATS430C32S6	On Request
410	ATS430C41S6	On Request
480	ATS430C48S6	On Request
590	ATS430C59S6	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Altivar™ Soft Starter ATS480



The Altivar™ Soft Starter ATS480 is the next evolution of soft starters for digitization, while meeting cybersecurity standard. Designed to address process and infrastructures, ATS480 simplifies projects execution and maximizes the availability of your applications, even in the most demanding environments.

ATS480 builds on the proven robustness and stop/ starting performance of the ATS48.

ATS480 extends the lifetime of ATS48 equipment and preserves your initial investment by reusing current design.

Benefits

Reduced engineering time and cost

- The integration of Altivar Soft Starter ATS480 in EcoStruxure™ Apps and software for Automation and Power drastically simplify architecture selection, detailed design and execution.

Reliability for your operations

- Highly robust and reliable even for the most demanding applications or in harsh environments
- Flexibility to improve the continuity of service of your applications

Cybersecure

- User account management to enforce authorization
- ATS480 has enhance cybersecurity features built-in to restrict or disable port and services
- Threat intelligence to generate security related reports
- Secure boot and firmware upgrade

Complete solution for Process & Infrastructures projects



Only 1 range 208/690 V from 4 to 900kW



Options and accessories common to Altivar™

Altivar " Soft Starter ATS480 characteristics

Us Rated operational voltage	208 to 690V
Ie rated operational current	17 to 1700A
Pe Power range	4 to 900kW
Application type	Normal and heavy duty
Control Type	Torque control, the original
Current limitation	500% Ie up to 700% motor In
Stop mode	Torque ramp, dynamic braking, DC injection
Motor thermal protection	Embedded electronic thermal relay, PTC, PT100
Connectivity	Modbus serial (embedded)
	Modbus TCP
	EtherNet/IP PROFINET
	PROFIBUS DP CANopen
Markings and Certifications	CE, c.UL.us, CCC, EAC, RCM, UKCA, DNV ABS, BV CCS

Soft Starter Selection

Refer to the following table to select ATS480 compatible with the ATS48 to substitute.

Legacy offers			New offers
ATS48●●●Q 230...415 Vac	ATS48●●●Y 208...690 Vac		ATS480●●●Y 208...690 Vac
ATS48D17Q	ATS48D17Y		ATS480D17Y
ATS48D22Q	ATS48D22Y		ATS480D22Y
ATS48D32Q	ATS48D32Y		ATS480D32Y
ATS48D38Q	ATS48D38Y		ATS480D38Y
ATS48D47Q	ATS48D47Y		ATS480D47Y
ATS48D62Q	ATS48D62Y		ATS480D62Y
ATS48D75Q	ATS48D75Y		ATS480D75Y
ATS48D88Q	ATS48D88Y		ATS480D88Y
ATS48C11Q	ATS48C11Y		ATS480C11Y
ATS48C14Q	ATS48C14Y		ATS480C14Y
ATS48C17Q	ATS48C17Y		ATS480C17Y
ATS48C21Q	ATS48C21Y		ATS480C21Y
ATS48C25Q	ATS48C25Y		ATS480C25Y
ATS48C32Q	ATS48C32Y		ATS480C32Y
ATS48C41Q	ATS48C41Y		ATS480C41Y
ATS48C48Q	ATS48C48Y		ATS480C48Y
ATS48C59Q	ATS48C59Y		ATS480C59Y
ATS48C66Q	ATS48C66Y		ATS480C66Y
ATS48C79Q	ATS48C79Y		ATS480C79Y
ATS48M10Q	ATS48M10Y		ATS480M10Y
ATS48M12Q	ATS48M12Y		ATS480M12Y

The specific legacy references and their functionality are included in the substitution:

Specific Legacy offers		New offers
ATS48●●●YS316, ability to set in Delta up to 500 V		ATS480●●●Y
ATS48●●●YS338, tropicalization coating		
ATS48●●●QS338, tropicalization coating		

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Green Premium™

Enhance sustainability with Altivar™ Soft Starter ATS480

Superior environmental performance thanks to upgradability and modernization solutions

Altivar™ Soft Starter ATS480 is RoHS and REACH compliant

- Transparent environment information
- Life Cycle Analysis, compliant with ISO 14025
- Circularity Profile

Altivar™ Soft Starter ATS480 brings key benefits to help you achieve **superior upgradable performance** by enhancing its embedded functionality and performance capabilities for both hardware and software. ATS480 also extends the service life of ATS48 equipment: ATS480 replaces ATS48 while keeping the same footprint, circuit breaker, contactors, cables, and behavior of the process, making way for evolution.

The **additional power options** and the **cybersecurity-compliant firmware upgradability** capabilities of the Altivar™ Soft Starter ATS480 can help you to maximize process continuity and operation, as well as reduce your operational expenses, by avoiding the need to replace your soft starter or modify your existing installation as a retrofit.

Benefits

- Enable a **secure** and **digital** area
- Reduce your **engineering time and cost**
- Help to **secure** your **operations**
- **Reduce downtime**
- **Extend the service life** of ATS48 equipment
- Make way for **evolution**
- **Preserve** your **initial investment**



Experience our offer on
se.com/green-premium

Communication and Wi-Fi modules

The additional communication modules allow you to easily integrate Altivar™ Soft Starter ATS480 in your scalable automation system. Together with the Wi-Fi access point, they bring easy access to the real data provided by the soft starter, aiding its digitization and easy integration in Industry 4.0 technologies.

Cybersecurity-compliant firmware upgrade

You have the possibility to upgrade the Altivar™ Soft Starter ATS480 firmware. Available on se.com, the firmware is digitally signed and can only be applied if authenticity is verified by the ATS480.

Graphic display terminal and dynamic QR code

In addition to the detailed warnings and detected errors available on the removable plain text display terminal, the graphic display terminal provides contextual troubleshooting and direct access to the appropriate page of the documentation via a dynamic QR code.

Power options (line chokes, bypass contactor)

The power options of Altivar™ Soft Starter ATS480 bring you the possibility to improve the power quality and efficiency of your installation. These options also improve the continuity of service of the installation and its robustness.



Product selector
for ATS480



EcoStruxure™ Motor
Control Configurator



EcoStruxure™ Motor
Management Design

Altistart™ 480

ATS480 in-line									
Motor nameplate							ATS480		
Rated operational voltage (Ue)									
Rated motor power									
230 V	400 V	440 V	500 V	525 V	660 V	690 V			
kW	kW	kW	kW	kW	kW	kW	Reference	Unit MRP ₹	
Normal duty applications									
4	7.5	7.5	9	9	11	15	ATS480D17Y	On Request	
5.5	11	11	11	11	15	18.5	ATS480D22Y	On Request	
7.5	15	15	18.5	18.5	22	22	ATS480D32Y	On Request	
9	18.5	18.5	22	22	30	30	ATS480D38Y	On Request	
11	22	22	30	30	37	37	ATS480D47Y	On Request	
15	30	30	37	37	45	45	ATS480D62Y	On Request	
18.5	37	37	45	45	55	55	ATS480D75Y	On Request	
22	45	45	55	55	75	75	ATS480D88Y	On Request	
30	55	55	75	75	90	90	ATS480C11Y	On Request	
37	75	75	90	90	110	110	ATS480C14Y	On Request	
45	90	90	110	110	132	160	ATS480C17Y	On Request	
55	110	110	132	132	160	200	ATS480C21Y	On Request	
75	132	132	160	160	220	250	ATS480C25Y	On Request	
90	160	160	220	220	250	315	ATS480C32Y	On Request	
110	220	220	250	250	355	400	ATS480C41Y	On Request	
132	250	250	315	315	400	500	ATS480C48Y	On Request	
160	315	355	400	400	560	560	ATS480C59Y	On Request	
–	355	400	–	–	630	630	ATS480C66Y	On Request	
220	400	500	500	500	710	710	ATS480C79Y	On Request	
250	500	630	630	630	900	900	ATS480M10Y	On Request	
355	630	710	800	800	–	–	ATS480M12Y	On Request	
Heavy duty applications									
3	5.5	5.5	7.5	7.5	9	11	ATS480D17Y	On Request	
4	7.5	7.5	9	9	11	15	ATS480D22Y	On Request	
5.5	11	11	11	11	15	18.5	ATS480D32Y	On Request	
7.5	15	15	18.5	18.5	22	22	ATS480D38Y	On Request	
9	18.5	18.5	22	22	30	30	ATS480D47Y	On Request	
11	22	22	30	30	37	37	ATS480D62Y	On Request	
15	30	30	37	37	45	45	ATS480D75Y	On Request	
18.5	37	37	45	45	55	55	ATS480D88Y	On Request	
22	45	45	55	55	75	75	ATS480C11Y	On Request	
30	55	55	75	75	90	90	ATS480C14Y	On Request	
37	75	75	90	90	110	110	ATS480C17Y	On Request	
45	90	90	110	110	132	160	ATS480C21Y	On Request	
55	110	110	132	132	160	200	ATS480C25Y	On Request	
75	132	132	160	160	220	250	ATS480C32Y	On Request	
90	160	160	220	220	250	315	ATS480C41Y	On Request	
110	220	220	250	250	355	400	ATS480C48Y	On Request	
132	250	250	315	315	400	500	ATS480C59Y	On Request	
160	315	355	400	400	560	560	ATS480C66Y	On Request	
–	355	400	–	–	630	630	ATS480C79Y	On Request	
220	400	500	500	500	710	710	ATS480M10Y	On Request	
250	500	630	630	630	900	900	ATS480M12Y	On Request	

Please contact Customer Care Center for Stockable and Non stockable status of references.

 **NORMAL STOCK ITEMS**

W.E.F. July 15th, 2025



Altivar Soft Starter ATS490

From 17A to 1200A



**Green
Premium™**

Sustainable
performance,
by design

Discover the innovative features, and high durability performance of Altivar Soft Starter ATS490 that leads to the optimization of the project cost and provides a holistic vision for energy and asset management. Downtime and maintenance costs are reduced even for the most demanding application keeping safety and security.

Improve competitiveness

CapEx reduction through integration, removing external devices. OpEx reduction through high durability and data reporting

Improve sustainability

99.5% efficiency with integrated bypass
power and energy monitoring
Plastic with bio-based content (>20%), ASI certified aluminium compliant with REACH and RoHS

Improve operational resilience

Torque control, the original high durability and integrated condition monitoring

Cybersecurity certified

IEC 62443-4-2 SL1
Extend the lifespan with reparability and upgrade

Safe Torque Off certified
IEC 61508 SIL 1
IP20 protection degree as standard up to 110A, with protective covers up to 660A



Certified Cybersecurity Features

Altivar Soft Starter ATS490



- Integrated bypass
- Cybersecurity features certified IEC 62443-3-2 SL1
- Safe Torque Off certified IEC61508 SIL1
- Ethernet embedded : Modbus TCP, Ethernet/IP
- Differentiated equipment design to reduce CapEx
- Digital data reporting for Energy, asset management and high durability to reduce OpEx.

Next Gen Soft Starter for process and infrastructure, normal and Heavy duty applications, from 17 to 1200A

From 3 to 900kW (1200HP)

Ue = 208 to 690V 3 phase

Us = 115 to 230VAC

Nominal Current (Amps)	Reference	Unit MRP [₹]
Three phase-Supply Voltage: 208V...690V		
17	ATS490D17Y	On Request
22	ATS490D22Y	On Request
32	ATS490D32Y	On Request
38	ATS490D38Y	On Request
47	ATS490D47Y	On Request
52	ATS490D62Y	On Request
75	ATS490D75Y	On Request
88	ATS490D88Y	On Request
110	ATS490C11Y	On Request
140	ATS490C14Y	On Request
170	ATS490C17Y	On Request
210	ATS490C21Y	On Request
250	ATS490C25Y	On Request
320	ATS490C32Y	On Request
410	ATS490C41Y	On Request
480	ATS490C48Y	On Request
590	ATS490C59Y	On Request
660	ATS490C66Y	On Request
790	ATS490C79Y	On Request
1000	ATS490M10Y	On Request
1200	ATS490M12Y	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Harmony Relays

Electromechanical, Timer and control Relays

Enhance **operational efficiency** and **optimize equipment availability** with our widest range of relays. Harmony relays are designed, manufactured, and tested to meet your needs for both wired logic functions and PLC Interfaces.



- **Wide choice:** 1C/O 10 A – 2C/O 5 A, 24 VDC – 230 VAC, multifunctional features
- **Robust installation:** fast-on pin terminal
- **Easy to use:** optional status indication and test function
- **Safe to perform:** feasibility to add protection modules (diode, diode + LED, RC circuit, or varistor + LED)
- **Space saving:** only 16 mm socket for 2C/O
- **Complies:** to CE, UL, CSA, EAC

RXG Interface Relays

NEW

Description	Relay	Control Circuit Voltage (V)		Reference	Unit MRP ₹
1CO 6 Pin Relay Standard cover lockable test button					
Without LED indicator	1 CO - 10 A	24V	DC	RXG11BD	603
	1 CO - 10 A	120V	AC	RXG11F7	795
	1 CO - 10 A	230V	AC	RXG11P7	750
With LED indicator	1 CO - 10 A	24V	DC	RXG12BD	680
	1 CO - 10 A	120V	AC	RXG12F7	816
	1 CO - 10 A	230V	AC	RXG12P7	816
2CO 8 Pin Relay Standard cover lockable test button					
Without LED indicator	2 CO - 5 A	24V	DC	RXG21BD	679
	2 CO - 5 A	120V	AC	RXG21F7	824
	2 CO - 5 A	230V	AC	RXG21P7	808
With LED indicator	2 CO - 5 A	24V	DC	RXG22BD	755
	2 CO - 5 A	120V	AC	RXG22F7	908
	2 CO - 5 A	230V	AC	RXG22P7	908
Sockets for relay					
For Relay RXG1, screw				RGZE1S35M	373
For Relay RXG2, screw				RGZE1S48M	412



Easy Harmony RXG

NEW

Description	Relay	Control Circuit Voltage (V)		Reference	Unit MRP ₹
1CO 6 Pin Relay Standard (without Test button)					
With LED	1 CO - 10 A	24	DC	RXG16BD	314
	1 CO - 10 A	230	AC	RXG16P7	376
Without LED	1 CO - 10 A	24	DC	RXG18BD	282
	1 CO - 10 A	230	AC	RXG18P7	339
Socket				RGZE05E	157
2CO 8 Pin Relay Basic cover (without Test button)					
With LED	2 CO - 5 A	24	DC	RXG26BD	376
	2 CO - 5 A	230	AC	RXG26P7	418
Without LED	2 CO - 5 A	24	DC	RXG28BD	339
	2 CO - 5 A	230	AC	RXG28P7	376
Socket				RGZE08E	173

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



- 5A relay with 2C/O contacts or 3A relay with 4 C/O contacts
- Mechanical indicator with transparent cover
- Power On" LED for readiness
- Socket for both DIN-rail and panel mounting
- Eco-design with ROHS, CE, GOST

RXM Miniature Relays

Description	Relay	Control Circuit Voltage (V)		Reference	Unit MRP ₹
2 CO 8 Pin relays Without lockable test button					
Without LED indicator	2 CO - 5 A	24V	DC	RXM2LB1BD	448
	2 CO - 5 A	24V	AC	RXM2LB1B7	469
	2 CO - 5 A	120V	AC	RXM2LB1F7	469
	2 CO - 5 A	230V	AC	RXM2LB1P7	458
With LED indicator	2 CO - 5 A	24V	DC	RXM2LB2BD	482
	2 CO - 5 A	48V	DC	RXM2LB2ED	517
	2 CO - 5 A	24V	AC	RXM2LB2B7	517
	2 CO - 5 A	120V	AC	RXM2LB2F7	517
	2 CO - 5 A	230V	AC	RXM2LB2P7	482
4 CO 14 Pin relays Without lockable test button					
Without LED indicator	4 CO - 3 A	12V	DC	RXM4LB1JD	633
	4 CO - 3 A	24V	DC	RXM4LB1BD	517
	4 CO - 3 A	24V	AC	RXM4LB1B7	569
	4 CO - 3 A	230V	AC	RXM4LB1P7	517
With LED indicator	4 CO - 3 A	12V	DC	RXM4LB2JD	583
	4 CO - 3 A	24V	DC	RXM4LB2BD	546
	4 CO - 3 A	48V	DC	RXM4LB2ED	583
	4 CO - 3 A	24V	AC	RXM4LB2B7	583
	4 CO - 3 A	120V	AC	RXM4LB2F7	583
	4 CO - 3 A	230V	AC	RXM4LB2P7	546

Description	Type	Reference	Unit MRP [₹]
Sockets			
Mixed,screw clamp term, for RXM2L range	Socket	RXZE1M2C	227
Mixed,screw clamp term, for RXM4L range	Socket	RXZE1M4C	289
Metal clamp for RXZE1M2C	Accessory	RXZ420	54

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Description	Connection	Relay Type	Reference	Unit MRP [₹]
Sockets for RXMNB Relays				
Mixed	Screw Clamp connector	RXM2N	RXZE2M2N	242
Mixed	Screw Clamp connector	RXM4N	RXZE2M4N	276

RPM Power Relay

Description	Relay	Control Circuit Voltage (V)		Reference	Unit MRP [₹]
Power Relay					
With LED Indicators	1 CO - 15 A	24V	DC	RPM12BD	943
	2 CO - 15 A	24 V	DC	RPM22BD	1252
	2 CO - 15 A	120V	AC	RPM22F7	1683
	2 CO - 15 A	230V	AC	RPM22P7	1411
	3 CO - 15 A	24V	DC	RPM32BD	1593
	3 CO - 15 A	230V	AC	RPM32P7	1626
	4 CO - 15 A	24V	DC	RPM42BD	1532
	4 CO - 15 A	110V	DC	RPM42FD	1661
	4 CO - 15 A	24V	AC	RPM42B7	1515
	4 CO - 15 A	110V	AC	RPM42F7	1701
	4 CO - 15 A	230V	AC	RPM42P7	1505

Description	Connection	Relay Type	Reference	Unit MRP [₹]
Sockets				
Mixed	Screw Clamp connector	RPM1	RPZF1	607
Mixed	Screw Clamp connector	RPM2	RPZF2	609
Mixed	Screw Clamp connector	RPM3	RPZF3	1076
Mixed	Screw Clamp connector	RPM4	RPZF4	1040
Clips And Legends				
Metal maintaining clamp - for relay socket RPZF1			RPZR235	163

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



- High-performance EMR Relays to ensure machine and system availability.
- Flexible choices with different contact numbers, current, and control coil voltages.
- 12A relay with 2C/O contacts or 6A relay with 4 C/O contacts
- One step lockable test button
- Mechanical indicator for contact status
- Power on" LED for readines

RXM Miniature Relays

Description	Relay	Control Circuit Voltage (V)	Reference	Unit MRP [₹]
2CO 8 Pin Relay Standard cover lockable test button				
Without LED indicator	2 CO - 12 A	12V	DC RXM2AB1JD	706
	2 CO - 12 A	24V	DC RXM2AB1BD	679
	2 CO - 12 A	48V	DC RXM2AB1ED	745
	2 CO - 12 A	110V	DC RXM2AB1FD	712
	2 CO - 12 A	48V	AC RXM2AB1E7	706
	2 CO - 12 A	120V	AC RXM2AB1F7	706
	2 CO - 12 A	230V	AC RXM2AB1P7	679
2CO 8 Pin Relay Standard cover lockable test button				
With LED Indicator	2 CO - 12 A	12V	DC RXM2AB2JD	736
	2 CO - 12 A	24V	DC RXM2AB2BD	706
	2 CO - 12 A	48V	DC RXM2AB2ED	778
	2 CO - 12 A	110V	DC RXM2AB2FD	723
	2 CO - 12 A	24V	AC RXM2AB2B7	731
	2 CO - 12 A	48V	AC RXM2AB2E7	723
	2 CO - 12 A	120V	AC RXM2AB2F7	736
Without LED indicator	4 CO - 6 A	12V	DC RXM4AB1JD	845
	4 CO - 6 A	24V	DC RXM4AB1BD	845
	4 CO - 6 A	48V	DC RXM4AB1ED	941
	4 CO - 6 A	110V	DC RXM4AB1FD	941
	4 CO - 6 A	24V	AC RXM4AB1B7	862
	4 CO - 6 A	48V	AC RXM4AB1E7	886
	4 CO - 6 A	120V	AC RXM4AB1F7	862
With LED Indicator	4 CO - 6 A	230V	AC RXM4AB1P7	862
	4 CO - 6 A	12V	DC RXM4AB2JD	985
	4 CO - 6 A	24V	DC RXM4AB2BD	935
	4 CO - 6 A	48V	DC RXM4AB2ED	985
	4 CO - 6 A	110V	DC RXM4AB2FD	985
	4 CO - 6 A	24V	AC RXM4AB2B7	1003
	4 CO - 6 A	48V	AC RXM4AB2E7	1003
	4 CO - 6 A	120V	AC RXM4AB2F7	1003
Without LED indicator	4 CO - 6 A	230V	AC RXM4AB2P7	954

RXM Miniature Relays

Description	Connection	Relay Type	Thermal Current (lth)	Reference	Unit MRP [₹]
Sockets					
Mixed contact	Screw Clamp	RXM2* / RXM4*	10A	RXZE2M114	354
	Screw Connector	RXM2* / RXM4*	10A	RXZE2M114M	318
Separate	Screw Connector	RXM2*	12A	RXZE2S108M	369
	Screw Connector	RXM3*	10A	RXZE2S111M	408
	Screw Connector	RXM4*	10A	RXZE2S114M	436

Description	Voltage V	For use with	Reference	Unit MRP [₹]
Sockets				
Diode	6...250 V DC	All Aockets	RXM040W	166
RC Circuit	24..60 V AC	All Aockets	RXM041BN7	178
	110..240 V AC	All Aockets	RXM041FU7	178
Varistor	6..24 V AC/DC	All Aockets	RXM021RB	209
	24..60 V AC/DC	All Aockets	RXM021BN	209
	110..240 V AC/DC	All Aockets	RXM021FP	199

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



RE17 Electronic Timers

NEW

Description	Supply Voltage	Time Range	Output	Reference	Unit MRP [€]
RE10 Timers					
MultiFunction	24 V DC, 24...240 V AC	1 s .. 100 h	1 CO	RE10RMMU	2211
RE17 Timers					
On Delay	24 ...240 V AC/DC	0.1 s .. 100 h	1 CO SS	RE17LAMW	3114
Off -delay	24 ...240 V AC	1 s .. 100 h	1 CO SS	RE17LCBM	3641
Interval on delay	24 ...240 V AC	1 s .. 100 h	1 CO SS	RE17LHBM	4658
Asymmetrical flashing	24 ...240 V AC	1 s .. 100 h	1 CO SS	RE17LLBM	3827
Multifunction	24 ...240 V AC	1 s .. 100 h	1 CO SS	RE17LMBM	3749
On Delay	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RAMU	2921
Single Interval	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RBMU	4342
Off- Delay	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RCMU	3056
Interval on delay	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RHMU	3143
Asymmetrical flashing	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RLMU	4085
Multifunction	12 V DC	1 s .. 100 h	1 CO	RE17RMJU	3864
Multifunction	24 VDC /24...240 VAC	1 s .. 100 h	1 CO	RE17RMMU	3755
Multifunction	12 ...240 VAC/DC	0.1 s .. 100 h	1 CO	RE17RMMW	4183
Multifunction	12 ...240 VAC/DC	0.1 s .. 100 h	1 CO	RE17RMMWS	4505
Multifunction	24 VDC /24...240 VAC	0.1 s .. 100 h	1 CO	RE17RMXMU	4725
Multifunction	24 VDC /24...240 VAC	0.1 s .. 10 h	1 CO	RE17RMEMU	3707



RE22 Electronic Timers

Description	Supply Voltage	Time Range	Output	Reference	Unit MRP [€]
RM22 Timers					
On Delay	24 ...240 V AC/DC	0.05s...300h	1 CO	RE22R1AMR	5181
Off Delay	24 ...240 V AC/DC	0.05s...300h	1 CO	RE22R1CMR	9845
Off Delay	24 ...240 V AC/DC	0.05s...10min	1 CO	RE22R1KMR	11681
Asymmetrical flashing	24 ...240 V AC/DC	0.05s...300h	1 CO	RE22R1MLMR	8138
Multi function	24 ...240 V AC/DC	0.05s...300h	1 CO	RE22R1MYMR	7925
Start Delta	24 VDC /24...240 VAC	0.05s...300s	1 CO	RE22R1QCMU	6173
Start Delta	24 VDC /24...240 VAC	1s...100h	1 CO	RE22R1QMU	5844
On Delay	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2AMR	9947
Off Delay	24 VDC /24...240 VAC	1s...100h	2 CO	RE22R2AMU	4888
Off Delay	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2CMR	14335
Asymmetrical flashing	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2DMR	8138
Off Delay	24 ...240 V AC/DC	0.05s...10min	2 CO	RE22R2KMR	14310
Multi function	24 ...240 V AC/DC	1s...100h	2 CO	RE22R2MMU	4909
Multi function	12 ...240 VAC/DC	1s...100h	2 CO	RE22R2MMW	5608
Multi function	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2MYMR	15969
Start Delta	24 ...240 V AC/DC	0.05s...30s	2 CO	RE22R2QEMR	7495
Start Delta	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2QGMR	11220
Start Delta	24 ...240 V AC/DC	0.05s...300h	2 CO	RE22R2QTMR	7885

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025



Control - Monitoring & Control Relays

Description	Supply Voltage	Measurement Range	Time Range	Output	Reference	Unit MRP [₹]
RM10 Measurement & Control Relays						
3 Phase Multifunction	Self Powered	208...480 VAC	-	1 CO	RM10TE00	3246
3 Phase Multifunction	Self Powered	183...528 VAC	-	1 CO	RM10TG00	3024
RM17 Measurement & Control Relays (self Powered)						
3 Ø: Phase loss/ Phase sequence	Self Powered	208...480 VAC	-	1 CO	RM17TG00	15583
3 Ø: Phase loss/ Phase sequence	Self Powered	208...440 VAC	-	2 CO	RM17TG20	4165
Phase Sequence, Phase,loss,Undervoltage	Self Powered	208...480 VAC	-	1 CO	RM17TU00	8374
Phase Sequence, Phase,loss, Asymmetry	Self Powered	208...480 VAC	-	1 CO	RM17TA00	10233
Multifunction	Self Powered	208...480 VAC	-	1 CO	RM17TE00	26713
1 phase/ under or overvoltage control	Self Powered	65 to 260 VAC/DC	0.1 - 10 s	1 CO	RM17UAS15	8374
1 phase/ under or overvoltage control in window	Self Powered		0.1 - 10 s	1 CO	RM17UBE15	22020

Description	Supply Voltage	Measurement Range	Time Range	Output	Reference	Unit MRP [₹]
RM22 Measurement & Control Relays						
Phase loss/ Phase sequence	Self powered	208...480 VAC	-	2 CO	RM22TG20	6338
Multifunction	Self powered	208...480 VAC	0.1...30 s	2 CO	RM22TR33	4934
Phase Sequence, Phase,loss,Undervoltage	Self powered	208...480 VAC	-	2 CO	RM22TU23	8392
Under or overvoltage	24...240 VAC	1...100 VAC/DC	0.1...30 s	2 CO	RM22UA32MR	12815
Under or overvoltage	24...240 VAC	15...500 VAC/DC	0.1...30 s	2 CO	RM22UA33MR	11253
Under or overcurrent	24...240 VAC	4mA...1A	0.1...30 s	2 CO	RM22JA31MR	11966
Level Control	24...240 VAC	4K...100K ohm	-	1 CO	RM22LG11MR	6399
RM35 Measurement & control relays						
Multifunction	Self powered	220...480 VAC	-	2C/O	RM35TF30	On Request
Under or overvoltage P-N	Self powered	120...277 VAC	-	2C/O	RM35UB3N30	On Request
Over or undervoltage	24...240 VAC/DC	15...600 VAC/DC	-	2C/O	RM35UA13MW	On Request
Over or undercurrent	24...240 VAC/DC	0.15...15A	-	2C/O	RM35JA32MW	On Request
Liquid level control	24...240 VAC/DC	-	-	2C/O	RM35LM33MW	On Request
Under or overspeed	24...240 VAC/DC	-	-	1 C/O	RM35S0MW	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Easy Harmony Electronic Relays

The easy choice for timer and control relays

Newly
Launched

- **Cost-effective:**
Essential choice with optimized function features
- **Space saving:**
Compact size in 17.5mm form factor
- **Easy selection:**
Six references to meet most of the application needs
- **Meets international industrial standards:**
cULus, CE, CCC, and UKCA



RM10: Control relays



RE10: Timer relays



se.com/in



RM10 series

Control relays with the basic, standard or advanced monitoring function of 3 phase power network that feeds to the customer application.

Harmony 3 Phase Control Relays

Description	Range	Voltage	Output	Reference	Unit MRP [₹]
Basic: Phase sequence, phase loss	-	208...480Vac	1CO, 5A	RM10TG00N	1900
Standard: Phase sequence, phase loss, phase imbalance	0...15s	208...480Vac	1CO, 5A	RM10TA00N	2300
Advanced: Phase sequence, phase loss, phase imbalance, over voltage and under voltage	0...100s	208...480Vac	1CO, 5A	RM10TE00N	2600



RE10 series

Timer relays with single time function, to fulfill customer application needs with simple hard-wired timing control.

Harmony Timer Relays

Description	Range	Voltage	Output	Reference	Unit MRP [₹]
Single function: ON delay	0...30hrs	240VAC or 24VAC/DC	1CO, 5A	RE10RAMUN	1300
Single function: OFF delay	0...30hrs	240VAC or 24VAC/DC	1CO, 5A	RE10RCMUN	1600
Single function: Star-delta	0...120s	240 VAC	1CO, 5A	RE10RQM7N	1400

Adapted to your applications, segments and operating environments



Pumping



Fan



Motor



Generator

Material
workingMaterial
handling

MMM

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Control & Signaling Unit

Push Buttons, Switches and Pilot Lights

Pilot lights

Description	Supply Voltage	Colour	Reference	Unit MRP [₹]
With Direct Integral LED				
	~/ 12V	White	XA2EVJ1LC	224
	~/ 12V	Green	XA2EVJ3LC	200
	~/ 12V	Red	XA2EVJ4LC	200
	~/ 12V	Amber	XA2EVJ5LC	200
	~/ 12V	Blue	XA2EVJ6LC	297
	~/ 12V	Yellow	XA2EVJ8LC	200
	~/ 24V	White	XA2EVB1LC	224
	~/ 24V	Green	XA2EVB3LC	200
	~/ 24V	Red	XA2EVB4LC	200
	~/ 24V	Amber	XA2EVB5LC	200
	~/ 24V	Blue	XA2EVB6LC	297
	~/ 24V	Yellow	XA2EVB8LC	200
	~/ 30V	White	XA2EVC1LC	224
	~/ 30V	Green	XA2EVC3LC	200
	~/ 30V	Red	XA2EVC4LC	200
	~/ 30V	Amber	XA2EVC5LC	200
	~/ 30V	Blue	XA2EVC6LC	297
	~/ 30V	Yellow	XA2EVC8LC	200
	~/ 48V	White	XA2EVE1LC	224
	~/ 48V	Green	XA2EVE3LC	200
	~/ 48V	Red	XA2EVE4LC	200
	~/ 48V	Amber	XA2EVE5LC	200
	~/ 48V	Blue	XA2EVE6LC	297
	~/ 48V	Yellow	XA2EVE8LC	200
	~/ 60...63.5 V	White	XA2EVEE1LC	224
	~/ 60...63.5 V	Green	XA2EVEE3LC	200
	~/ 60...63.5 V	Red	XA2EVEE4LC	200
	~/ 60...63.5 V	Amber	XA2EVEE5LC	200
	~/ 60...63.5 V	Blue	XA2EVEE6LC	297
	~/ 60...63.5 V	Yellow	XA2EVEE8LC	200
	~/ 110 V	White	XA2EVF1LC	232
	~/ 110 V	Green	XA2EVF3LC	200
	~/ 110 V	Red	XA2EVF4LC	200
	~/ 110 V	Amber	XA2EVF5LC	200
	~/ 110 V	Blue	XA2EVF6LC	328
	~/ 110 V	Yellow	XA2EVF8LC	200
	- 220 V	White	XA2EVMD1LC	278
	- 220 V	Green	XA2EVMD3LC	269
	- 220 V	Red	XA2EVMD4LC	252
	- 220 V	Amber	XA2EVMD5LC	278
	- 220 V	Blue	XA2EVMD6LC	561
	- 220 V	Yellow	XA2EVMD8LC	252
	~ 220 ... 230 V	White	XA2EVM1LC	224
	~ 220 ... 230 V	Green	XA2EVM3LC	200
	~ 220 ... 230 V	Red	XA2EVM4LC	200
	~ 220 ... 230 V	Amber	XA2EVM5LC	200
	~ 220 ... 230 V	Blue	XA2EVM6LC	297
	~ 220 ... 230 V	Yellow	XA2EVM8LC	200
	~ 380 ... 400 V	White	XA2EVQ1LC	307
	~ 380 ... 400 V	Green	XA2EVQ3LC	307
	~ 380 ... 400 V	Red	XA2EVQ4LC	297
	~ 380 ... 400 V	Amber	XA2EVQ5LC	328
	~ 380 ... 400 V	Blue	XA2EVQ6LC	660
	~ 380 ... 400 V	Yellow	XA2EVQ8LC	297

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025

Pushbuttons

Description	Contacts	Color	Reference	Unit MRP [₹]
Pushbuttons plastic circular bezel - complete, spring return				
Flush unmarked	1 NO	White	XB5AA11N	205
Flush unmarked	1 NO	Black	XB5AA21N	197
Flush unmarked	1 NO	Green	XB5AA31N	197
Flush unmarked	1 NO	Yellow	XB5AA51N	197
Flush unmarked	1 NO	Blue	XB5AA61N	197
Flush unmarked	1 NC	Red	XB5AA42N	197
Flush unmarked	1 NO	Red	XB5AA41N	197
Projecting	1 NC	Red	XB5AL42N	238
Double headed Pushbutton	1 NO + 1 NC	Green	XB5AL845N	1388
Flush with silicon transparent boot	1 NO	Green	XB5AP31N	300

Illuminated Pushbuttons

Description	Contacts	Color	Reference	Unit MRP [₹]
Illuminated Pushbuttons plastic circular bezel - complete, Clear Lens				
Flush Integral LED 24V AC/DC	1 NO	White	XB5AW31B1N	576
Flush Integral LED 24V AC/DC	1 NO	Green	XB5AW33B1N	576
Flush Integral LED 24V AC/DC	1 NC	Red	XB5AW34B2N	576
Flush Integral LED 24V AC/DC	1 NO	Yellow	XB5AW35B1N	576
Flush Integral LED 24V AC/DC	1 NO	Amber	XB5AW38B1N	644
Flush Integral LED 24V AC/DC	1 NO	Blue	XB5AW36B1N	1061
Flush Integral LED 110V AC	1 NO	Green	XB5AW33G1N	701
Flush Integral LED 110V AC	1 NC	Red	XB5AW34G2N	701
Flush Integral LED 230V AC	1 NO	White	XB5AW31M1N	581
Flush Integral LED 230V AC	1 NO	Green	XB5AW33M1N	576
Flush Integral LED 230V AC	1 NC	Red	XB5AW34M2N	576
Flush Integral LED 230V AC	1 NO	Yellow	XB5AW35M1N	576
Flush Integral LED 230V AC	1 NO	Amber	XB5AW38M1N	644
Flush Integral LED 230V AC	1 NO	Blue	XB5AW36M1N	1061

* Clear type illuminated Push buttons are provided with striated lens.

Pilot Lights

Description	Supply Voltage V	Color	Reference	Unit MRP [₹]
With smooth lens (except clear colour)				
Direct Integral LED	24V AC/DC	White	XB7EV01BPN	310
Direct Integral LED	24V AC/DC	Green	XB7EV03BPN	288
Direct Integral LED	24V AC/DC	Red	XB7EV04BPN	288
Direct Integral LED	24V AC/DC	Yellow	XB7EV05BPN	288
Direct Integral LED	24V AC/DC	Amber	XB7EV08BPN	288
Direct Integral LED	24V AC/DC	Blue	XB7EV06BPN	591
Direct Integral LED	120V AC	White	XB7EV01GPN	345
Direct Integral LED	120V AC	Green	XB7EV03GPN	288
Direct Integral LED	120V AC	Red	XB7EV04GPN	288
Direct Integral LED	120V AC	Yellow	XB7EV05GPN	318
Direct Integral LED	120V AC	Amber	XB7EV08GPN	288
Direct Integral LED	120V AC	Blue	XB7EV06GPN	658
Direct Integral LED	230V AC	White	XB7EV01MPN	310
Direct Integral LED	230V AC	Green	XB7EV03MPN	288
Direct Integral LED	230V AC	Red	XB7EV04MPN	288
Direct Integral LED	230V AC	Yellow	XB7EV05MPN	288
Direct Integral LED	230V AC	Amber	XB7EV08MPN	288
Direct Integral LED	230V AC	Blue	XB7EV06MPN	591

* Clear type pilot lights are provided with striated lens.

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Selector Switch

Description	Type	Contacts	Color	Reference	Unit MRP [₹]
Selector Switch-Complete(Non-Illuminated)					
Stanadard Handle	2 Position stay put	1 NO	Black	XB5AD21N	485
	2 Position spring return, right to left	1 NO	Black	XB5AD41N	770
	3 Position stay put	2 NO	Black	XB5AD33N	528
	3 Position spring return to center	2 NO	Black	XB5AD53N	562
	3 Position spring return, left to center	2 NO	Black	XB5AD73N	656
	3 Position spring return, right to center	2 NO	Black	XB5AD83N	671
Long Handle	2 Position stay put	1 NO	Black	XB5AJ21N	544
	3 Position stay put	2 NO	Black	XB5AJ33N	581
	3 Spring return to center	2 NO	Black	XB5AJ53N	566
Key Switch	2 Position stay put L- Key release	1 NO	Black	XB5AG21N	740
	2 Position stay put R-L Key release	1 NO	Black	XB5AG41N	790
	2 Position spring return, right to left, L	1 NO	Black	XB5AG61N	1404
	3 Position stay put, All pos Key release	2 NO	Black	XB5AG03N	628
	3 Position stay put, Center Key release	2 NO	Black	XB5AG33N	867
	3 Position stay put, R-L Key release	2 NO	Black	XB5AG53N	878

Description	Supply Voltage	Contacts	Color	Reference	Unit MRP [₹]
Illuminated Selector Switch-Complete					
2 Position Stay put	24 VAC/ DC	1 NO	White	XB5AK121B1N	1065
	24 VAC/ DC	1 NO	Green	XB5AK123B1N	831
	24 VAC/ DC	1 NC	Red	XB5AK124B2N	831
	24 VAC/ DC	1 NO	Yellow	XB5AK125B1N	831
2 Position Spring Return	24 VAC/ DC	1 NO	Green	XB5AK143B1N	1618
2 Position Stay put	230V AC	1 NO	White	XB5AK121M1N	1065
	230V AC	1 NO	Green	XB5AK123M1N	831
	230V AC	1 NC	Red	XB5AK124M2N	831
	230V AC	1 NO	Yellow	XB5AK125M1N	922
3 Position Stay put	24 VAC/ DC	2 NO	Green	XB5AK133B3N	868
	24 VAC/ DC	1 NO+1 NC	Red	XB5AK134B5N	966
3 Position Spring Return	24 VAC/ DC	2 NO	White	XB5AK151B3N	1051
	24 VAC/ DC	2 NO	Green	XB5AK153B3N	869
	24 VAC/ DC	2 NO	Yellow	XB5AK155B3N	1410
3 Position Stay put	230 VAC	2 NO	Green	XB5AK133M3N	868
	230 VAC	1 NO+1 NC	Red	XB5AK134M5N	966
	230 VAC	2 NO	Yellow	XB5AK135M3N	1014
3 Position Spring Return	230 VAC	2 NO	White	XB5AK151M3N	945
	230 VAC	2 NO	Green	XB5AK153M3N	869
	230 VAC	2 NO	Yellow	XB5AK155M3N	1410

Mushhead Pushbutton

Description	Dia of Head	Type of Contact	Colour	Reference	Unit MRP [₹]
Mushroom Head Pushbuttons					
Spring return	40	1 NO	Black	XB5AC21N	384
	40	1 NO	Green	XB5AC31N	381
	40	1 NC	Red	XB5AC42N	381
	60	1 NO	Green	XB5AR31N	529
Emergency Switching Off Mushroom Head push button					
Turn to release	30	1 NC	Red	XB5AS442N	373
Turn to release	40	1 NC	Red	XB5AS542N	373
Key release (n°155)	40	1 NC	Red	XB5AS142N	681
Trigger action Turn to release	40	1 NO+ 1 NC	Red	XB5AS8445N	878
Trigger action key to release	40	1 NO+ 1 NC	Red	XB5AS9445N	868

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025

Illuminated Pushbutton with yellow LED

Description	Supply Voltage	Type of Contact	Color	Reference	Unit MRP [₹]
Double Headed Pushbuttons (Spring return)					
1 flush push (marked "I") 1 pilot light 1 projecting push (marked "O")	24V AC/DC	NO+NC	Green+Red	XB5AW84B5N	1377
	230V AC	NO+NC	Green+Red	XB5AW84M5N	1377
Illuminated Emergency Switching Off Pushbutton (Mushroom head)					
Turn to release	24V AC/DC	NC	Red	XB5AW74B2N	1186
	230V AC	NC	Red	XB5AW74M2N	1260

Accessories

Description	Marking on Yellow background	Color	Reference	Unit MRP [₹]
Double Headed Pushbuttons (Spring return)				
Circular Legends for Emergency stop function	Emergency Stop	Yellow	ZBY9330N	145

Description	Contact Type	Reference	Unit MRP [₹]
Contact blocks with screw clamp terminal connections			
Single contact block	1 NO	ZBE101N	115
Single contact block	1 NC	ZBE102N	115

Description	Reference	Unit MRP [₹]
Contact blocks with screw clamp terminal connections		
Boot for cylindrical flush PB	ZBPAN	78

Biometric Switches

Description	Reference	Unit MRP [₹]
Bistable biometric switch, 24 V DC - PNP - by 2m cable	XB5S1B2L2	43980
Bistable biometric switch, 24 V DC - PNP - by M12 connector	XB5S1B2M12	46400
Monostable biometric switch, 24 V DC - PNP - by 2m cable	XB5S2B2L2	44557
Monostable biometric switch, 24 V DC - PNP - by M12 connector	XB5S2B2M12	46257



Easy Harmony XB2

Just enough robust switch with added strength

Reliable, flexible and just enough



Easy Harmony XB2 Ø 22 mm metal modular push buttons and switches, are the basic products perfectly suited to meet majority of installation requirements, with metal features for added strength.

Designed for robust applications without compromising on ease of use, safety, flexibility and availability. Providing just enough and a little more.

Target Segments

Consumer packaging, material working, textile machine, printing, hoisting, process control, lift and elevator.

Ø 22 mm metal modular push buttons and switches

Fit for purpose

- Designed to be used in numerous control and signaling applications
- Easy selection of the key functions for standard applications
- Diameter Ø 22 mm for standard OEM and panel-builder applications

Robustness

- Metal bezels with metal fixing collars for impact endurance
- Excellent resistance to mechanical shocks and vibrations
- Metal screws for secure fix and grounding contact to the panel
- Conforming to CE, CCC and RoHS
- Tested and certified performance
- IP65
- Supports an operating temperature range from -25°C to +70°C

Easiness

- Simple installation with screwdriver
- Flexibility with sub-assemblies for easy mix and match of functionalities
- Simple modular design facilitates post installation servicing, modification and adaptation of machines by non-specialists
- Anti-loosening system for screw clamp terminals of contact blocks

Availability

- Supported by the service of Schneider Electric, a worldwide leader in automation and control
- Wide availability via an extensive distribution network

Type of functions	Contact functions				Contact and signaling functions	Signaling functions
Type of products	Pushbuttons	Emergency switching off and emergency stop pushbuttons	Selector and key switches	Special functions	Illuminated pushbuttons	Pilot lights
						
Description of range	Pushbuttons, spring return: flush push, mushroom head, projecting or booted	Emergency switching off and stop pushbuttons: turn to release and push-pull	Selector switches, 2- or 3-position standard or long handle or key switches	Joystick and buzzer	Illuminated pushbuttons with integral LED, spring return: flush push or projecting	Pilot lights with integral LED
Type references	XB2BA..C/ BC..C/ BL..C/ BP..C/BR..C (Complete) ZB2BA.C/ BC.C/BL.C/ BPC/ BR.C (Head)	XB2BS...C/ BT..C (Complete) ZB2BS..C/ BTC (Head)	XB2BD..C/ BJ..C/ BG..C (Complete) ZB2BD.C/ BJ.C/ BG.C (Head)	XD2PA.. CR (Joystick) XB2BS...C (Buzzer)	XB2BW3..1C (Complete) ZB2BW..C (Head)	XA2EV..LC

Please contact Customer Care Center for Stockable and Non stockable status of references.

 NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Push Button Complete unit

Description	Contacts	Color	Reference	Unit MRP [₹]
Spring Return type				
Flush unmarked	1 NO	White	XB2BA11C	204
Flush unmarked	1 NO	Black	XB2BA21C	204
Flush unmarked	1 NO	Green	XB2BA31C	204
Flush unmarked	1 NC	Red	XB2BA42C	204
Flush unmarked	1 NO	Yellow	XB2BA51C	204
Flush unmarked	1 NO	Blue	XB2BA61C	204
With Marking "I"	1 NO	Green	XB2BA3311C	258
With Marking	1 NO	Black	XB2BA3351C	258
With Marking	1 NO	white	XB2BA3341C	258
With Marking "O"	1 NC	Red	XB2BA4322C	258
Spring Return type with Projecting push				
	1 NO	Green	XB2BL31C	214
	1 NC	Red	XB2BL42C	214
Spring Return , Booted Pushbutton				
	1 NO	Black	XB2BP21C	296
	1 NO	Green	XB2BP31C	296
	1 NC	Red	XB2BP42C	296
Spring Return , Mushroom Head Pushbutton				
40 mm	1 NO	Black	XB2BC21C	263
40 mm	1 NO	Green	XB2BC31C	263
40 mm	1 NO	Yellow	XB2BC51C	263
40 mm	1 NC	Red	XB2BC42C	263
60 mm	1 NO	Black	XB2BR21C	330

Emergency Switching Off PushButton

Description	Contacts	Color	Reference	Unit MRP [₹]
Mushroom Push button Head				
40 mm Push Pull	1 NC	Red	XB2BT42EC	330
30 mm Turn to release	1 NC	Red	XB2BS442C	330
40 mm Turn to release	1 NC	Red	XB2BS542C	330
60 mm Turn to release	1 NC	Red	XB2BS642C	409

Emergency Stop Pushbutton

Description	Contacts	Color	Reference	Unit MRP [₹]
Mushroom Push button Head (complaint with IEC60947-5-5)				
40 mm Push Pull	1 NC	Red	XB2BT842C	755
40 mm Turn to Release	1 NC	Red	XB2BS8442C	442

Description	Contacts	Color	Reference	Unit MRP [₹]
Spring Return Illuminated Pushbutton				
24 V AC/DC with integral LED	1 NO	White	XB2BW31B1C	742
	1 NO	Green	XB2BW33B1C	472
	1 NO	Red	XB2BW34B1C	472
	1 NO	Orange	XB2BW35B1C	472
	1 NO	Blue	XB2BW36B1C	765
220-230 V AC with integral LED	1 NO	White	XB2BW31M1C	742
	1 NO	Green	XB2BW33M1C	472
	1 NO	Red	XB2BW34M1C	472
	1 NO	Yellow	XB2BW35M1C	472
	1 NO	Blue	XB2BW36M1C	765

Selector Switch

Description	Contacts	Color	Reference	Unit MRP [₹]
Spring Return type				
2 Position stay put	1 NO	Black	XB2BD21C	388
2 Position stay put	1 NO + 1 NC	Black	XB2BD25C	516
2 Position spring return, right to left	1 NO	Black	XB2BD41C	388
2 Position spring return, right to left	1 NO + 1 NC	Black	XB2BD45C	516
3 Position stay put	2 NO	Black	XB2BD33C	477
3 Position spring return to center	2 NO	Black	XB2BD53C	503
3 Position spring return, left to center	2 NO	Black	XB2BD73C	503

With Long Handle

2 Position stay put	1 NO	Black	XB2BJ21C	388
2 Position stay put	1 NO + 1 NC	Black	XB2BJ25C	516
3 Position Stay put	2 NO	Black	XB2BJ33C	477
3 position Spring return from 2 side	2 NO	Black	XB2BJ53C	503

With Key Switch

2 Position stay put, 1 side pull out	1 NO	Black	XB2BG21C	502
2 Position stay put, 2 side pull out	1 NO	Black	XB2BG41C	502
2 Position spring return, Right to left , 1 side pull out	1 NO	Black	XB2BG61C	502
3 Position stay put, middle pull out	2 NO	Black	XB2BG33C	616
3 Position stay out , 2 side pull out	2 NO	Black	XB2BG53C	616
3 Position stay out , 3 side pull out	2 NO	Black	XB2BG03C	616

Body Assemblies

Description	Contact type	Reference	Unit MRP [₹]
Body assemblies with contact block			
	1 NO	ZB2BZ101C	121
	1 NC	ZB2BZ101C	121
	2 NO	ZB2BZ103C	240
	2 NC	ZB2BZ104C	240
	1 NO + 1 NC	ZB2BZ105C	240
Contact block			
	1 NO	ZB2BE101C	107
	1 NC	ZB2BE102C	107

B buzzers from XB2 Series

Description	Reference	Unit MRP [₹]
Red illuminated buzzer DC/AC24V	XB2BSB4LC	668
Red illuminated buzzer AC220V	XB2BSM4LC	668
Buzzer 24V AC/DC	XB2BSBC	627
Buzzer 220V AC	XB2BSMC	627

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025

Universal Light Blocks for LED Pilot light

Descriptions	Supply Voltage	Colour	Reference	Unit MRP [₹]
For XAL Metal Enclosures	24V AC/DC	White	ZALVB1	816
For XAL Metal Enclosures	220V AC	White	ZALVM1	2511
For XB5/XB4 references without end with "N"	24V AC/DC	White	ZBVB1	680
For XB5/XB4 references without end with "N"	120V AC	White	ZBVG1	1517
For XB5/XB4 references without end with "N"	220V AC	White	ZBVM1	1553

XAL - Empty enclosures for XB5 and XB4 Push button and Pilot light

Description	No of Cut out	Color of Enclosure	Reference	Unit MRP [₹]
For normal environment Light grey base IP65	1	Dark grey	XALD01	820
For normal environment Light grey base IP65	2	Dark grey	XALD02	1016
For normal environment Light grey base IP65	3	Dark grey	XALD03	1260
For normal environment Light grey base IP65	4	Dark grey	XALD04	1723
For normal environment Light grey base IP65	5	Dark grey	XALD05	2250
For normal environment Light grey base IP65	1	Yellow	XALK01	942
For normal environment Light Grey base IP54	2	Light Grey	XALE2	675
For normal environment Light Grey base IP54	3	Light Grey	XALE3	824

XALB – Plastic Empty enclosures for use with XB2 (ZB2*)

Description	No of Cut out	Color of Enclosure	Reference	Unit MRP [₹]
50 mm depth , 22 mm Opening , Grey cover	1	Dark Grey base	XALB015C	On Request
70 mm depth , 22 mm Opening , Grey cover	1	Dark Grey base	XALB017C	On Request
50 mm depth , 22 mm Opening , Grey cover	2	Dark Grey base	XALB025C	On Request
70 mm depth , 22 mm Opening , Grey cover	2	Dark Grey base	XALB027C	On Request
50 mm depth , 22 mm Opening , Grey cover	3	Dark Grey base	XALB035C	On Request
70 mm depth , 22 mm Opening , Grey cover	3	Dark Grey base	XALB037C	On Request
50 mm depth , 22 mm Opening , Yellow cover (for Emergency Stop)	1	Dark Grey base	XALB015YC	On Request
70 mm depth , 22 mm Opening , Yellow cover (for Emergency Stop)	1	Dark Grey base	XALB017YC	On Request

ZEN - Contact block for mounting on Metal plate at back of enclosure

Description	Contacts Type and Composition	Reference	Unit MRP [₹]
Standard single	1 NO	ZENL1111 	440
Contact block	1 NC	ZENL1121 	440

Please contact Customer Care Center for Stockable and Non stockable status of references.

 NORMAL STOCK ITEMSW.E.F. July 15th, 2025

Transition to equipment signaling excellence, elevate your operations

Harmony XVB7 Modular Tower Light

Coming
Soon



Better and brighter: Light up your journey with Harmony Modular Tower Lights

Coming
Soon

Harmony Modular Tower Lights, XVB7, feature a sleek, new design incorporating universal LEDs to maximize brightness while minimizing energy consumption.

With easy installation and a modular concept, Harmony Modular Tower Lights simplify your selection journey and enable operational efficiency.



Better and brighter

- Elevated modern design
- 4x improvement in brightness



Flexible

- Modular concept provides selection flexibility
- IO-Link and USB connections enable more operation capability



Efficient

- More rationalized construction, reduce 3x SKUs with the same functional coverage
- Push-in terminal reduces wiring time by up to 75%
- M12 connection reduces wiring time by up to 95%



Sustainability focused

- Power optimization via energyefficient LED
- Sustainable lifecycle from material to manufacturing

Precision, sustainability, and safety are important for maintaining peak productivity levels, particularly in environments where high performance and safety are critical.



Safety you can see

Bright light = clear signals



**Modular tower lights Ø 70 mm for customer assembly
with light and sound functions**

Description	Light Source	Color	Reference	Unit MRP [₹]
Light modules with steady light signal (IP66)				
Light modules with energy-efficient LED	LED, included 24 V AC/DC	Green	XVB7C23	On Request
	LED, included 24 V AC/DC	Red	XVB7C24	On Request
	LED, included 24 V AC/DC	Orange	XVB7C25	On Request
	LED, included 24 V AC/DC	Blue	XVB7C26	On Request
	LED, included 24 V AC/DC	White	XVB7C27	On Request
	LED, included 24 V AC/DC	Yellow	XVB7C28	On Request
Light modules with Blinking light signal (IP66)				
Light modules with energy-efficient LED	LED, included 24 V AC/DC	Green	XVB7C53	On Request
	LED, included 24 V AC/DC	Red	XVB7C54	On Request
	LED, included 24 V AC/DC	Orange	XVB7C55	On Request
	LED, included 24 V AC/DC	Blue	XVB7C56	On Request
	LED, included 24 V AC/DC	White	XVB7C57	On Request
	LED, included 24 V AC/DC	Yellow	XVB7C58	-
Light modules with Flashing light signal (IP66)				
Light modules with energy-efficient LED	LED, included 24 V AC/DC 2 Joules flash	Green	XVB7C63	On Request
	LED, included 24 V AC/DC 2 Joules flash	Red	XVB7C64	On Request
	LED, included 24 V AC/DC 2 Joules flash	Orange	XVB7C67	On Request
	LED, included 24 V AC/DC 2 Joules flash	Blue	XVB7C66	On Request
	LED, included 24 V AC/DC 2 Joules flash	White	XVB7C67	On Request
	LED, included 24 V AC/DC 2 Joules flash	Yellow	XVB7C68	On Request
Beacon lens with steady light signal (IP66)				
Light modules with energy-efficient LED	LED, included 24 V AC/DC	Green	XVB7L23	On Request
	LED, included 24 V AC/DC	Red	XVB7L24	On Request
	LED, included 24 V AC/DC	Orange	XVB7L25	On Request
	LED, included 24 V AC/DC	Blue	XVB7L26	On Request
	LED, included 24 V AC/DC	White	XVB7L27	On Request
	LED, included 24 V AC/DC	Yellow	XVB7L28	On Request
Beacon lens with flashing light signal (IP66)				
Light modules with energy-efficient LED	LED, included 24 V AC/DC 2 Joules flash	Green	XVB7L63	On Request
	LED, included 24 V AC/DC 2 Joules flash	Red	XVB7L64	On Request
	LED, included 24 V AC/DC 2 Joules flash	Orange	XVB7L65	On Request
	LED, included 24 V AC/DC 2 Joules flash	Blue	XVB7L66	On Request
	LED, included 24 V AC/DC 2 Joules flash	White	XVB7L67	On Request
	LED, included 24 V AC/DC 2 Joules flash	Yellow	XVB7L68	On Request

Description	Voltage	Connection	Color	Reference	Unit MRP [₹]
Base modules for direct fixing (IP66) or tube fixing (IP65)					
Standard base modules with tube and cover	24 V AC/DC	Push in terminal	Dark Grey	XVB7C21B	On Request
	24 V AC/DC	M12 connector (A-coded, 15 cm cable)	Dark Grey	XVB7C61	On Request
	24 V AC/DC	IO-Link protocol (V1.1) M12 connector (A-coded, 15 cm cable)	Dark Grey	XVB7C31	On Request
	100..240 V AC 120 V AC/DC	Push in terminal	Dark Grey	XVB7C21M	On Request

Description	Voltage	Color	Reference	Unit MRP [₹]
Rotating and multi-functional modules (IP66)				
Multi-functional module adjustable via dip switch: 8 colors, 4 light patterns Steady, blinking, 2 x flash, 3 x flash	LED, included 24 V AC/DC	Clear Lens 8 Colors (blue, green, Orange, Red, White yellow, turquoise and violet)	XVB7CM9	On Request

Description	Voltage	Sound Pattern	Reference	Unit MRP [₹]
Audible Module				
Sounder 360° omni sound, IP66 Up to 102 dB (A) at 1 meter Dark Grey	24 V AC/DC	2 tones buzzer (continuous or intermittent)	XVB7C9S	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



- Motor less + LED Flashing
- External Buzzer volume adjustor 70 DB to 90 DB
- Straight & Side wiring- more flexible

XVR3 Multifunctional LED Beacon NEW

Description	Reference	Unit MRP [₹]
Multi-functional LED Beacon green without buzzer DC/AC 12~24V	XVR3B03	16086
Multi-functional LED Beacon red without buzzer DC/AC 12~24V	XVR3B04	16113
Multi-functional LED Beacon orange without buzzer DC/AC 12~24V	XVR3B05	15840
Multi-functional LED Beacon green without buzzer AC 100~230V	XVR3M03	15789
Multi-functional LED Beacon red without buzzer AC 100~230V	XVR3M04	15549
Multi-functional LED Beacon Orange without buzzer AC 100~230V	XVR3M05	15840
Multi-functional LED Beacon red with buzzer DC/AC 12~24V	XVR3B04S	31703
Multi-functional LED Beacon orange with buzzer DC/AC 12~24V	XVR3B05S	32636
Multi-functional LED Beacon green with buzzer AC 100~230V	XVR3M03S	17518
Multi-functional LED Beacon red with buzzer AC 100~230V	XVR3M04S	14536
Multi-functional LED Beacon orange with buzzer AC 100~230V	XVR3M05S	15604
Multi-functional LED Beacon blue with buzzer AC 100~230V	XVR3M06S	17193

XVS Sirens

Description	Reference	Unit MRP [₹]
2 tones siren - 106 dB - 12...24V AC/DC - white	XVS10BMW	29208
2 tones siren - 106 dB - 120V AC - white	XVS10GMW	29208
2 tones siren - 106 dB - 230V AC - white	XVS10MMW	29208

DL1 Incandescent Bulb

Description	Reference	Unit MRP [₹]
Clear incandescent bulb for Signaling - ba 15d - 24 v 4 w	DL1BEBS	399
Clear incandescent bulb for Signaling - ba 15d - 120 v 7 w	DL1BEG	422
Clear incandescent bulb for Signaling - ba 15d - 230 v 5 w	DL1BEMS	433

XVR Rotating Mirror Beacon

Description	Light Block Colour	Reference	Unit MRP [₹]
Rotating mirror beacon w/o buzzer XVR - Ø 130 - 24 V AC DC	Red	XVR13B04L	17646
Rotating mirror beacon w/o buzzer XVR - Ø 130 - 24 V AC DC	Orange	XVR13B05L	16822
Rotating mirror beacon w/o buzzer XVR - Ø 120 - 24 V AC DC	Blue	XVR12B06	22832
Rotating mirror beacon w/o buzzer XVR - Ø 130 - 120 V AC	Red	XVR13G04L	20852
Rotating mirror beacon w/o buzzer XVR - Ø 130 - 230 V AC	Red	XVR13M04L	22194
Rotating mirror beacon w/o buzzer XVR - Ø 130 - 230 V AC	Orange	XVR13M05L	20664

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Tower light vivid in all kinds of ambient

Easy Harmony XVG Monolithic tower light

When Simple is just enough without compromise in quality.

Intuitive clear lens design suitable in bright environment and long distance view

Clear lens design overcome colored lens dull and reflection in bright environment.

From far, can easily differentiate machine status by ON/OFF condition of tower light, even in bright and densed environment.

Pre-wired and pre-assembled simplify selection, engineering and inventory management

Easy colored code wire with respect to function ease installation and maintenance work.

Simple yet complete signaling applications

From single layer up to 4 layers. From steady to flashing light pattern. 5 types of mounting option. Wide voltage ranges options from 24V AC/DC, 220~240V AC. Answer most of the signaling applications.



Offer overview

- Single layer to 4 layers. IP23 to IP53 depends on different mounting.
- Buzzer pressure level max 85dB @1m
- 5 type of mounting options
- Red flashing @ 1Hz on single layer, up to 4 colors (R/O/G/B) in steady pattern
- Long lasting LEDs, can operating more than 100K hours, low power consumption
- CE, CCC and EAC certification approval

Voltage	Colors	Light Pattern	Mounting Type	Without Buzzer	Buzzer
24V DC/AC	Red	Steady	100mm pole with L bracket 100mm pole with foldable bracket	XVGB1A XVGB1MA	XVGB1SA XVGB1SMA
		Flashing	100mm pole with L bracket 100mm pole with foldable bracket		XVGB1SFA XVGB1SMFA
220~240V AC		Steady	100mm pole with L bracket 100mm pole with foldable bracket	XVGM1A XVGM1MA	XVGM1SA XVGM1SMA
		Flashing	100mm pole with L bracket 100mm pole with foldable bracket		XVGM1SFA XVGM1SMFA



Voltage	Colors	Light Pattern	Mounting Type	Without Buzzer	Buzzer
24 V DC/AC	2 layers: Red/Green 3 layers: Red/Orange/Green 4 layers: Red/Orange/Green/Blue	Steady	Base Mount Direct Alu tube Alu tube and L-bracket Alu tube and fixing plate Alu tube and foldable bracket	XVGB*W XVGB*T XVGB* XVGB*H XVGB*M	XVGB*SW XVGB*ST XVGB*S XVGB*SH XVGB*SM
220~240V AC	2 layers: Red/Green 3 layers: Red/Orange/Green	Steady	Base Mount Direct Alu tube Alu tube and L-bracket Alu tube and fixing plate Alu tube and foldable bracket	XVGM+W XVGM+T XVGM+ XVGM+H XVGM+M	XVGM+SW XVGM+ST XVGM+S XVGM+SH XVGM+SM



ø Replace * with 2 to 4 represent 2 to 4 layers for DC models
ø Replace + with 2 to 3 represent 2 to 3 layers for AC models



Tower light, Ø 60 mm, Pre-assembled, PreCabled, Monoethic, Economical Version,
XVGB-Series with LED for steady light - 24VDC

Description	References	Unit MRP [₹]
With aluminium tube mounting and L-bracket		
Without Buzzer		
2-Stage Red, Green	XVGB2	3866
3-Stage Red, Amber, Green	XVGB3	4379
4-Stage Red, Amber, Green, Blue	XVGB4	5625
With Buzzer		
2-Stage Red, Green	XVGB2S	4389
3-Stage Red, Amber, Green	XVGB3S	4978
4-Stage Red, Amber, Green, Blue	XVGB4S	5301
With direct aluminium tube mounting		
Without Buzzer		
2-Stage Red, Green	XVGB2T	3983
3-Stage Red, Amber, Green	XVGB3T	4842
With Buzzer		
3-Stage Red, Amber, Green	XVGB3ST	5013
Without Buzzer		
2-Stage Red, Green	XVGB2H	3866
3-Stage Red, Amber, Green	XVGB3H	4425
4-Stage Red, Amber, Green, Blue	XVGB4H	5803
With Buzzer		
2-Stage Red, Green	XVGB2SH	4726
3-Stage Red, Amber, Green	XVGB3SH	5094
4-Stage Red, Amber, Green, Blue	XVGB4SH	6348
With aluminium tube mounting and foldable bracket		
Without Buzzer		
2-Stage Red, Green	XVGB2M	4431
3-Stage Red, Amber, Green	XVGB3M	4844
With Buzzer		
2-Stage Red, Green	XVGB2SM	4805
3-Stage Red, Amber, Green	XVGB3SM	5261
4-Stage Red, Amber, Green, Blue	XVGB4SM	5305
With base mounting - Direct		
Without Buzzer		
2-Stage Red, Green	XVGB2W	3633
3-Stage Red, Amber, Green	XVGB3W	4274
With Buzzer		
2-Stage Red, Green	XVGB2SW	4252
3-Stage Red, Amber, Green	XVGB3SW	4808
4-Stage Red, Amber, Green, Blue	XVGB4SW	5745
XVG-USB Based Towerlights		
Pre-assembled and pre-cabled Multicolor USB tower light 60mm IP42 Direct base mounting	XVGU3SWV	10066
Pre-assembled and pre-cabled Multicolor USB tower light 60mm IP42 With 100 mm aluminium tube mounting	XVGU3SHAV	11635

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Tower light, Ø 60 mm, Pre-assembled , PreCabled , Monolithic , Economical Version , XVGM-Series with LED for steady light - 220..240 VAC

Description	References	Unit MRP [€]
With aluminium tube mounting and L-bracket		
Without Buzzer		
2-Stage Red, Green	XVGM2	4165
3-Stage Red, Amber, Green	XVGM3	4713
With Buzzer		
2-Stage Red, Green	XVGM2S	4728
3-Stage Red, Amber, Green	XVGM3S	5363
With direct aluminium tube mounting		
Without Buzzer		
2-Stage Red, Green	XVGM2T	4292
With Buzzer		
2-Stage Red, Green	XVGM2ST	5260
3-Stage Red, Amber, Green	XVGM3ST	5401
With aluminium tube mounting and fixing plate		
Without Buzzer		
2-Stage Red, Green	XVGM2H	4165
3-Stage Red, Amber, Green	XVGM3H	4764
With Buzzer		
2-Stage Red, Green	XVGM2SH	5095
3-Stage Red, Amber, Green	XVGM3SH	5490
With aluminium tube mounting and foldable bracket		
Without Buzzer		
2-Stage Red, Green	XVGM2M	4776
3-Stage Red, Amber, Green	XVGM3M	5223
With Buzzer		
2-Stage Red, Green	XVGM2SM	5171
3-Stage Red, Amber, Green	XVGM3SM	5668
With Buzzer LED Flashing light		
1-Stage Red	XVGM1SMFA	4764
With base mounting - Direct		
Without Buzzer		
2-Stage Red, Green	XVGM2W	3851
3-Stage Red, Amber, Green	XVGM3W	4586
With Buzzer		
3-Stage Red, Amber, Green	XVGM3SW	5184

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Harmony eXLhoist Wireless Remote Control System

Description	References	Unit MRP [₹]
Remote Control Device (6 motion Pushbutton+1 Aux, pushbutton)	ZART8LS	On Request
Receiver with 10 Relay +2 Safety relay : 48...240 V AC	ZARB10WS	On Request
Receiver with 10 Relay +2 Safety relay : 48...240 V AC (Prewired with 1.5 m cable)	ZARB10WSP	On Request



Harmony Pocket Remote Wireless Remote Control System

Transmitter

Description	References	Unit MRP [₹]
3 Single Step Push Buttons	ZART03	On Request
4 Single Step Push Buttons	ZART04	On Request
6 Single Step Push Buttons	ZART06	On Request
8 Single Step Push Buttons	ZART08	On Request
10 Single Step Push Buttons	ZART10	On Request

Receivert

Description	References	Unit MRP [₹]
5 relays small size receiver pre-wired with 1.5 m of cable	ZARB05WSP	On Request
11 relays small size receiver pre-wired with 1.5 m of cable	ZARB11WSP	On Request

Accessories

Description	References	Unit MRP [₹]
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. for use with ZART03	ZARC603	On Request
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. for use with ZART04	ZARC604	On Request
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. for use with ZART06	ZARC606	On Request
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. for use with ZART08	ZARC608	On Request
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. for use with ZART10	ZARC610	On Request
DIY adhesive label kit for remote transmitter, 66 x 114 mm/2.60 x 4.49 in. fort use with ZART03, ZART04, ZART06, ZART08, ZART10	ZARC620	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



- Highly robust pendant control stations
- Conformity with the safety requirements of IEC standards
- 1 or 2 speed up, down, right, and left movements; emergency stop option available
- CE marking , UL/CSA certification
- Complete products IP65
- Double insulated polypropylene casing
- Screw clamp connection

Control station composition	Mechanical interlocking	Contact composition	Reference	Unit MRP [₹]
For Single Hoist Motors				
2 pushbuttons	With mechanical interlocking	1 NO	XACA201	6234
	With mechanical interlocking	1 NC + 1 NO	XACA205	6571
2 bootied pushbuttons	With mechanical interlocking	1 NO	XACA211	6295
	With mechanical interlocking	1 NC + 1 NO	XACA215	7173
For Single-Speed Motors				
2 pushbuttons	With mechanical interlocking	1 NO	XACA271	6393
	With mechanical interlocking	1 NC + 1 NO	XACA281	7197
4 pushbuttons	With mechanical interlocking Between pairs	1 NO	XACA471	8150
	With mechanical interlocking Between pairs	1 NC + 1 NO	XACA481	9254
6 pushbuttons	With mechanical interlocking Between pairs	1 NO	XACA671	9526
	With mechanical interlocking Between pairs	1 NC + 1 NO	XACA681	11761
8 pushbuttons	With mechanical interlocking Between pairs	1 NO (for 7 operators) 1 NO (for 8 operators)	XACA871	11158
	With mechanical interlocking Between pairs		XACA881	13956

Joystick Controllers

Description	Legend plate without text	Legend plate Price	Reference	Unit MRP [₹]
XD2-P (One Step in Each Position) Dia. 22mm				
2-Direction Stay-Put	ZD2-GY2201	103	XD2PA12	7105
2-Direction Spring Return to Zero	ZD2-GY2201	103	XD2PA22	6578
4-Direction Stay-Put	ZD2-GY4201	123	XD2PA14	8127
4-Direction Spring Return to Zero	ZD2-GY4201	123	XD2PA24	8256
XD2-G (Two steps in each position) Dia. 22mm				
2 - Direction (2 notches with spring return to zero)	ZD2-GY5201	139	XD2GA8241	15774
4-Direction spring (2 notches with spring return to zero)	ZD2-GY6201	146	XD2GA8441	20809

Foot Switch

Contacts Type and Composition	Reference	Unit MRP [₹]
Insulated Enclosure 1 NC + 1 NO	XPEA110	6444

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



Upgrade to Harmony XAPD/K for a modern and optimal design

Better integration in machines and modern aesthetic

New XAPD color follows the industrial standard for enclosures and machines (RAL7035).

Allow any type of XB4/XB5 functions, including E-stops with legend plate

Increase legend holders usage (our 2 sizes can be used in both vertical and horizontal direction). Our new flush XB4F/XB5F are also compatible. No change on external dimensions.

Easy to select range with rationalized number of references

Substitution table available on this document.




Discontinued

Available



XAPD*6* + ZB4FBZ014



1. Optimized features and performances



XAPM* = Pg
XAPM*H29 = ISO metric



XAPD* = ISO metric




XAPG = Pg & 3/4 NPT




XAPG* = 3/4 NPT



2. Compatible with our complete offer of products and accessories



3. Friendly customization with configurable legend panels

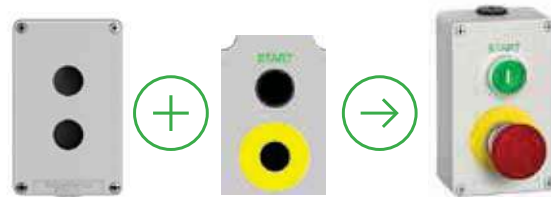

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Substitution table

Existing references	Substitution
XAPJ11 XAPJ11H29	XAPK11
XAPJ1201 XAPJ1201H29	XAPK1201
XAPJ14 XAPJ14H29	XAPK14
XAPJ1501 XAPJ1501H29	XAPK1501
XAPM11 XAPM11H29	XAPD11
XAPM1201 XAPM1201H2 XAPM1201H29 XAPM1201H6 XAPM1201H7	XAPD1201
XAPM1202 XAPM1202H2 XAPM1202H29	XAPD1202
XAPM14 XAPM14H2 XAPM14H29	XAPD14
XAPM1501 XAPM1501H2 XAPM1501H29	XAPD1501
XAPM1502 XAPM1502H2 XAPM1502H29	XAPD1502
XAPM1601 XAPM1601H2 XAPM1601H29	XAPD1601
XAPM21 XAPM21H29	XAPD21
XAPM2202 XAPM2202H2 XAPM2202H29	XAPD2202
XAPM2203 XAPM2203H2 XAPM2203H29	XAPD2203
XAPM2204 XAPM2204H2 XAPM2204H29	XAPD2204

Existing references	Substitution
XAPM24 XAPM24H29	XAPD24
XAPM2502 XAPM2502H2 XAPM2502H29	XAPD2502
XAPM2503 XAPM2503H2 XAPM2503H29	XAPD2503
XAPM2504 XAPM2504H29	XAPD2504
XAPM2602 XAPM2602H2 XAPM2602H29	XAPD2602
XAPM31 XAPM31H29	XAPD31
XAPM3203 XAPM3203H2 XAPM3203H29 XAPM3203H6	XAPD3203
XAPM3204 XAPM3204H2 XAPM3204H29 XAPM3204H6	XAPD3204
XAPM3206 XAPM3206H2 XAPM3206H29	XAPD3206
XAPM34 XAPM34H2 XAPM34H29	XAPD34
XAPM3503 XAPM3503H2 XAPM3503H29	XAPD3503
XAPM3504 XAPM3504H2 XAPM3504H29	XAPD3504
XAPM3506 XAPM3506H2 XAPM3506H29	XAPD3506
XAPM3603 XAPM3603H2 XAPM3603H29	XAPD3603

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Substitution table

Existing references	Substitution
XAPM44 XAPM44H2 XAPM44H29	XAPD44
XAPM4504 XAPM4504H2	XAPD4504
XAPM4505	XAPD4505
XAPM4506 XAPM4506H2 XAPM4506H29	XAPD4506
XAPM4508 XAPM4508H2 XAPM4508H29	XAPD4508
XAPM4604 XAPM4604H2 XAPM4604H29	XAPD4604
XAPM54 XAPM54H29	XAPD54
XAPM5508 XAPM5508H29	XAPD5508
XAPM5512	XAPD5510
XAPM5512H29	XAPD5512
XAPM5606 XAPM5606H29	XAPD5606
XAPH1201 XAPH1201H29	XAPK1201
XAPH1501	XAPK1501
XAPH1601	XAPK1601

Existing references	Substitution
XAPG11	XAPD11
XAPG1201	XAPD1201
XAPG1202	XAPD1202
XAPG14	XAPD14
XAPG1501	XAPD1501
XAPG1502	XAPD1502
XAPG1601	XAPD1601
XAPG2202	XAPD2202
XAPG2203	XAPD2203
XAPG24	XAPD24
XAPG2502	XAPD2502
XAPG2504	XAPD2504
XAPG31	XAPD31
XAPG3203	XAPD3203
XAPG34	XAPD34
XAPG3503	XAPD3503
XAPG3504	XAPD3504
XAPG3506	XAPD3506
XAPG3603	XAPD3603
XAPG3802	XAPD2602
XAPG44	XAPD44
XAPG4506	XAPD4506
XAPG4508	XAPD4508
XAPG4604	XAPD4604

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

XAP Metal

Description	Dimension wxhxd (mm)	Cable Gland type ISO standard	Number of Cut outs	Number of rows		Reference	Unit MRP [₹]
				Vertical	Horizontal		
Die-cast metal enclosures XAPD (grey “RAL 7035” lid and base)							
Zinc Alloy (usable depth 49mm)	80x80x51.5	M20	1	1	1	XAPD1201	3727
	80x80x51.5	M20	2	2	0	XAPD1202	4119
	80x130x51.5	M20	2	1	2	XAPD2202	5338
	80x130x51.5	M20	3	1	3	XAPD2203	5345
	80x130x51.5	M20	4	2	2	XAPD2204	5292
	80x175x51.5	M20	3	1	3	XAPD3203	6540
	80x175x51.5	M20	4	1	4	XAPD3204	6599
	80x175x51.5	M20	6	2	3	XAPD3206	6653
Zinc Alloy (usable depth 74.5mm)	80x80x77	M20	1	1	1	XAPD1501	4505
	80x80x77	M20	2	2	1	XAPD1502	4865
	80x130x77	M20	2	1	2	XAPD2502	6349
	80x130x77	M20	3	1	3	XAPD2503	6347
	80x130x77	M20	4	2	2	XAPD2504	6345
	80x175x77	M20	3	1	3	XAPD3503	4722
	80x175x77	M20	4	1	4	XAPD3504	7674
	80x220x77	M20	4	1	3	XAPD4504	8715
	80x220x77	M20	5	1	4	XAPD4505	8703
	80x220x77	M20	6	1	5	XAPD4506	8738
	80x220x77	M20	8	2	4	XAPD4508	8959
Die-cast Metal enclosure XAPK (Yellow “RAL 1003” lid and base)							
Zinc Alloy(usable depth 49 mm)	80x80x5.5	M20	1	1	1	XAPK1201	4386
Zinc Alloy(usable depth 74.5 mm)	80x80x77	M20	1	1	1	XAPK1501	5183

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS
W.E.F. July 15th, 2025



Human Machine Interfaces Product Line-up Guide

Harmony Panels and Industrial PCs

se.com/in

Basic HMI panels for simple machines

Harmony ST6 — High-resolution and cost-efficient basic HMI



Harmony STM6: W4", W7"
Harmony ST6/STW6: W4", W7", W10", W12", W15"



Modular Harmony STM6



Modular HMI Gateway Box



Edge Box HMI



Supporting Software



EcoStruxure Operator Terminal Expert



EcoStruxure Machine SCADA Expert



HTML 5

- Cost-effective with good quality
- Fits into Schneider EcoStruxure Architecture
- Superior high-resolution screen with 16M colors
- Powered by new-generation software "EcoStruxure Operator Terminal Expert" for high-quality graphics and stylish design
- Tool-free mounting with newly-designed mounting fastener, no need for screwdriver
- 2x Ethernet with Dual IP, end-to-end Cybersecurity
- Modular HMI version with push button 22 mm/0.866 in. mounting system
- Web HMI version with embedded browser (instead of HMI software) for visualizing HTML5 servers on industrial devices
- Remote visualization using Web Viewer feature
- Faceless HMI version with STM6 Gateway Box and Web Viewer feature for applications that do not need a full time operator screen
- Supports Cloud Services on Edge Box HMI (HMISTM6BOXIOT) due to the power of EcoStruxure Machine SCADA Expert software

Harmony STO7 — Compact color HMI



Supporting Software



Harmony STO7: W4.3"



EcoStruxure Operator Terminal Expert

- TFT color screen with 480 x 272 pixels
- Removable logo stickers
- Larger screen with full-size ratio in the 4.3" class
- 3 versions for various communication types

Harmony GTO — Standard HMI



Supporting Software



Harmony GTO: 3.5", 5.7", W7", 7", 10", 12"



Vijeo Designer

- Excellent brightness with TFT 65K colors
- Stainless steel panel for food and beverage applications
- Standard front and IP65 degree of protection
- Extended Temperature - up to 55 °C/131 °F
- Easy to install and sustainable offer
- Full range of international certifications
- No logo and full conformal coating versions available

Harmony STU — Cut-out free HMI



Supporting Software



Harmony STU: 3.5", 5.7"



Vijeo Designer

- Compact for space saving
- Innovative tool-free mounting via 22.5 mm/0.885 in. hole
- Ethernet port RJ45 10BASE-T/100BASE-TX
- Separately mounted via 3 m or 5 m cable with mounting adapter
- Modular design for easy maintenance

Harmony SCU — Cut-out free HMI controller



Supporting Software



Harmony SCU: 3.5", 5.7"



EcoStruxure Machine Expert

- Optimum all-in-one combination for HMI and Control
- Innovative tool-free mounting via 22.5 mm/0.885 in. hole
- Reduce machine assembly time and cost
- Space saving
- Embedded CANopen port for field networking
- Modular design for easy maintenance

Harmony ST6 — High-resolution and cost-efficient basic HMI



Harmony ST6 HMI panels range in sizes from 4" to 15" wide combining the exceptional quality of good graphics and stylish design. They are available in basic, modular, web and Edge Box. The ST6 and STM6 panels offer an improved user operation experience through an intuitive design powered by EcoStruxure Operator Terminal Expert software. The STW6 panels have a pre-installed browser that provides a ready-to-use agnostic terminal allowing all devices to be visualized within an HTML5 server. The Edge Box HMI, thanks to the power of EcoStruxure™ Machine SCADA Expert software, provides an affordable Box to get ready for Cloud Services EcoStruxure Machine brings together key technologies for product connectivity and on-premise edge control, and cloud technologies to provide analytics and digital services. EcoStruxure Machine helps you bring more innovation and added value to your customers throughout the entire machine life cycle. The Harmony ST6/STW6/STM6 and the Edge Box HMI versions meet IIoT challenges at the Connected Products level, by providing secure communication, connectivity, and efficiency to the required software and applications at the Edge Control level, thus opening up more business opportunities.

Product Description	Reference	Unit MRP [₹]
4" W basic operator terminal	HMIST6200	On Request
7" W basic operator terminal	HMIST6400	On Request
10" W basic operator terminal	HMIST6500	On Request
12" W basic operator terminal	HMIST6600	On Request
15" W basic operator terminal	HMIST6700	On Request
"4"W basic modular terminal"	HMISTM6200	On Request
"7"W basic modular terminal"	HMISTM6400	On Request
Basic HMI Gateway , STM6	HMISTM6BOX	On Request
"4"W basic Web terminal"	HMISTW6200	On Request
7" W basic Web terminal	HMISTW6400	On Request
10" W basic Web terminal	HMISTW6500	On Request
12" W basic Web terminal	HMISTW6600	On Request
15" W basic Web terminal	HMISTW6700	On Request
Basic HMI Edge Box, STM6	HMISTM6BOXIOT	On Request

Harmony STO7 - Compact color HMI



- Best-in-class display
- With screen quality based on ppi similar to Harmony GTU, the Harmony STO7●●
- 4.3" color screens support crisp-clear visualization and a high quality display.
- This enables you to create more attractive and distinguished applications for industry.

Product Description	Reference	Unit MRP [₹]
4.3" touch panel screen RS232C	HMISTO705	On Request
4.3" touch panel screen RS232C/485	HMISTO715	On Request
4.3" touch panel screen Ethernet	HMISTO735	On Request
RTC battery set	HMIZSRTC1	On Request

Harmony STU - Cut-out free HMI



- Harmony STU panels are compact open panels offering greater communication capabilities. The high resolution touch screens, clever mounting system, and HMI software make them ideal for machine manufacturer solutions in industry and infrastructure
- No panel cut-out is required to install a Harmony STU small panel. All you need to do is drill a hole measuring 22 mm in diameter - just like installing a push button. The front module (comprising the screen) is connected to the rear module (comprising the terminals and connectors) via this 22 mm drilled hole

Product Description	Reference	Unit MRP [₹]
Touch Panel Screen 3"5 Color	HMISTU655	On Request
Touch Panel Screen 5"7 Color	HMISTU855	On Request
STU 3in5 without marking on overlay	HMISTU655W	On Request
STU 5in7 without marking on overlay	HMISTU855W	On Request
STU 3in5 front module	HMIS65	On Request
STU 5in7 front module	HMIS85	On Request
STU rear module	HMIS5T	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ **NORMAL STOCK ITEMS**

W.E.F. July 15th, 2025

Harmony GTO - Standard HMI



- Standard and Stainless HMI panels with 3.5" to 12.1" screen.
- Harmony GTO Standard HMI panels feature optimized information and communication technologies, which, depending on the model, include:
- High level of communication (embedded Ethernet, multilink, Web server and FTP, e-mail).
- External storage of data (SD memory card and USB memory stick) for storing production data and backing up applications.
- Management of peripherals: printers, etc.
- These panels offer an excellent level of technical performance designed Principally for use by OEM customers.
- The Harmony GTO range has been designed in accordance with numerous standards, certifications and requirements:
 - Standards: EN 61131-2, 61000-6-2 and UL508,
 - Certifications: C-tick, GOST-R, KCC Atex and UL Hazardous location (pending), Marine certifications (pending).
 - Operating temperature: up to 55°C
 - Degree of protection (according to IEC 60529):
 - IP 65 for standard version products
 - IP 67 for standard version products fitted with a cover for harsh environments.
 - IP 66K for "Stainless Steel" version products
- Resistance to high-pressure cleaning (conforming to DIN 40050-9): up to 10 bar for "Stainless Steel" version products.

Product Description	Reference	Unit MRP [₹]
3.5 Color Touch Panel QVGA-TFT	HMIGTO1300	On Request
3.5 Color Touch Panel QVGA-TFT	HMIGTO1310	On Request
5.7 Color Touch Panel QVGA-TFT	HMIGTO2300	On Request
5.7 Color Touch Panel QVGA-TFT	HMIGTO2310	On Request
5.7 Color Touch Panel QVGA Stainless	HMIGTO2315	On Request
7.0 Color Touch Panel WVGA-TFT	HMIGTO3510	On Request
7.5 Color Touch Panel VGA-TFT	HMIGTO4310	On Request
10.4 Color Touch Panel VGA-TFT.	HMIGTO5310	On Request
HMIGTO5310 Coated	HMIGTO5310FC	On Request
HMIGTO5310 coated and logo removed	HMIGTO5310FCW	On Request
HMIGTO5310 logo removed	HMIGTO5310FW	On Request
10.4 Color Touch Panel VGA Stainless	HMIGTO5315	On Request
12.1 Color Touch Panel SVGA-TFT	HMIGTO6310	On Request
HMIGTO6310 Coated	HMIGTO6310FC	On Request
12.1 Color Touch Panel SVGA Stainless	HMIGTO6315	On Request

Harmony SCU — Cut-out free HMI controller



The ultra-compact range of Harmony SCU HMI controllers are part of Schneider Electric's Flexible Machine Control concept, a key element in MachineStruxure™. The Harmony SCU HMI controllers offer brings together Human Machine Interface and control functions within in a single product. This reduces the amount of equipment required and the associated costs throughout the life cycle of the machine. The Harmony SCU integrate, as standard, all their functions. They benefit, in particular, from the same innovation as the Harmony STU panels range: Mounting via a 22 mm diameter hole (pushbutton type) which considerably simplifies installation.

Of modular design, this range comprises:

- 2 complete Harmony SCU products for the control of simple machines, comprising:
 - A 3.5" or 5.7" 65 k color TFT Screen module
 - A Controller module with 16 integrated digital inputs/10 integrated digital outputs
- 2 complete Harmony SCU products for the control of simple processes, comprising:
 - A 3.5" or 5.7" 65 k color TFT Screen module.
 - A Controller module with 8 integrated digital inputs/8 integrated digital outputs and 4 integrated analog inputs/2 integrated analog outputs

Product Description	Reference	Unit MRP [₹]
3.5 Small Controller Panel For Machine	HMISCU6A5	On Request
3.5 Small Controller Panel For Process	HMISCU6B5	On Request
5.7 Small Controller Panel For Machine.	HMISCU8A5	On Request
5.7 Small Controller Panel For Porcess	HMISCU8B5	On Request
Rear Module Small Controller Process	HMISBC	On Request
Rear Module Small Controller Machine	HMISAC	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Advanced HMI panels for performance machines

Harmony GTU — High performance modular HMI



Supporting Software



Harmony GTU: W7", 10", W10", 12, W12", 15", W15", W19"



Box

Display

Tool-free
mounting

Complete
HMI

- 8 sizes of high-resolution displays ranging from 7" to 19", either with modern 16:9 or standard 4:3 ratio
- 3 boxes, two with Real Time OS and one with fully open Windows based
- Up to 2 separate Ethernet ports, serial communication ports, and field bus options suiting IoT
- Industrial multi-touch and fully coated offer
- All memory removable for PC-free box replacements
- Wireless LAN enabled display
- Easy to install with integrated mounting fastener and antidrop lock
- Multi-display capability with Open box using DVI interface or multi-display adapter



EcoStruxure Operator
Terminal Expert



Vijeo
Designer

Harmony GTUX — eXtreme HMI



Supporting Software



Harmony GTUX: W7", W12", W15"

- A wide temperature range from -30...+70 °C / -22 ...+158 °F
- Sunlight Readable: High brightness LCD (1000 cd/m²), anti-glare surface
- Robustness: UV Protection, conformal coated (fully coated)
- Dust and water proof (IP66F, IP67F and UL50E Type 4X (Outdoor use))
- Environmental standard: Class 1, Div. 2, ATEX/IECEx Zone 2/22
- Variety of interfaces including dual Ethernet ports
- Modular design with stainless front face
- Suitable for industry segments like Oil & gas, Water and Waste Water (WWW) management



Vijeo
Designer

Harmony GK — Keyboard HMI



Supporting Software



Harmony GK: 5.7", 10.4"

- Fine control inputs even in severe environment
- Touch screen and keypad keys configurable simultaneously or separately
- Highly robust with operating temperatures up to 55 °C / 131 °F, reducing maintenance problems and time



Vijeo
Designer

Harmony GTU — High performance modular HMI



Harmony GTU are universal panels that include smartphone-like interface and Wireless technology. They offer unmatched comfort of use with no compromise on performance and openness.

Product Description	Reference	Unit MRP [₹]
Premium BOX for Universal Panel	HMIG3U	On Request
Standard Box for Universal Panel	HMIG2U	On Request
Open BOX for Universal Panel	HMIG5U2	On Request
Open BOX Universal Panel	HMIG5U22	On Request
7W Touch Advanced Display WVGA	HMIDT351	On Request
10W Touch Advanced Display WXGA	HMIDT551	On Request
10.4 Touch Smart Display SVGA	HMIDT542	On Request
12W Touch Advanced Display WXGA	HMIDT651	On Request
12.1 Touch Smart Display XGA	HMIDT642	On Request
15 Touch Smart Display XGA	HMIDT732	On Request
15W Touch Smart Display FWXGA	HMIDT752	On Request
19W Touch Smart Display FWXGA	HMIDT952	On Request

Harmony GTUX — eXtreme outdoor HMI panels for harsh outdoor environment



- Harmony GTUX is a modularly designed robust terminal suitable for harsh outdoor environments. Features like high brightness and UV protection to direct sunlight, protection against water and dust, and supporting a wide range of temperatures make it an ideal choice for direct outdoor operation in O&G, WWW, and MMM segments.
- Harmony eXtreme panels can be used in applications like smart energy generation (solar, wind turbine, biomass, hydropower genset, etc.), hoisting, compressor, pumping, and car charging/washing.

Product Description	Reference	Unit MRP [₹]
Extreme BOX	HMIG3X	On Request
7W Touch eXtreme Display WVGA	HMIDT35X	On Request
12W Touch eXtreme Display WXGA	HMIDT65X	On Request
15W Touch eXtreme Display FWXGA	HMIDT75X	On Request
Box Module Fixing Bracket for 7W	HMIZXFIX1	On Request
Box Module Fixing Bracket for 12W & 15W	HMIZXFIX2	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Harmony GK — Keyboard HMI



- Harmony HMI GK graphic terminals share technical characteristics with Harmony GTO to enhance the operator's experience. Ultra-flexible, with two screen sizes (5"7 and 10"4), the Harmony HMI GK can be configured and controlled to precisely match your requirements.
- Designed to operate in severe environments, the Harmony HMI GK offers you optimum control on the keypad, as well as on the touch screen. The latest design is consistent with the Harmony USB keypad (HMIZKB1), ideal for keypad control on small Harmony panels

Product Description	Reference	Unit MRP [€]
5.7 Keypad Panel QVGA-TFT	HMIGK2310	On Request
10.4 Keypad Panel VGA-TFT	HMIGK5310	On Request

Easy Harmony ET6

Harmony ET6 - Essential touchscreen
panels for simple machines

- Range from 7" to 15", Easy Harmony ET6 is a robust and cost-effective touch screen panel that provides refined display, quick touch response and Ethernet capability. The Easy Harmony ET6 is designed with the secure development life-cycle (SDL) process and enhanced the Cybersecurity with secure boot and encrypted transfer.
- Target Segments: Packaging, HVAC, Pumping, Metal Working, Pharmacy, and other miscellaneous sectors of activities

Product Description	Reference	Unit MRP [€]
7"W Easy Touch Panel, Ethernet model	HMIET6400	On Request
10"W Easy Touch Panel, Ethernet model	HMIET6500	On Request
12"W Easy Touch Panel, Ethernet model	HMIET6600	On Request
15"W Easy Touch Panel, Ethernet model	HMIET6700	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Harmony Industrial PCs and Edge Box for line management

Harmony P6 Industrial PCs - Drive efficiency and productivity at the Edge of EcoStruxure



Supporting Software



Node-RED




EcoStruxure Operator
Terminal Expert



EcoStruxure
Machine
SCADA Expert



Harmony P6 Modular Box and Modular Display: 12", 15", W10", W12", W15", W19", W22"

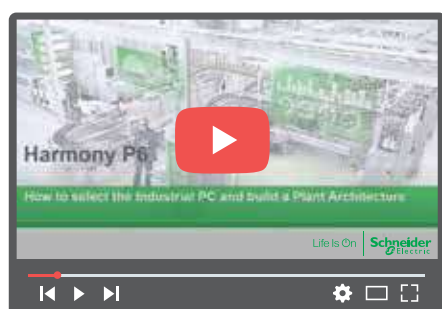

How to select the Industrial PC and build a Plant Architecture Click to view the video

- HMIP6 ⁽¹⁾
 - Advanced Modular Box PC
 - Intel Core i5 up to 4.1 GHz or Intel Core i7 up to 4.4 GHz or Intel Celeron up to 2.0 GHz, UHD Graphics accelerator
 - 8 to 32 GB or 4 to 16 GB DDR4 RAM, 1x M.2 SSD SATA and 2x 2.5-inch SATA (HDD/SSD) storage slots
 - USB Type A (2x USB 2.0 and 2x USB 3.0), USB Type C (1x USB 3.0), 1x COM RS-232C, 2x RJ45 Ethernet, 1x Display port
 - 2x interface slots and optional extension module for 2x PCI/PCIe slots
 - Default TPM module for encryption
 - RAID HDD with Intel Rapid storage
 - Standard Modular Box PC
 - Intel Core i3 up to 3.9 GHz, UHD Graphics accelerator
 - 8 to 32 GB DDR4 RAM, 1x M.2 SSD SATA and 1x 2.5-inch SATA (HDD/SSD) storage slots
 - USB Type A (2x USB 2.0 and 2x USB 3.0), USB Type C (1x USB3.0), 1x COM RS-232C, 2x RJ45 Ethernet, 1x Display port
 - 2x interfaces slots
 - Default TPM module for encryption
- HMIDM6
 - 4:3 12" and 15" (XGA) color LCD resistive analog multi-touch (2 points) screen with 1x USB 2.0 (Type A), and front USB cover
 - 16:9 10" and 12" (WXGA)/15" (FWXGA)/19" and 21" (FHD) projected capacitive multi-touch (2 points) screen, 7H hardness, anti-scratch, 3 touch mode configuration
 - IP66, Nema 4X indoor front panel
 - All models are certified for CE, RCM, UL 61010-2-201, CSA C22.2 No. 61010-2-201, UL121201, and CSA C22.2 No. 213
 - All DC models are certified for IECEx/ATEX for use in Zone 2 gas/Zone 22 dust, DNV

Harmony FP6 — Industrial Flat Panel Monitors



Harmony HMIFP6 : 12", 15", W10", W12", W15", W19", W22"

- HMIFP6
 - 4:3 12" and 15" (XGA) color LCD resistive analog multi-touch (2 points) screen with 1x USB 2.0 (Type A), and front USB cover
 - 16:9 10" and 12" (WXGA)/15" (FWXGA)/19" and 22" (FHD) projected capacitive multi-touch (2 points) screen, 7H hardness, anti-scratch, 3 touch mode configuration IP66, Nema 4X indoor front panel
 - All models are certified for e, RCM, UL 61010-2-201, CSA C22.2 No. 61010-2-201, UL121201⁽⁴⁾, and CSA C22.2 No. 213⁽⁴⁾, IECEx/ATEX for use in Zone 2 gas/Zone 22 dust⁽⁴⁾

Product Description	Reference	Unit MRP [₹]
FP6, 10w WXGA, PCAP, DVI, DC	HMIFP6500WCD	On Request
12.1 XGA, Analog-Multi, DVI, DC	HMIFP6600TMD	On Request
FP6, 12w WXGA, PCAP, DVI, DC	HMIFP6600WCD	On Request
FP6, 15.0 XGA, Analog-Multi, DVI, DC	HMIFP6700TMD	On Request
FP6, 15w FWXGA, PCAP, DVI, DC	HMIFP6700WCD	On Request
FP6, 19w Full HD, PCAP, DVI, DC	HMIFP6800WCD	On Request
FP6, 22w Full HD, PCAP, DVI, DC	HMIFP6900WCD	On Request

(1) Available as Configured-to-order only and can be ordered using the online configurator.

(4) On the front panel when properly installed in an enclosure and not using the front panel USB port.

EcoStruxure Operator Terminal Expert — Touchscreen configuration software



EcoStruxure Operator Terminal Expert



- Operate intuitively
 - Ability to go beyond the limitations of the physical screen size to improve productivity
 - Convert already created Landscape screens into Portrait screens for vertical scrolling and for screens that require many operation switches
- Reduce time to market
 - Efficient and intuitive engineering
 - For faster customization and modification
- Improve efficiency
 - High usability and image quality for the operator (experience design)
 - With Web Viewer feature, watch/operate the HMI screen remotely with mirroring function

EcoStruxure Machine SCADA Expert - Lite SCADA for line management



EcoStruxure Machine SCADA Expert



- Save time
 - Quick and easy to install directly on our iPCs
 - Save days of testing and commissioning thanks to a fully tested and validated association
 - Tailored information at a glance using BI-Dashboard template
- Save money
 - Get peace of mind and save time and resources with our single point of contact for Hardware/Software/Operating System support
 - Access SCADA level software, with all its benefits, at a competitive cost/features ratio
- Connectivity and data management
 - Includes 250+ native communication drivers
 - Monitor and control remotely your application with Mobile Access, using a tablet or smartphone

Note: For Harmony HMIP6, EcoStruxure Machine SCADA Expert Runtime preinstalled version is available as an option in the online configurator.

Vijeo Designer — Classic HMI configuration software



Vijeo Designer



- Multi-platform: from optimized panels to iPCs
- Multi-panel communication: automatic data sharing between up to 8 different panels
- Multi-language: 15 languages in runtime and 38 alphabets
- Multi-protocol: on COM and Ethernet ports
- Multi-access: local or remote display with WEB Gate, Vijeo Designer Air and Vijeo Designer Air Plus
- Multi-media: video/sound record/replay capability

EcoStruxure Operator Terminal Expert - Touchscreen configuration software



- EcoStruxure Operator Terminal Expert allows you to create and edit application screens that control automation systems for Harmony GTU (Premium and Open Box)/STO color/ST6/STM6 terminals, and Harmony industrial PCs (Panel and Box).
- EcoStruxure Operator Terminal Expert features a modern and simple-to-use user interface, easy-to-access functions and information, and a multi-platform working environment. It also shortens design time by providing pre-made navigation framework.

Product Description	Reference	Unit MRP [₹]
Operator Terminal Expert Group, Email	HMIPELCZLGPAAZ	On Request
Operator Terminal Expert Pro, Email	HMIPELCZLSPAZZ	On Request
Operator Terminal Expert Team, Email	HMIPELCZLTPAAZ	On Request
Operator Terminal Expert Vendor, Email	HMIPELVZLSPAZZ	On Request
Web Viewer 3.x, EOTE, Single (1), Perm	HMIWRT001A	On Request
Web Viewer 3.x, EOTE, Single (10), Perm	HMIWRT010A	On Request
Web Viewer 3.x, EOTE, Single (100), Perm	HMIWRT100A	On Request

EcoStruxure Machine SCADA Expert - Lite SCADA for line management



- EcoStruxure Machine SCADA Expert enables you to use the key features of Microsoft operating system and build a full-featured SCADA or HMI project for your industrial automation business.
- EcoStruxure Machine SCADA Expert is designed in a modern, ribbon-based Windows interface to provide an integrated and user-friendly development environment.
- EcoStruxure Machine SCADA Expert supports capabilities like scripting, animation, E-mail, recipes, security, tags database, multi-touch, alarms, trends, scalability, multilanguage, FDA traceability, PDF export, graphics and design tools, and so on.
- For applications ranging from complex machine control and monitoring to plant supervision and SCADA, EcoStruxure Machine SCADA Expert with Harmony iPC association makes industrial operations smooth and stress-free.

Product Description	Reference	Unit MRP [₹]
EcoStruxure Machine SCADA Expert Basic reissue license with 500 tags	HMIEMSERT500A	On Request
EcoStruxure Machine SCADA Expert Supervision, Third party runtime license with 500 tags	HMIEMSE3PRT500A	On Request
EcoStruxure Machine SCADA Expert Line management, Upgrade license for third party runtime license with 1500 tags	HMIEMSE3PUG1KRTA	On Request
EcoStruxure Machine SCADA Expert Basic Buildtime license with 500 tags	HMIEMSEBT500A	On Request
EMSE 3 Party 1.5K Tag RT License	HMIEMSE3PRT1KA	On Request
EMSE 3 Party 32K Tag RT License	HMIEMSE3PRT32KA	On Request
EMSE 3 Party 4K Tag RT License	HMIEMSE3PRT4KA	On Request
EMSE 3 Party 64K Tag RT License	HMIEMSE3PRT64KA	On Request
EMSE 1.5K Tag BT License	HMIEMSEBT1KA	On Request
EMSE 32K Tag BT License	HMIEMSEBT32KA	On Request
EMSE 4K Tag BT License	HMIEMSEBT4KA	On Request
EMSE 64K Tag BT License	HMIEMSEBT64KA	On Request
EMSE 1.5K Tag RT License	HMIEMSERT1KA	On Request
EMSE 32K Tag RT License	HMIEMSERT32KA	On Request
EMSE 4K Tag RT License	HMIEMSERT4KA	On Request
EMSE 64K Tag RT License	HMIEMSERT64KA	On Request
EMSE Thin Client	HMIEMSETCA	On Request
EcoStruxure Machine SCADA Expert, USB hardkey license	HMIEMSEUSBL	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Vijeo Designer — Classic HMI configuration software



The cross-platform VijeoDesigner™ configuration software can be used to create operator dialogue applications for controlling automation systems for the following panels:

- Harmony STU (Vijeo Designer Limited Edition is sufficient)
- Harmony GTO
- Harmony GTU
- Harmony GTUX
- Harmony GK
- Magelis XBTGH portable
- Harmony Panel PCs and Box PCs (HMIBMP, HMIBMU, HMIPSP, HMIPSO, HMIPEP)
- Harmony P6


Product Description	Reference	Unit MRP [€]
Vijeo Designer 6.3, HMI configuration software single license	VJDBTPRO1P	On Request
Vijeo Designer 6.3, HMI configuration software group license	VJDBTPRO3P	On Request
Vijeo Designer 6.3, HMI configuration software team license	VJDBTPRO10P	On Request
Vijeo Designer 6.3, HMI configuration software entity license	VJDBTPRO100P	On Request
Vijeo Designer 6.3, HMI configuration software single upgrade license	VJDUBTPRO1P	On Request
VJD Runtime, Vijeo Designer, Standard PC	VJDRTPROS1P	On Request
VJD Runtime, Vijeo designer, Harmony P6	VJDRTPROH1P	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

EcoStruxure Secure Connect — Secure remote access solution

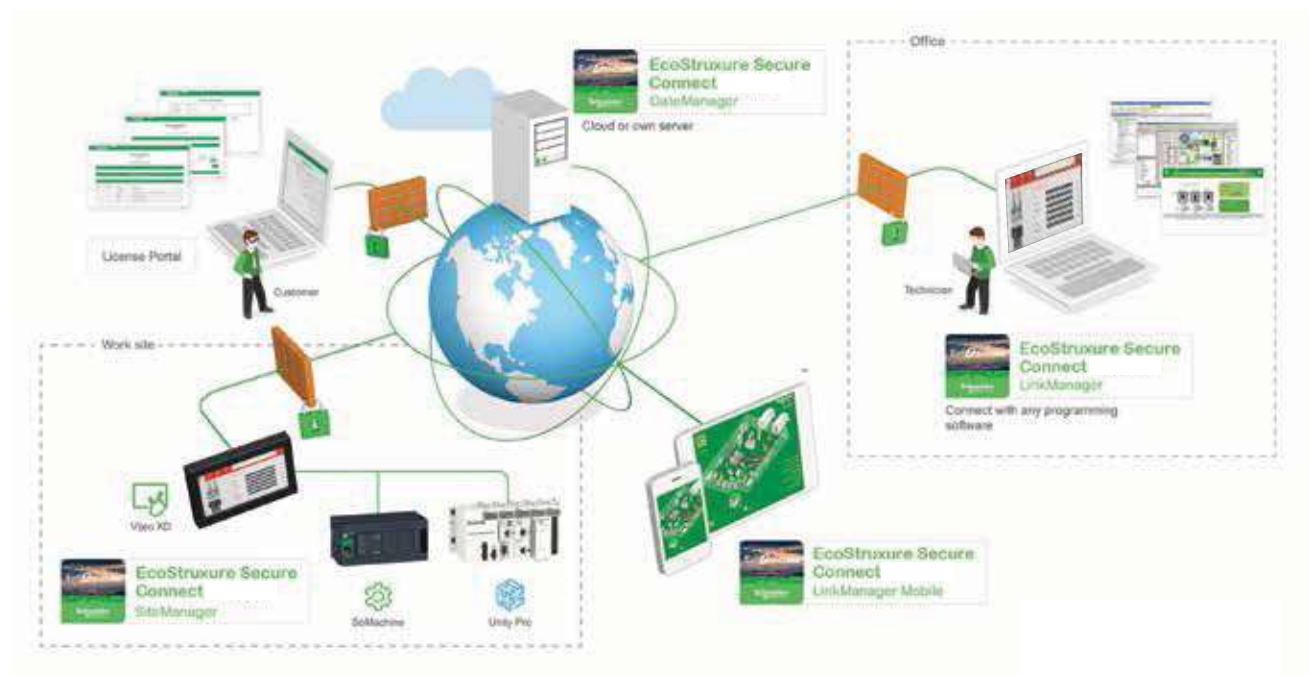

- Provides a secure connection between remote display units on the work site (via SiteManager Embedded) and computers or smart devices in the office (via LinkManager) over a secure central server (GateManager).
- With EcoStruxure Secure Connect, maintenance personnel can access Schneider Electric software and update it remotely and securely via the HMI, PLC, and other connected devices as if they were on site.
- Troubleshooting and repairs can be performed remotely upon request.

EcoStruxure Secure Connect - Secure remote access solution



EcoStruxure Secure Connect provides a secure connection between remote display units on the work site (via SiteManager Embedded) and computers or smart devices in the office (via LinkManager) over a secure central server (GateManager). With EcoStruxure Secure Connect, technicians and programmers can remotely access the Schneider Electric software and securely update it via the HMI, PLC, and other connected devices just as though they were present on site. Troubleshooting and repair can also be performed remotely upon request.

Product Description	Reference	Unit MRP [₹]
Vijeo Connect Link Manager License	VJOCNTLML	On Request
Vijeo Connect Link Manager Mobile Lic	VJOCNTLMM	On Request
Secure Connect Enterprise Pack	VJOCNTPACKENT	On Request
Secure Connect Essential Pack	VJOCNTPACKESS	On Request
Vijeo Connect Site Manager Basic License	VJOCNTSMBASIC	On Request
Vijeo Connect Site Manager Ext 10 Lic	VJOCNTSMEXT10	On Request
Vijeo Connect Site Manager Ext 5 Lic	VJOCNTSMEXT5	On Request
Vijeo Connect User statistics	VJOCNTSTAT	On Request
Vijeo Connect Gate Manager PremiumAccess	VJOCNTGMPREM	On Request



years of TeSys...

> Control > Protect > Power > Active

Innovative and connected solutions for motor starters

TeSys is an innovative motor control and management solution from the global market leader. TeSys offers connected, efficient products and solutions for switching and protection of motors and electrical loads in compliance with all major global electrical standards

TeSys Function Names

TeSys components are grouped by function name, for easier identification. These functions are related to motor, power, control and protection.

> TeSys Power:

Components for powering motors_____



> TeSys Control:

Components for controlling motors_____



> TeSys Protect:

Components for protecting motors_____



> TeSys Active:

Connected components for motor circuits_____



Start smart. Run smart. With **TeSys** motor controls.




Stay smart with the world's best-selling motor control solutions from the inventor of the world's first contactor - Schneider Electric™.

For almost a century, TeSys motor controls have driven the industry with innovations in motor protection, monitoring, and control.

It started with the introduction of the industry's first BAR contactor in 1924, and today, the legacy of innovation is built into every TeSys motor control device.

Best-in-class safety and reliability, plug-and-play architecture, and flexible functionality mean TeSys motor control solutions can meet your requirements across a wide range of applications, from the most common to the most advanced.

A Century of Innovation and Leadership

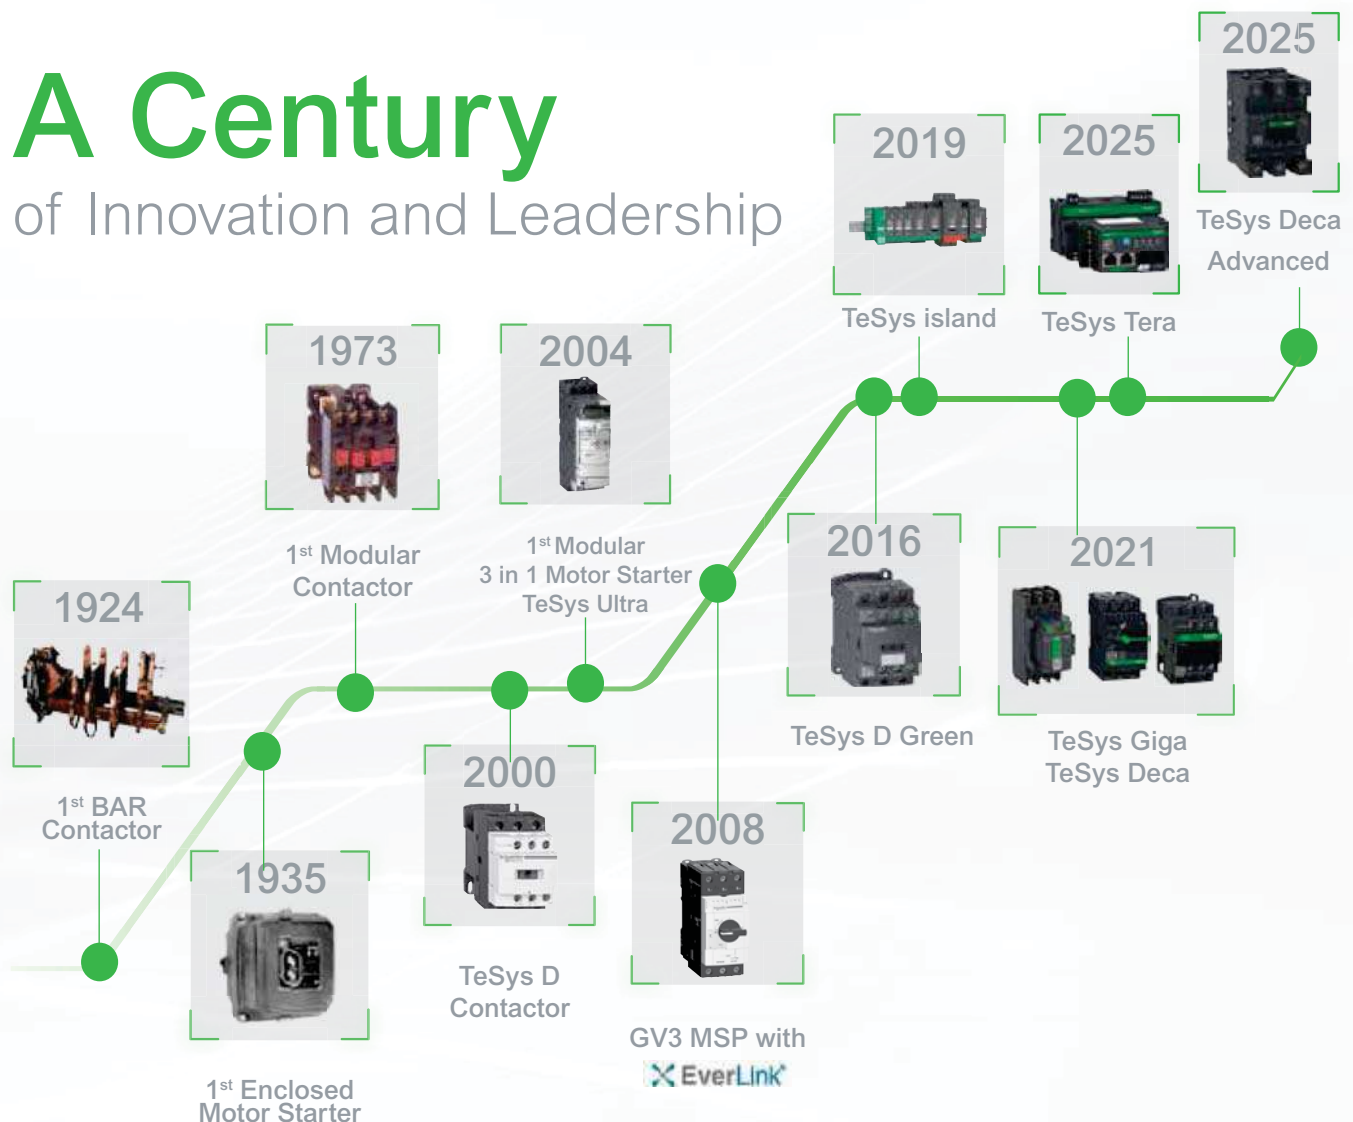

Superior safety for all industries

TeSys motor controls come with all of the isolation, protection and emergency handling you need to comply with international codes. High-contrast covers identify safety-critical devices to prevent inadvertent manual operation. Every TeSys contactor is both mechanically linked and equipped with mirror contacts for safety applications and wherever auxiliary contact state reliability is critical.



HVAC

Ensure 24/7 availability of your HVAC system with reliable products that can reach high ambient temperatures without derating.



Conveying

Decentralize the control cabinet of your conveyor line and benefit from up to 80% space reduction.



Genset

Make certain your generator starts even in the harshest conditions with robust **TeSys** solutions.



Pumping

Optimize single or multi-drive boosters for industry or infrastructure with energy and cost-effective solutions.



Packaging

Keep pace with the most demanding, high-end packing applications with solutions that can perform 30 million AC53a electrical cycles, like **TeSys H**.



Oil and Gas

Keep your employees and assets safe and improve uptime in onshore and offshore applications: pipeline operations: LNG and natural gas processing; and refining and petrochemical applications.



Water and Wastewater

Optimize the treatment and delivery of safer water by reducing energy usage and lowering operating costs.



Food and Beverage


Serve your customers with environmentally friendly products to improve sustainability, efficiency, and flexibility, allowing you to adapt to changing customer habits.

Online selection tool

EcoStruxure™ Motor Control Configurator

For Direct-On-Line and Star-Delta starters, motor circuit breakers with advanced protection, motor management relays, configurations for total coordination, drives, and soft starters.

No matter what kind of starting method you need, our online EcoStruxure™ Motor Control Starter Configurator will help you to quickly and easily select the optimal combination of components to ensure maximized motor safety, protection, and uptime.

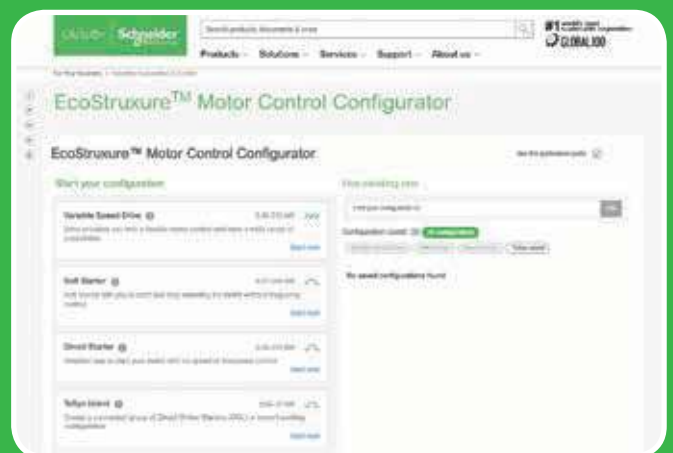

Scan or click on
the QR code

TeSys Range

TeSys Component Series Names

Series names are now grouped as per the current ratings

- Series names group conventional components (circuit breakers, contactors, relays, overcurrent relays) by current rating ranges.
 - 0 to 16 A > **TeSys K** Series
 - 9 to 150 A > **TeSys 'Deca'** Series
 - 185 to 800 A > **TeSys 'Giga'** Series.
- TeSys advanced components have a specific classification.
 - 0 to 38 A All-in-one starters > **TeSys 'Ultra'** Series
 - 0 to 80 A Motor Control/Protection/Monitoring system > **TeSys 'island'** Series.
- Other TeSys component names remain unchanged (TeSys F, TeSys B, TeSys T).

> TeSys K Series

The essential line for motors up to 7.5kW/16A direct on TeSys K series of Motor Starters



> TeSys Deca Series

The industrial standard for motors up to 75kW/150A direct on TeSys Deca series of Motor Starters



> TeSys Giga Series

For large motors up to 450kW/800A direct on TeSys Giga Series



> TeSys Ultra Series

The most compact totally coordinated solution for Motor Starters. For Direct On Line or Reversing Motor Control and Drive Protection upto 18.5kW/38 A on TeSys Ultra series



> TeSys Island Series

Digitally powered monitoring, control and protection of electrical motors up to 37kW/80 A on TeSys Island Series



Control Relays - K Model (AC & DC Control)



- Conformance IEC, UL, CSA, CE Marking
- Inbuilt 4 auxiliary contacts
- 10A thermal rating
- Available with AC (50/60Hz Dual frequency), DC & DC low consumption coil options

No of Poles	AC Control Reference	Unit MRP [₹]				DC Control Reference ⁽⁴⁾	Unit MRP [₹]		
		B7 (24V)	F7 (110V)	M7 (220V)	N7 (415V)		BD (24V)	FD (110V)	MD (220V)
2NO + 2NC	CA2KN22*	2085	2085	2085	2085	CA3KN22**	2900	2900	2900
3NO + 1NC	CA2KN31*	2085	2085	2085	-	CA3KN31**	2900	2900	2900
4NO	CA2KN40*	2085	2085	2085	2490				

No of Poles	DC low consumption Reference ^{(1) (2) (3)}	Unit MRP [₹]		
		BW3 (24V)	EW3 (48V)	SW3 (72V)
2NO + 2NC	CA4KN22***	3555	4265	3555
3NO + 1NC	CA4KN31***	3555	4265	-
4NO	CA4KN40***	3555	4265	-

For other coil voltage ratings regarding above, please contact Schneider Electric customer care.

* Reference to be completed by adding coil voltage code

(1) Compatible with PLC outputs

(2) Wide range coil (0.7...1.25Uc), suppressor fitted as standard

(3) 2 pole auxiliary contact block can be mounted additionally

(4) Optional in-built surge suppressor available

Power Contactors - K Model (3 Pole AC & DC Control)



- Conformance to IEC, UL, CSA
- Current Rating : 6A to 16A, AC-3 duty
- 1NO or 1NC inbuilt auxiliary contact
- Available in 3P & 4P version
- Available with AC (50/60Hz Dual frequency), DC & DC low consumption⁽⁵⁾ coil options

Motor Power (kW)	Auxiliary Contacts	AC Control Reference	Unit MRP [₹]				DC Control Reference ⁽⁵⁾	Unit MRP [₹]		
			B7 (24V)	F7 (110V)	M7 (220V)	N7 (415V)		BD (24V)	FD (110V)	MD (220V)
3	1NC	LC1K0601*	1830	1830	1830	2225	LP1K0601**	2860	3455	-
	1NO	LC1K0610*	1830	1830	1830	1830	LP1K0610**	2860	3455	-
5.5	1NC	LC1K0901*	1915	1915	1915	2315	LP1K0901**	3110	3110	3110
	1NO	LC1K0910*	1915	1915	1915	1915	LP1K0910**	3110	3110	3110
7.5	1NC	LC1K1201*	2165	2165	2165	-	LP1K1201**	3605	-	-
	1NO	LC1K1210*	2165	2165	2165	2610	LP1K1210**	3605	4360	4400
10	1NC	LC1K1601*	2560	2560	2560	-	-	-	-	-
	1NO	LC1K1610*	2560	2560	2560	-	-	-	-	-

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

(5) For low consumption offer, please contact Customer Care

Reversing Contactors - K Model



- Conformance to IEC, UL, CSA, CE
- Current Rating : 6A to 16A, AC-3 duty
- 1NO or 1NC inbuilt auxiliary contact
- Available in 3P & 4P version
- Available with AC(50/60Hz Dual frequency), DC & DC low consumption⁽⁶⁾ coil options

Motor Power (kW)	Auxiliary Contacts	AC Control Reference	Unit MRP [₹]	
			F7 (110V)	M7 (220V)
3	1 NC	LC2K0601*	6095	6095
	1 NO	LC2K0610*	6095	6095
5.5	1 NC	LC2K0901*	6505	6505
	1 NO	LC2K0910*	6505	6505
7.5	1 NC	LC2K1201*	6705	6705
	1 NO	LC2K1210*	6705	6705
10	1 NC	LC2K1601*	9005	9005
	1 NO	LC2K1610*	7485	9005

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

(6) For current rating and ref please contact Customer Care

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Accessories - K Model

Description	Mounting	Contacts	Reference	Unit MRP [₹]
Auxiliary contact block	Front	2NC	LA1KN02	1005
	Front	1NO + 1NC	LA1KN11 ☒	920
	Front	2NO	LA1KN20	1005
	Front	4NC	LA1KN04	1550
	Front	1NO + 3NC	LA1KN13	1550
	Front	2NO + 2NC	LA1KN22 ☒	1550
	Front	3NO + 1NC	LA1KN31	1550
	Front	4NO	LA1KN40	1550

Description	Control Voltage	Range	Reference	Unit MRP [₹]
On Delay Electronic Timer	24..48 V AC/DC	1..30S	LA2KT2E	5070
	110..240 V AC	1..30S	LA2KT2U	4845

Description	Coil Voltage	Reference	Unit MRP [₹]
Surge Suppressor - RC Circuit	220..250V AC	LA4KA1U*	1322
Surge Suppressor - Varistor	130..250V AC/DC	LA4KE1UG*	1322
Surge Suppressor - Varistor	50..129V AC/DC	LA4KE1FC*	1322

* Lot size 5

(1) Front mounted with common point changeover contact

TeSys Capacitor Duty Contactor

Capacitor Duty Contactor



Nominal Reactive Power 440V	Auxiliary Contacts	Reference	Unit MRP [₹]	
			F7 (110 V)	M7 (220V)
LC1-D•K - with Damping Resistors & Block of Early Make poles				
12.5 kVar	1NO + 2NC	LC1DFK*	6150	6150
16.7 kVar	1NO + 2NC	LC1DGK*	8635	8635
20 kVar	1 NO + 2 NC	LC1DLK	9700	-
25 kVar	1NO + 2NC	LC1DMK*	10640	10640
32 kVar	1 NO + 2NC	LC1DPK*	23180	23180
40 kVar	1NO + 2NC	LC1DTK*	31930	31930
60 kVar	1NO + 2NC	LC1DWK12*	35945	35945

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code



Instruction Manual
Video for Capacitor
Duty Contactors



Guide for the Design
and Production of LV
Power Factor
Correction Cubicles

For complete information on selection of capacitor switching
please refer to the TeSys catalogue

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Deca

The next-generation TeSys Deca series motor starters offer a reliable and robust solution for a faster machine time-to-market. It has a new modern look & feel and is designed to meet the requirements of Electro domestic applications. Ease of operation and reliability is guaranteed with the new multi-standard screws. Digital customer experience is enhanced with a QR embedded from product to packaging.

TeSys Deca Control Contactors (AC & DC Control)



- Conformance to IEC, UL, CSA
- 5 inbuilt auxiliary contacts, in just 2 variants
- Available with AC (50/60Hz Dual frequency), DC & DC low consumption coil options
- High Operating ambient temperature upto 60 Deg C
- Inbuilt surge suppressor for DC & DC low consumption

No of Poles	AC Control Reference	Unit MRP [₹]				DC Control Reference ⁽⁴⁾	Unit MRP [₹]		
		B7 (24V)	F7 (110V)	M7 (220V)	N7 (415V)		BD (24V)	FD (110V)	MD (220V)
3NO + 2NC	CAD32*	2125	2125	2125	2125	CAD32**	3055	3055	3055
5NO	CAD50*	2125	2125	2125	-	CAD50**	3055	3055	3055

No of Poles	DC low consumption Reference ^{(1) (2) (3)}	Unit MRP [₹]		
		BL (24V)	FL (110V)	ML (220V)
3NO + 2NC	CAD32***	3820	4580	6475
5NO	CAD50***	3820	4580	3820

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

(1) Compatible with PLC outputs

(2) Wide range coil (0.7...1.25Uc), suppressor fitted as standard

(3) 2 pole auxiliary block can be mounted

Power Contactors - Deca Model (3 Pole AC & DC Control)



- Conformance to IEC, UL, CSA
- Available with AC (50/60Hz Dual frequency), DC & DC low consumption coil options
- High Operating ambient temperature, no derating upto 60 Deg C
- Inbuilt 1NO + 1NC auxiliary contacts upto 150A
- High electrical and mechanical life
- Fuse-less Type 2 Co-ordination Charts available
- EverLink® terminal for 40, 50, 65 & 80A contactors
- Inbuilt surge suppressor in DC coil for 9-80A

[Ie] Rated Operational Current AC-1	AC-3 Duty			Auxiliary Contacts	AC Control Reference	Unit MRP [₹]		
	kW	HP	A			M7 (220V)	N7 (415V)	F7 (110V)
25	4	5.5	9	1 NO + 1 NC	LC1D09*	2135	2135	2135
25	5.5	7.5	12	1 NO + 1 NC	LC1D12*	2405	2405	2405
32	9	12.5	18	1 NO + 1 NC	LC1D18*	2790	2790	2790
40	11	15	25	1 NO + 1 NC	LC1D25*	3465	3465	3465
50	15	20	32	1 NO + 1 NC	LC1D32*	6740	6740	6740
50	18.5	25	38	1 NO + 1 NC	LC1D38*	9585	9585	9585
60	22	30	40	1 NO + 1 NC	LC1D40A*	10255	10255	10255
80	25	35	50	1 NO + 1 NC	LC1D50A*	13295	13295	13295
80	37	50	65	1 NO + 1 NC	LC1D65A*	18445	18445	18445
80	37	50	80	1 NO + 1 NC	LC1D80A	23055	23055	23055
125	45	60	80	1 NO + 1 NC	LC1D80*	28505	28505	28505
125	45	60	95	1 NO + 1 NC	LC1D95*	29690	29690	29690
250	59	80	115	1 NO + 1 NC	LC1D115*	38555	38555	38555
250	80	110	150	1 NO + 1 NC	LC1D150*	48195	48195	48195

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Deca

[le] Rated Operational Current AC-1	AC-3 Duty			Auxiliary Contacts	DC Control Reference ⁽¹⁾	Unit MRP [₹]		
	kW	HP	A			BD (24V)	FD (110V)	MD (220V)
25	4	5.5	9	1 NO + 1 NC	LC1D09*	3420	3300	3420
25	5.5	7.5	12	1 NO + 1 NC	LC1D12*	3845	3845	3845
32	9	12.5	18	1 NO + 1 NC	LC1D18*	4735	4575	4735
40	11	15	25	1 NO + 1 NC	LC1D25*	5980	5780	5980
50	15	20	32	1 NO + 1 NC	LC1D32*	12200	11795	12200
50	18.5	25	38	1 NO + 1 NC	LC1D38*	14415	14415	14415
60	22	30	40	1 NO + 1 NC	LC1D40A*	17135	-	-
80	25	35	50	1 NO + 1 NC	LC1D50A*	21505	21505	21505
80	37	50	65	1 NO + 1 NC	LC1D65A*	24390	24390	-
125	45	60	80	1 NO + 1 NC	LC1D80*	33120	33120	33120
125	45	60	95	1 NO + 1 NC	LC1D95*	36300	36300	36300
250	59	80	115	1 NO + 1 NC	LC1D115*	42900	45285	45285
250	80	110	150	1 NO + 1 NC	LC1D150*	51480	54345	54345

For other coil voltage ratings contactors, please contact Customer Care.
* Reference to be completed by adding coil voltage code

TeSys Deca Power Contactors (3 Pole DC Low Consumption)

Now available upto 80A with the TeSys Deca Advanced Low Consumption offer

[le] Rated Operational Current AC1	Motor Power (Long Life) AC3			Auxiliary Contacts	Reference	Unit MRP [₹]	
	kW	HP	A			BL (24V)	EL (48V)
25	4	5.5	9	1 NO + 1 NC	LC1D09****	3720	3720
25	5.5	7.5	12	1 NO + 1 NC	LC1D12****	4165	4165
32	9	12.5	18	1 NO + 1 NC	LC1D18****	6360	6360
40	11	15	25	1 NO + 1 NC	LC1D25****	7750	7750
50	15	20	32	1 NO + 1 NC	LC1D32****	13260	13260

[le] Rated Operational Current AC1	Motor Power (Long Life) AC3			Auxiliary Contacts	Reference	Unit MRP [₹]			
	kW	HP	A			BBE (24V DC)	BNE (24-60V AC/DC)	EHE (48-130V AC/DC)	KUE (100-250V AC/DC)
60	22	30	40	1 NO + 1 NC	LC1D40A#	17135	17135	17135	17135
80	25	35	50	1 NO + 1 NC	LC1D50A#	21505	21505	21505	21505
80	37	50	65	1 NO + 1 NC	LC1D65A#	24390	24390	24390	24390
80	37	50	80	1 NO + 1 NC	LC1D80A#	29600	29600	29600	29600

For other coil voltage ratings contactors, please contact Customer Care.
* Reference to be completed by adding coil voltage code

TeSys Deca Power Contactors (4 Pole AC & DC Control)



- Conformance to IEC, UL, CSA
- Available with AC (50/60Hz Dual frequency), DC & DC low consumption⁽¹⁾ coil options
- High Operating ambient temperature, no derating upto 60 deg C

[le] Rated Operational Current AC1	Poles Composition	AC control Reference	Unit MRP [₹] M7 (220V)	DC control Reference	Unit MRP [₹]		
					BD (24V)	FD (110V)	MD (220V)
20	4NO	-	-	LC1DT20**	4080	4080	4080
	2NO+2NC	-	-	LC1D098**	4445	4445	4445
25	4NO	-	-	LC1DT25**	4905	4905	4905
	2NO+2NC	-	-	LC1D128**	6400	6400	6400
32	4NO	-	-	LC1DT32**	5390	9140	6460
	2NO+2NC	-	-	LC1D188**	7290	8725	7290
40	4NO	-	-	LC1DT40**	8450	8450	8450
	2NO+2NC	-	-	LC1D258**	11140	11140	11140
60	4NO	-	-	LC1DT60A#	16910	20260	20260
	2NO+2NC	-	-	LP1D40008**	22220	26630	22220
80	4NO	-	-	LC1DT80A#	25225	25225	-
	2NO+2NC	-	-	LP1D65008**	29875	29875	-
125	4NO	-	-	LP1D80004**	32360	38770	-
	2NO+2NC	-	-	LP1D80008**	37335	44730	37335
250	4NO	LC1D1150046*	43135	LC1D1150046**	47920	47920	-

Note: Please contact Customer Care for 4 Pole AC coil contactor details

⁽¹⁾ For current rating and ref please contact Customer Care

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



TeSys Deca Advanced

The Revolutionary Electronic Coil Contactor



Complete range in 4 frame sizes:

09-12-18A

25-32-38A

40-50-65-80A

115-150A **NEW**

 -80%

Up to 80% less energy consumption than a traditional electromechanical motor starter

10X Reduction
in references

Only 3 references to cover the complete voltage range for AC and DC

 -35%

Highest currents in smallest size, e.g.

PLC Compatible

Direct connection to a PLC without the need for an interposing relay

SEMIF47

High uptime thanks to wide band coil with high resistance to voltage surges/SEMIF47 conform




Scan to see TeSys
Deca Advanced under
voltage performance.

TeSys Control

Deca Advanced Contactors

Introduction

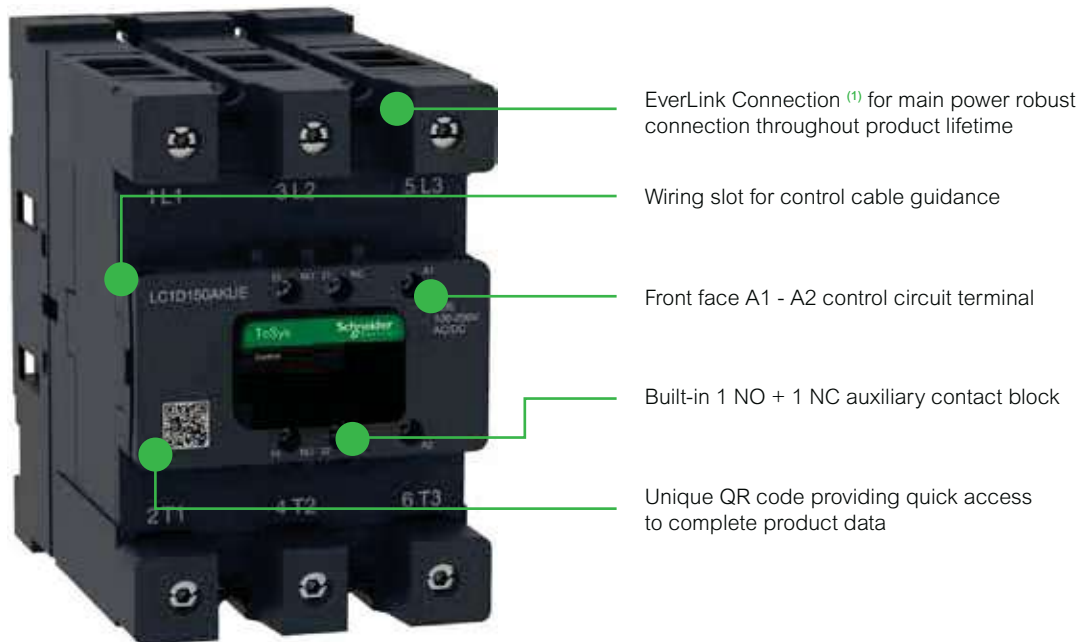

TeSys Deca Advanced contactors



9...18 A



25...38 A



40...80 A



115...150 A

Power & switch

- 3 or 4 power poles
- 9 to 150 A (AC-3/AC-3e)
- 25 to 200 A (AC-1)
- Embedded 1 NO + 1 NC auxiliary contacts
- Patent EverLink main power terminals ⁽¹⁾

Efficient design

- Low consumption coils
- High rating within compact size
- Ready for IE3/IE4 high efficiency motor

Remote control

- 24V DC ⁽²⁾, 24...60 V, 48...130 V 100...250 V, 200...500 V AC/DC coils
- PLC direct control available ⁽³⁾
- High resistance to voltage fluctuation
- Embedded surge suppressor

Standards & Certifications

- Multiple standards
- International certifications

⁽¹⁾ for LC1D40A...150A



⁽²⁾ BBE coil for LC1D40A...80A for PLC direct input

⁽³⁾ BNE coil for LC1D09...38, BBE coil for LC1D40 A...80A

TeSys Control

Deca Advanced Contactors

TeSys Deca Advanced Contactors

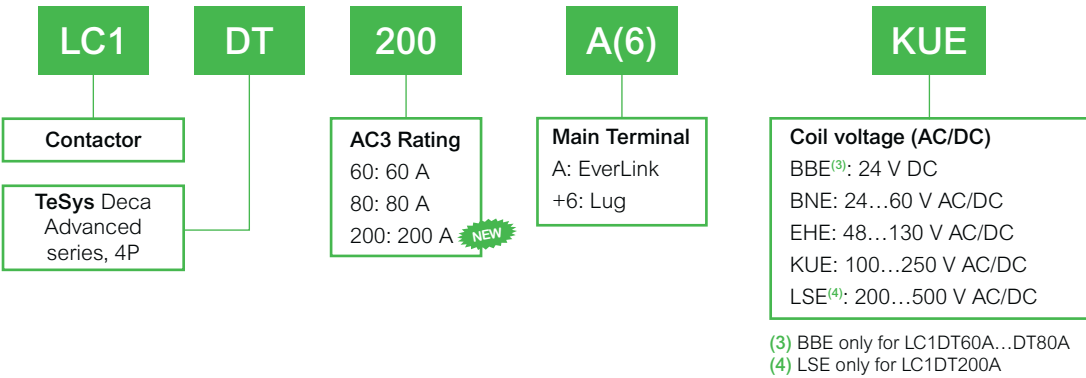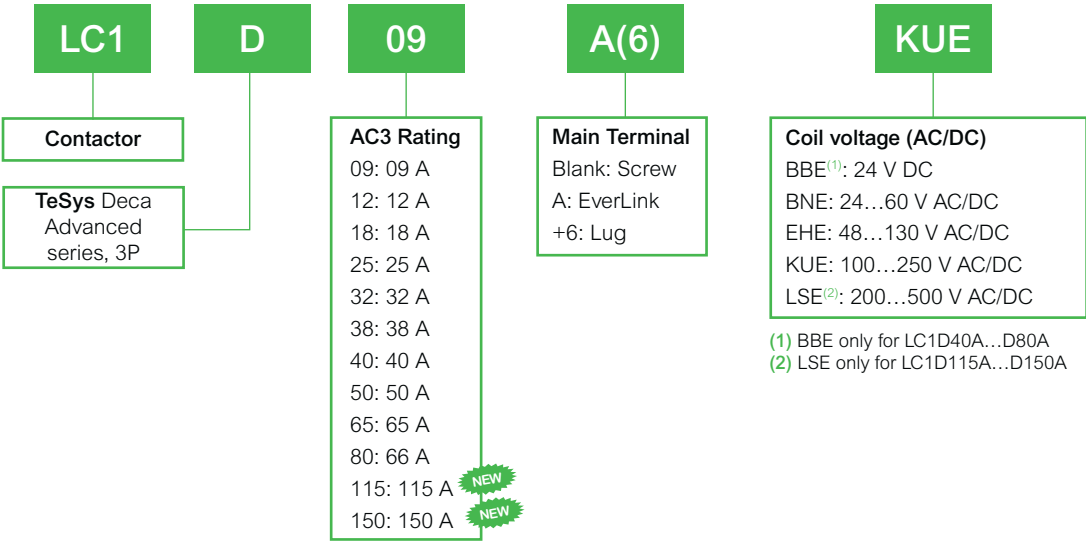

TeSys Control

Deca Advanced Contactors

TeSys Deca Advanced Contactor (3 Pole AC/DC Universal Coil)



- Universal AC/DC coil from 24 - 250V
- Special low consumption offer from 40-80A
- Fuseless Type 2 Co-ordination charts available

The Revolutionary Electronic Coil Contactor

[le] Rated Operational Current AC1	AC3 Duty (Long Life)			Auxiliary Contacts	Reference	Unit MRP [₹]			
	kW	HP	A			BNE (24-60V AC/DC)	EHE (48-130V AC/DC)	KUE (100-250V AC/DC)	LSE (200-250V AC/DC)
25	4	5.5	9	1 NO + 1 NC	LC1D09	4420	4420	4420	-
25	5.5	7.5	12	1 NO + 1 NC	LC1D12	4580	4580	4580	-
32	9	12.5	18	1 NO + 1 NC	LC1D18	6045	6045	6045	-
40	11	15	25	1 NO + 1 NC	LC1D25	7215	7215	7215	-
50	15	20	32	1 NO + 1 NC	LC1D32	14660	14660	14660	-
50	18.5	25	38	1 NO + 1 NC	LC1D38	15820	18790	15820	-
60	22	30	40	1 NO + 1 NC	LC1D40A	17135	17135	17135	-
80	25	35	50	1 NO + 1 NC	LC1D50A	21505	21505	21505	-
80	37	50	65	1 NO + 1 NC	LC1D65A	24390	24390	24390	-
60	37	50	80	1 NO + 1 NC	LC1D80A	29600	29600	29600	-
80	22	30	40	1 NO + 1 NC	LC1D40A	17135	17135	17135	-
80	25	35	50	1 NO + 1 NC	LC1D50A	21505	21505	21505	-
80	37	50	65	1 NO + 1 NC	LC1D65A	24390	24390	24390	-
250	59	80	115	1 NO + 1 NC	LC1D115A NEW	38035	39695	39445	40610
250	80	110	150	1 NO + 1 NC	LC1D150A NEW	40445	41610	41245	42415

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

TeSys Deca Advanced Power Contactors (4 Pole AC & DC Control)

[le] Rated Operational Current AC-1	Poles Composition	Auxiliary Contacts	AC & DC Control Reference	BBE (24V DC only)	Unit MRP [₹]			
					BNE (24-60V AC/DC)	EHE (48-130V AC/DC)	KUE (100-250V AC/DC)	LSE (200-250V AC/DC)
60	4NO	1NO + 1NC	LC1DT60A	16910	16910	16910	16910	-
80	4NO	1NO + 1NC	LC1DT80A	25225	25225	25225	25225	-
200	4NO	1NO + 1NC	LC1DT200A NEW	-	47305	50545	50185	52825

Coil Voltage Code

Type	Voltage	24-60V AC/DC	48-130V AC/DC	100-250V AC/DC	200-250V AC/DC
AC/DC*	LC1D09 - D38, LC1D40A - 80A, LC1DT60A - 80A	BNE	EHE	KUE	
	LC1D115A - 150A NEW	BNE	EHE	KUE	LSE
24V DC Low Consumption*	LC1D40A - 80A, LC1DT60A - 80A	BBE (24V DC only)	-	-	

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code



Check the features
of the TeSys Deca
Advanced

Please contact Customer Care Center for Stockable and Non stockable status of references.


☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

Deca Advanced Contactors

Introduction

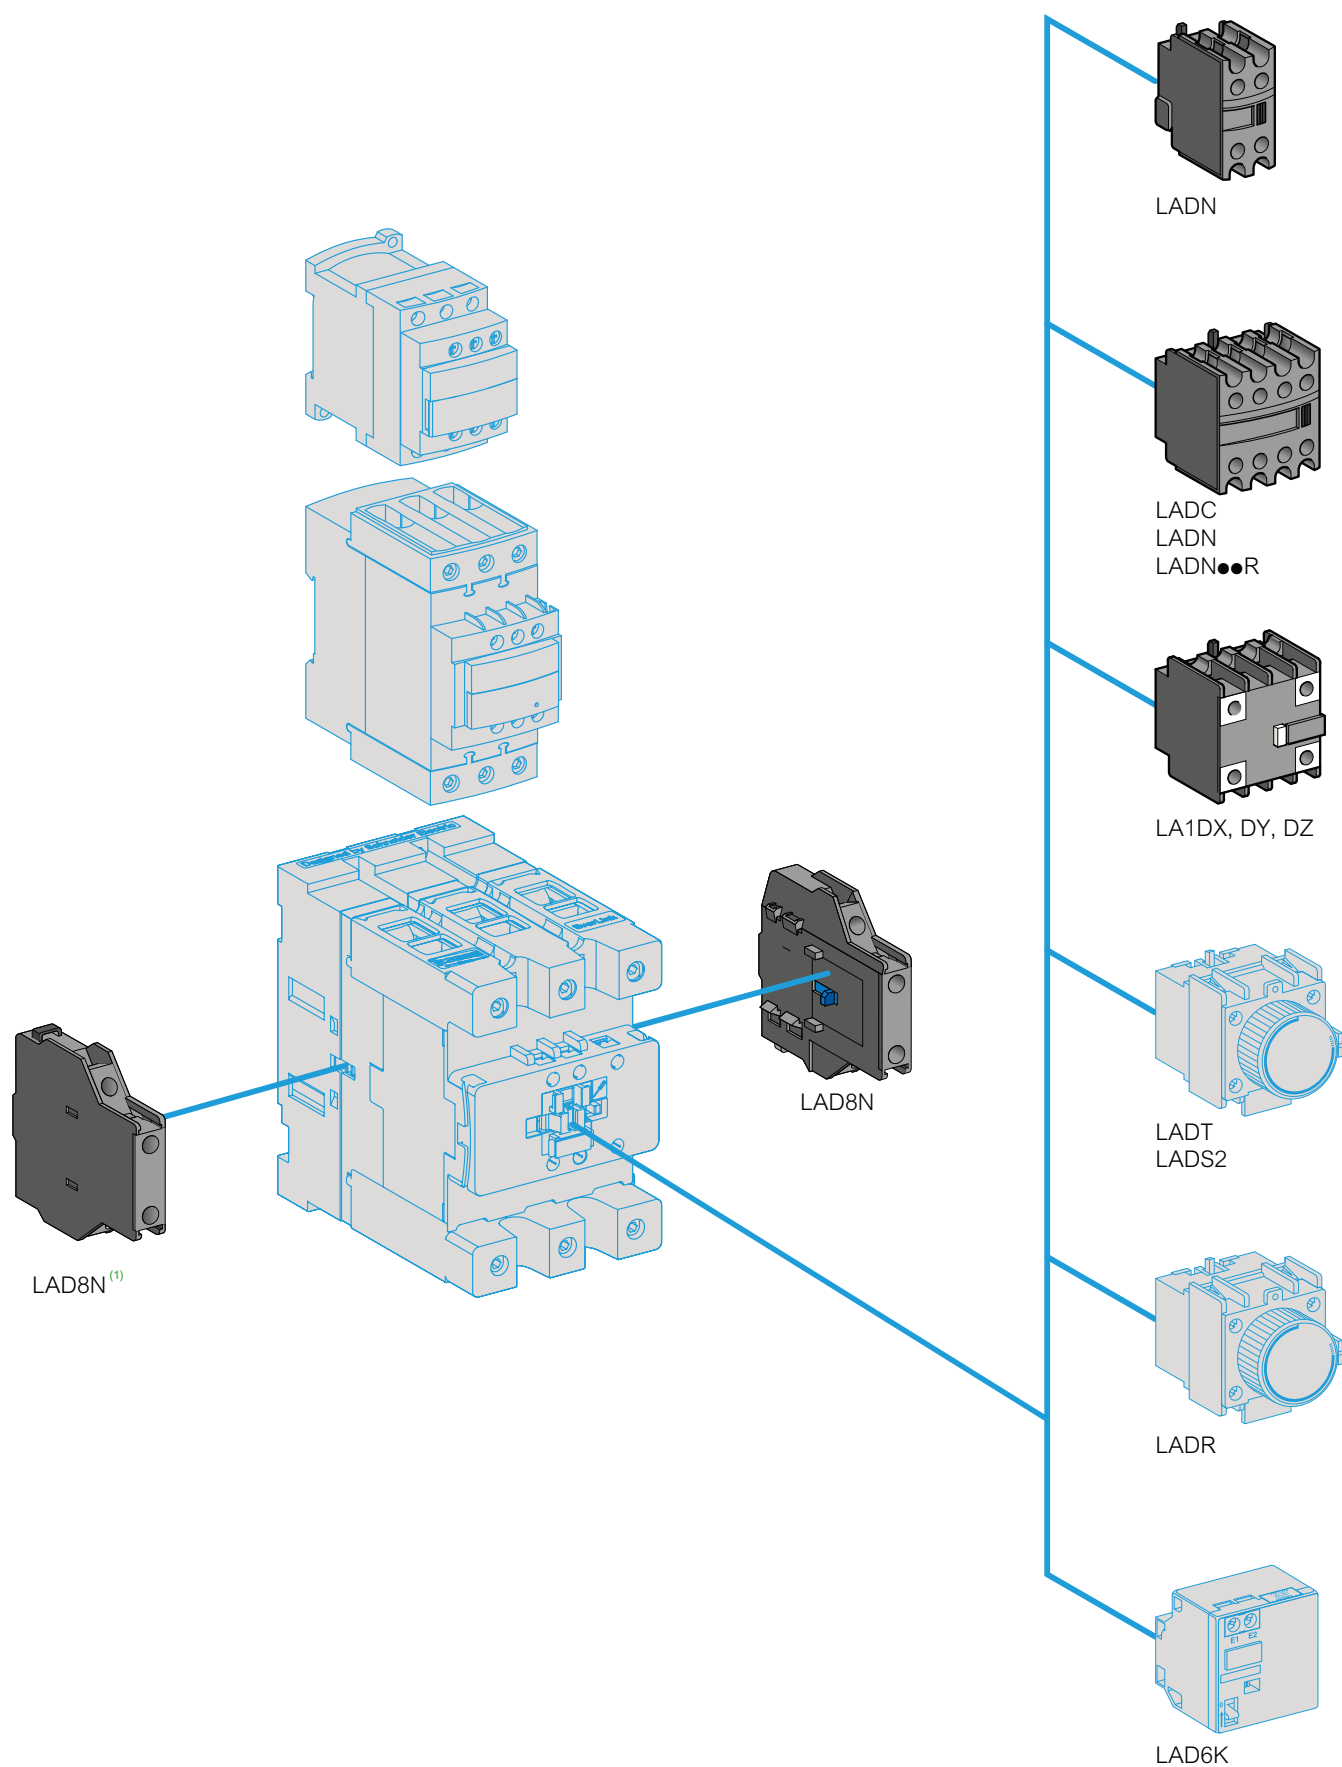

(1) No left side mounting on Deca Advanced contactors up to LC1D38.

TeSys Control

TeSys Deca

Description	For use with	Reference	Unit MRP [₹]
Power connection accessories			
Terminal block	For supply to one or more GV2 G busbar sets	GV1G09	2700
Set of 63A busbars for parallelling of contactors	2 contactors LC1D09...D18 or D25...D38	GV2G245	2635
	4 contactors LC1D09...D18 or D25...D38	GV2G445	4145
Set of 115A busbars for parallelling of contactors	2 contactors LC1D40A...D80A	GV3G264	4735
	3 contactors LC1D40A...D80A	GV3G364 ⁽¹⁾	2530
Set of S-shape busbars	For circuit breakers GV3P** & GV3L** and contactors LC1 D40A...D65A	GV3S	1895


**Not applicable for GV3P/GV3L 73A and 80A



GV2G245



GV1G09




GV3S

Description	For use with	Reference	Unit MRP [₹]
Mechanical interlock	LC1D09 to D38(1)	LAD9V2	950
	LC1D40A to D65A(1)	LAD4CM	1925
	LC1D80 and D95 (for AC control voltage)	LA9D4002	4225
	LC1D80 and D95 (for DC control voltage)(2)	LA9D8002	6290
	LC1D115 and D150(2)	LA9D11502	6375

(1) With this set of busbars, any one contactor can be supplied directly by its EverLink® double cage power terminal block. The other two contactors are supplied by the busbar set. The 115A limitation is therefore applied to these two contactors.


(2) With electrical interlock

Description	For use with	Reference	Unit MRP [₹]
Power Connection for Reversing			
Kit Comprising :	LC1D09 to D38	LAD9V5	790
1. A set of parallel bars	LC1D09 to D38	LAD9V6	985
2. A set of reverser bars.	LC1D40A to D80A	LA9D65A69	4100
	LC1D80 and D95 (for AC control voltage)	LA9D8069	8775
	LC1D80 and D95 (for DC control voltage)	LA9D8069	8775
	LC1D115 and D150	LA9D11569	14600




LA9 D8069

Description	For use with	Reference	Unit MRP [₹]
Reversing Kit			
Kit Comprising :			
1. A mechanical interlock LAD 9V2 with electrical interlocking LAD 9V1	LC1D09 to D38	LAD9R1V	1970
2. A set of power connections LAD 9V5 (parallel) and LAD 9V6 (reversing).			
Kit Comprising :			
1. A mechanical interlock LAD 9V2 without electrical interlocking	LC1D09 to D38	LAD9R1	1975
2. A set of power connections LAD 9V5 (parallel) and LAD 9V6 (reversing).			
Kit Comprising :			
1. A mechanical interlock LAD 4CM	LC1D40A to D80A	LAD9R3	4680
2. A set of power connections LA9 D65A69.			



LAD9R1



LAD9R3

Description	For use with	Reference	Unit MRP [₹]
Star Delta Kit			
Time delay contact block LAD S2 (LC1D09...D80),	LC1D09 and D12	LAD91217	7405
Power circuit connections (LC1D09...D80),	LC1D18 to D32	LAD93217	9520
Hardware required for fixing the contactors onto the mounting plate (LC1D80)	LC1D40A and D50A	LAD9SD3	19240
	LC1D80	LA9D8017	21365



LAD91217



LAD9SD3



LA9D8017

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Deca

Description	Time Delay Range	Timer Type	Reference	Unit MRP [₹]
On delay timer ^{(1) (2)}	15...30 s	on delay	LA4DT2U	7165
On delay timer ^{(1) (2)}	0.1...2 s	on delay	LA4DT0U	7165
On delay timer ^{(1) (2)}	25...500 s	on delay	LA4DFB	6600
Relay interface module - 24V DC ^{(1) (2)}	-	-	LA4DT4U	8025

(1) For LC1 D09...38A (3P, AC coils only) add mounting adaptor LAD4BB and for LC1 D40A...65A (3P, AC coils only), add mounting adaptor LAD4BB3.

(2) For LC1D80...150 (3P), direct mounting, for 100-250V AC Coils only.

Description	For use with	Reference	Unit MRP [₹]				
			B (24V) (AC/DC)	E (42/48V) (AC/DC)	F (110/127V) (AC/DC)	M (220/240V) (AC/DC)	Q (380/415V) (AC/DC)
TeSys Deca Model Mechanical Latch Blocks							
Front, Clip-on	LC1D09...D38 (a or c)	LAD6K10*	8610	8610	8610	8610	-
	LC1DT20...DT40 (a or c)						
	LC1D40A...D65A (3P a or c)						
	LC1DT60A and DT80A (4P a or c)						
	LC1D80...D150 (3P a)	LA6DK20*	8985	10080	10080	8985	14160
	LC1D80 and D115 (3 P c)						
	LC1D80 (4 P a)						
	LC1D80 and D115 (4 P a)						
LP1D80 and LC1D115 (4 P c)							

* Reference to be completed by adding coil voltage code and recommended to check availability with Customer Care team

Spare Coils TeSys Deca Model

Product Compatibility	Reference
AC Coils	
CAD, LC1-D09...D38, DT20..40	LXD1*
LC1D40A, D50A, D65A & LC1DT60A, DT80A	LXD3*
D80 & D95 (3P & 4P)	LX1D6*
LC1-D115, D150	LX1D8*
DC Coils	
LC1-D80-D95	LX4D7**
LC1-D115, D150	LX4D8**

* Reference to be completed by adding coil voltage code and recommended to check availability with Customer Care team

Coil Voltage Code

Type	Voltage (V)	24	110	220	415
AC*	CAD, LC1-D09...D38, DT20..40, LC1 - D150, LC1D40A, D50A, D65A & LC1DT60A, DT80A, LC1D150 LC1D80, D95, D115	B7	F7	M7	N7

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Deca

Accessories

Description	For use With	Contacts	Reference	Unit MRP [₹]
Add On Blocks				
Additional instantaneous auxiliary contact blocks	LC1D09 ...LC1D150*	Front Mounted 1NO + 1NC	LADN11	635
		Front Mounted 2NO	LADN20 ☒	635
		Front Mounted 2NC	LADN02	1020
		Front Mounted 2NO + 2NC	LADN22 ☒	1155
		Front Mounted 4NC	LADN04	1685
		Front Mounted 4NO	LADN40 ☒	1155
		Front Mounted 1NO + 3NC	LADN13	1155
		Front Mounted 3NO + 1NC	LADN31 ☒	1155
	LC1D80...LC1D95	Front Mounted 1NO	LADN10	565
		Front Mounted 1NC	LADN01	565

Description		Contacts		Reference	Unit MRP [₹]
Add On Blocks					
Additional instantaneous auxiliary contact blocks	Side Mounted ⁽¹⁾	1NO + 1NC		LAD8N11	2420
	Side Mounted ⁽¹⁾	2NO		LAD8N20	2420
Pneumatic timer blocks front mounted	ON delay	1NO + 1NC	0.1..3s	LADT0	4580
	ON delay	1NO + 1NC	0.1..30s	LADT2	4580
	ON delay	1NO + 1NC	10..180s	LADT4	4580
	ON delay	1NO + 1NC	1..30s (2)	LADS2 	4885
	OFF delay	1NO + 1NC	0.1 ..3s	LADR0	4580
	OFF delay	1NO + 1NC	0.1 ..30s	LADR2 	4580
	OFF delay	1NO + 1NC	10..180s	LADR4	4580

(1) Suitable for mounting on TeSys Deca range AC Coil Contactors and Control Relays only

(2) With Switching time of 40 ms between opening of the NC contact and closing of the NO contact recommended for Star - Delta Starters

Accessories compatibility

Contactors		Instantaneous Auxiliary Contacts				Time delay Front Mounted	
Type	Number of Poles and Size	Side mounted	Front mounted				
			1 contact	2 contact	4 contacts		
AC & AC/DC	3P LC1D09...D38	1 on LH side	and	-	1 or 1	or 1	
AC & AC/DC	3P LC1D40A...D80A	1 on LH or 1 on RH side	and	-	1 or 1	or 1	
AC & AC/DC	3P LC1D80 and D95A (50/60 Hz)	1 on each side	or	2 and 1	or 1	or 1	
AC & AC/DC	3P LC1D80 and D95A (50 or 60 Hz)	1 on each side	and	2 and 2	or 1	or 1	
AC & AC/DC	3P LC1D115 and D150	1 on LH side	and	-	1 or 1	or 1	
AC & AC/DC	4P LC1DT20...DT40	1 on LH side	and	-	1 or 1	or 1	
AC & AC/DC	4P LC1DT60A and DT80A	1 on LH or 1 on RH side	and	-	1 or 1	or 1	
AC & AC/DC	4P LC1D40008, D65008 and D80	1 on each side	or	1 or 1	or 1	or 1	
AC & AC/DC	4P LC1D115	1 on each side	and	1 or 1	or 1	or 1	
DC	3P LC1D09...D38	-	-	1	or 1	or 1	
DC	3P LC1D40A...D80A	-	-	1	or 1	or 1	
DC	3P LC1D80 and D95	-	1	or 1	or 1	or 1	
DC	3P LC1D115 and D150	1 on LH side	and	-	1 or 1	or 1	
DC	4P LC1DT20...DT40	-	-	1	or 1	or 1	
DC	4P LC1DT60A and DT80A	-	-	1	or 1	or 1	
DC	4P LC1D40008, D65008 and D80	-	2	and 1	or 1	or 1	
DC	4P LC1D115	1 on each side	-	and 1	or 1	or 1	
LC ⁽³⁾	3P LC1D09...D38	-	-	1	-	-	
LC ⁽³⁾	3P LC1DT20...DT40	-	-	1	-	-	

(3) LC : Low consumption

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Accessories

Description	For use with	Reference	Unit MRP [€]
For Contactor D115/150			
Contacts set - 3P	LC1D115	LA5D1158031	28205
Contacts set - 3P	LC1D150	LA5D150803	29240
Contacts set - 4P	LC1D1150046	LA5D115804	38875

Product Compatibility	Fixing	Control Circuit Voltage	Suppressor Type	Reference	Unit MRP [€]
Coil Suppressor Modules					
LC1D12...D25 (4P)	Screw	110...240V AC	RC Circuit AC	LA4DA1U	2210
	Screw	12...250V DC	Diode DC	LA4DC1U	2475
LC1D09...D38, LC2D09...D38, LC1DT20...DT40, LC2DT20...DT40 (3P)	Screw	24...48V AC	Varistor AC/DC	LAD4VE	2145
	Screw	24...48V AC 400Hz	RC Circuit AC	LAD4RCE	2145
	Screw	50...127V AC 200Hz	RC Circuit AC	LAD4RCG	1935
CAD	Screw	110...240V AC 100Hz	RC Circuit AC	LAD4RCU 	2145
	Screw	110...250V AC	Varistor AC/DC	LAD4VU	2145
LC1D80, LC1D95, LC2D80, LC2D95 (3P) LC2D80 (4P), LC1D40008, LC1D65008	Screw	24...250V DC	Diode DC	LA4DC3U	2210
	Screw	110...250V AC	Varistor AC/DC	LA4DE2U	2110
	Screw	24...48V AC 400Hz	RC Circuit AC	LA4DA2E	2110
	Screw	50...127V AC 200Hz	RC Circuit AC	LA4DA2G	3330
	Screw	110...240V AC 100Hz	RC Circuit AC	LA4DA2U	2210
	Screw	380...415V AC 150Hz	RC Circuit AC	LA4DA2N	3330
	Screw	24...48V DC	Varistor AC/DC	LA4DE3E	2210

Please contact Customer Care Center for Stockable and Non stockable status of references.

 **NORMAL STOCK ITEMS**

W.E.F. July 15th, 2025


TeSys Control

TeSys Deca

Accessories

TeSys Deca auxiliary contact blocks for use in harsh industrial environment

Product references: coding principle

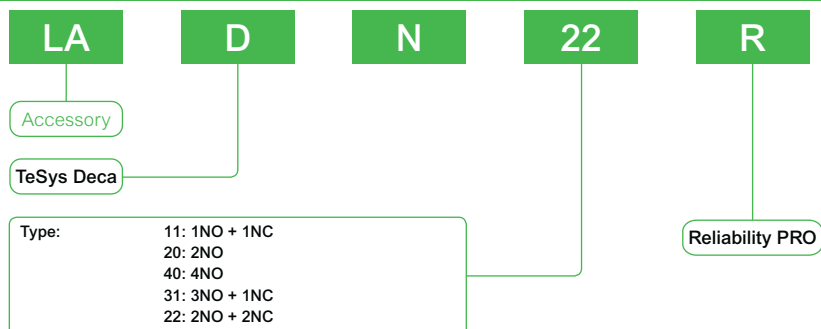

Note: There are differences in NO/NC position between LADN●●R and LADN●●. Please refer to page A1/42 for wiring diagram details. This auxiliary module only supports the installation on contactors with standard power consumption.

Product core values

Dustproof, Ultra-fine grain silver contacts, Improved Reliability, 17 V/1 mA

New upgrade, with innovative design



20% stability increased on contacts

Improves contact reliability between mobile and static contacts



Fully sealed design benefits on reduced dust access

Comprehensive blocking of dust and external pollution

5X granularity refinement on silver alloy

Innovative binary alloy refinement process provides precise conduction for each operation

10⁻⁸ level on reliability

Capacity 17 V/1 mA



Target industries and applications

- For elevator, textile machinery and other harsh industrial applications
- For low voltage and low current high sensitive applications

Product variants:



LADN11R



LADN20R



LADN22R



LADN31R



LADN40R

LADN●●R for harsh environment 17 V/1 mA

Description	Reference	Unit MRP [€]
Auxiliary module 1NO + 1NC, screw terminals	LADN11R	1025
Auxiliary module 2NO, screw terminals	LADN20R	1035
Auxiliary module 2NO + 2NC, screw terminals	LADN22R	1225
Auxiliary module 3NO + 1NC, screw terminals	LADN31R	1225
Auxiliary module 4NO, screw terminals	LADN40R	1240

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Deca

Modular marking system simplifies identification of standard contactors in the control panel to enhance visibility of the safety chain

Simple, customisable modular marking system

Standard TeSys Deca contactors

Easy-to-attach covers:



Auxiliary blocks with safety chain identification also available for more contact points:



Flexibility to customise contactors included in the safety chain during panel building



Simpler and faster maintenance with 100% visibility



Safety covers and auxiliary blocks prevent screwdriver contact with poles

Standard TeSys Ultra motor starters

Translucent labels to identify safety-chain devices:



Complete safety-chain identification system

TeSys Deca range

Retrofit contactor safety covers



LAD9ET1S
9A upto 65A



LAD9ET3S
80A to 95A



LAD9ET4S
110A to 150A



LADN22S
2NO + 2NC

Also available for CAD32/CAD50

TeSys Ultra range

Retrofit identification label



LU9ET1S

Built in Safety

TeSys Ultra motor starters are certified according to IEC 60947-4-1 for safety applications thanks to integrated mirror contact

Description	For use with	Reference	Unit MRP [₹]
Red Cover (For safety chain indication)	LC1D09...D65A and DT20 .. DT80A	LAD9ET1S	910
Auxiliary Contact block with red front face- for safety chain indication	2NO + 2NC	LADN22S	1300

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



TeSys Giga - Future Ready

A New Generation Series with Digital Innovation

TeSys Giga is new range of high-power contactors that supports industry requirements with process performance monitoring through data networks and online expert services.

Optimized Predictive Maintenance through-

- Continuous local and remote monitoring of contact wear
- Replaceable contacts (when necessary), facilitated by diagnostic visual indicator.

Unique Design-

- Innovative design and feature with compact size
- Ergonomic design & Flexibility in connections.
- Embedded auxiliary contact blocks
- Wideband electronic coils



TeSys Control

TeSys Giga

TeSys Giga High Power Contactors

Both "Standard" & "Advanced" versions available in 3 sizes, covering several ratings



Standard Version

Power & control

- 3 or 4 power poles
- 115 to 800A (AC-3)
- 200 to 1050A (AC-1)
- Embedded 1 NO + 1 NC auxiliary contacts
- Push-in type terminals for coils & control

Remote control

- 48-130V, 100-250V AC/DC coils
- Wide voltage range coils (direct coil control)
- Embedded surge-suppressor

Diagnostic

- Embedded wear diagnostic
- Embedded control voltages diagnostic
- Self diagnosis function
- Local alarm signaling (LED)



Advanced Version

Advanced diagnostic features along with standard version -

Diagnostic

- Remote wear diagnostic signaling kit (accessory)

Mounting

- Cable memory' adapter enables maintenance without removing power cables and busbar connections.

Remote control

- 24-48 V, 200-500 V AC/DC coils
- Digital control input (PLC output digital coil control)



Interlock location, with knock-out cover

On/Off switch for PLC input

Push-in type control terminals enabling quick wiring and assembly

Diagnosis LED for contact wear & voltage abnormality

Built-in 1 NO + 1 NC auxiliary contact block

Unique QR code providing quick access to complete product data

Mechanical indicator for contactor open and closed status

TeSys Control

TeSys Giga

Quick & Easy Replacement of TeSys F with TeSys Giga Contactors with Retrofit Bases




Description	Reference	Unit MRP [₹]
Substitutes LC1F115-225 with LC1G115-225	LA9GRFB1	On Request
Substitutes LC1F265-500 with LC1G265-500	LA9GRFB2	On Request
Substitutes LC1F630-800 with LC1G630-800	LA9GRFB3	On Request




- Suitable for 3 pole contactors
- The bases come in two frame sizes.
- Upgrade your system with the new range of contactors in just 3 simple steps:

1




Remove
TeSys F contactor

2



Install
Retrofit base

3



Mount TeSys Giga Contactor
on Retrofit base

TeSys Giga Power Contactors (3 Pole AC/DC)

[Ie] Rated Operational Current AC-1	Motor Power (Long Life) AC-3		Standard version Reference	Unit MRP [₹]	
	kW (@415V)	A		EHEN (48-130 V)	KUEN (100-250 V)
250	55	115	LC1G115****	32935	34065
275	75	150	LC1G150****	43440	43440
305	90	185	LC1G185****	53835	53835
330	110	225	LC1G225****	57930	57930
385	132	265	LC1G265****	71205	71205
440	160	330	LC1G330****	86105	86105
550	200	400	LC1G400****	104065	104065
700	250	500	LC1G500****	144365	144365
1050	375	630	LC1G630****	On Request	On Request
1050	450	800	LC1G800****	On Request	On Request

TeSys Giga Power Contactors (4 Pole AC/DC)

[Ie] Rated Operational Current AC-1	Power Pole Composition	Standard version Reference	Unit MRP [₹]	
			EHEN (48-130 V)	KUEN (100-250 V)
250	4 NO	LC1G1154****	56030	56030
275	4 NO	LC1G1504****	66665	66665
305	4 NO	LC1G1854****	83300	83300
330	4 NO	LC1G2254****	97850	97850
385	4 NO	LC1G2654****	109400	109400
440	4 NO	LC1G3304****	127315	127315
550	4 NO	LC1G4004****	158225	158225
700	4 NO	LC1G5004****	233175	233175
1050	4 NO	LC1G6304****	On Request	On Request
1050	4 NO	LC1G8004****	On Request	On Request

Note:

For ordering advanced version replace **N** with **A** in reference as EHEN/KUEN → EHEA/KUEA respectively.

Example: LC1G1154 EHEN → LC1G1154 EHEA.

For other coil voltage ratings contactors, please contact Customer Care.

* Reference to be completed by adding coil voltage code

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Giga

Giga High power contactors – Power wiring accessories

Product references

Power Terminals

Spreader Kits



Description	Suitable for	Compatible with Contactors	Increase of Pole Pitch	Quantity Set of	Reference	Unit MRP [₹]
Spreader kits	3P	LC1G115...LC1G225	35 to 45 mm	3	LA9G3611	On Request
	3P	LC1G265...LC1G500	45 to 70 mm	3	LA9G3612	On Request
	4P	LC1G115...LC1G225	35 to 45 mm	4	LA9G4611	On Request
	4P	LC1G265...LC1G500	45 to 70 mm	4	LA9G4612	On Request

Terminal extensions for larger power connections



Description	Suitable for	Compatible with Contactors	Power Connection Size	Quantity Set of	Reference	Unit MRP [₹]
Terminal connections	3P	LC1G400...LC1G500	50 mm width	3	LA9G3613	On Request
	3P	LC1G630...LC1G800	80 mm width	3	LA9G3614	On Request
	4P	LC1G400...LC1G500	50 mm width	4	LA9G4613	On Request
	4P	LC1G630...LC1G800	80 mm width	4	LA9G4614	On Request

Power Terminal Accessories

Phase Separators



Description	Suitable for	Compatible with Contactors	Quantity Set of	Reference	Unit MRP [₹]
Phase separators ⁽¹⁾	3P	LC1G115...LC1G800	2	LA9G3801	On Request
	4P	LC1G115...LC1G800	3	LA9G4801	On Request
	3P – with 50/80 mm spreaders	LC1G400...LC1G800	2	LA9G3803 ⁽²⁾	On Request
	4P – with 50/80 mm spreaders	LC1G400...LC1G800	3	LA9G4803 ⁽³⁾	On Request

(1) Either phase separators or terminal shrouds can only be mounted. Phase separators or terminal shrouds are mandatory for operational voltage, $U_e \geq 690$ V.

(2) To be used with LA9G3613 and LA9G3614.

(3) To be used with LA9G4613 and LA9G4614.

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

TeSys Giga

Accessories

Description	Terminal Type	Position	Contacts	Reference	Unit MRP [₹]
Add On Blocks	Push In				
Auxiliary contact module	1st left or 1st right	Side Mounted ⁽¹⁾	1 NO+1NC	LAG8N113P	1575
	1st left or 1st right	Side Mounted	2 NO	LAG8N203P	2035
	2nd left or right	Side Mounted	1 NO+1NC	LAG8N113	1575
	2nd left or right	Side Mounted	2 NO	LAG8N203	2035

(1) Always supplied with TeSys Giga LC1G contactors, fitted to the right side lateral face.

Accessories

For Use With Contactor	Reference	Unit MRP [₹]
Mechanical interlock between contactors ⁽¹⁾		
Between Identical contactor frames	LA9G970	2860
Between LC1G(265-500) and LC1G(185-225)	LA9G971	2860
LC1G630 to LC1G800 and LC1G265 to LC1G500	LA9G972	On Request*

(1) Maximum 3 auxiliary contacts can be installed between 2 contactors with mechanical interlock kit.

Spare Control Module



- Wide band electronic control
- 24 V...500 V 50/60 Hz or DC control input
- Advanced and standard versions
- Accessible from the front for easy and quick replacement

Pole Composition	Control modules for Standard contactors	Reference	Unit MRP [₹]	
			EHEN (48-130V)	KUEN (100-250V)
3-Pole	LC1G115...LC1G225	LX1G3Q*	On Request	On Request
3-Pole	LC1G265...LC1G330	LX1G3R*	On Request	On Request
3-Pole	LC1G400...LC1G500	LX1G3S*	On Request	On Request
3-Pole	LC1G630...LC1G800	LX1G3T*	On Request	On Request
4-Pole	LC1G115...LC1G225	LX1G3Q*	On Request	On Request
4-Pole	LC1G265...LC1G330	LX1G3R*	On Request	On Request
4-Pole	LC1G400...LC1G500	LX1G3S*	On Request	On Request
4-Pole	LC1G630...LC1G800	LX1G3T*	On Request	On Request

For other coil voltage ratings regarding above, please contact Schneider Electric customer care.

* Reference to be completed by adding coil voltage code

Please contact Customer Care Center for Stockable and Non stockable status of references.


☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Protection Range

TeSys has the most rugged and reliable solution to manage motors

Please find a quick range overview below

	TeSys Power		TeSys Protect			TeSys Active		
Feature	Motor Protection Circuit Breakers		Overload Relays	Multi function Relays		TeSys Ultra	TeSys T	TeSys Island
TeSys Range of Products	GV2P, GV4P GV3P, GV2ME	GV4PEM	LR2K, LRD, LR9D, LR9F	LR9G	EOCR			
	 GV2P GV3P GV2ME	 GV4PEM	 LR2K LR9D LRD LR9F	 LR9G	 EOCR	 TeSys Ultra	 TeSys T	 TeSys Island
Short circuit								
Causes of overheating								
Slight overload								
Locked rotor								
Ventilation fault With probes							With Probes	With Probes
Abnormal temperature rise								With Probes
Shaft bearing seizure								
Insulation fault					With CBCT			
Long starting time Adjustable Adjustable		Adjustable			Adjustable	Adjustable	Adjustable	Adjustable
Heavy duty			LR9D only					
Voltage variation (Derived)								
Causes of phase variation								
Phase reversal								
Phase losses								
Phase imbalance								
Earth fault								
Historic fault, Pre-Alarming				Possible Pre alarm				



Protection Relays for Motor Safety

Providing motor safety tailored to your needs



TeSys Protect

TeSys K, TeSys Deca, TeSys F, TeSys Giga

Thermal Overload Relays - TeSys K Series (Direct Mounting)



- Conformance to IEC, UL, CSA, CE
- Range : 0.1A to 16A
- Direct & Independent mounting
- Trip class 10A

Thermal Protection Adjustment	For Use With	For Use With	Unit MRP [₹]
0.11...0.16		LR2K0301	2860
0.16...0.23		LR2K0302	2860
0.23...0.36		LR2K0303	2860
0.36...0.54		LR2K0304	2860
0.54...0.8		LR2K0305	2860
0.8...1.2		LR2K0306	2860
1.2...1.8	LC1K, LP1K, LP4K, LP2K, LC2K	LR2K0307	2860
1.8...2.6		LR2K0308	2860
2.6...3.7		LR2K0310	2860
3.7...5.5		LR2K0312	2860
5.5...8		LR2K0314	2860
8...11.5		LR2K0316	2860
10...14		LR2K0321	2960
12...16		LR2K0322	2960

*Note: Terminal Block for Clip-on Mounting LA7K0064

Thermal Overload Relays - TeSys Deca Series



- Conformance to IEC, UL, CSA
- Range : 0.1A to 104A
- Higher operating temperature
- Tripping class 10A & 20 available
- Direct mounting on contactor is possible upto 95A

Thermal Protection Adjustment Range	For Use With	Reference*	Unit MRP [₹]
LRD Model (Direct Mounting)			
0.1...0.16		LRD01	2815
0.16...0.25		LRD02	2815
0.25...0.4		LRD03	2815
0.4...0.63		LRD04	2815
0.63...1		LRD05 ✓	2815
1...1.6		LRD06 ✓	2815
1.6...2.5	GV2L03, LE03, LC1D09...LC1D38	LRD07 ✓	2815
2.5...4		LRD08 ✓	2815
4...6		LRD10 ✓	2815
5.5...8		LRD12 ✓	2815
7...10		LRD14 ✓	3155
9...13		LRD16 ✓	3155
12...18		LRD21 ✓	3250
16...24	GV2L22, LC1D25...D38	LRD22 ✓	3250
23...32	LC1D25...LC1D38, LC1D32	LRD32 ✓	5225
30...38	LC1D32, LC1D38	LRD35	5225
23...32	LC1D40A...D65a	LRD332	5790
23...32	LC1D80...LC1D95	LRD3353	5790
30...40	LC1D40A...D65a	LRD340	5790
30...40	LC1D80...LC1D95	LRD3355	5790
37...50	LC1D40A...D65a	LRD350 ✓	7935
37...50	LC1D80...LC1D95	LRD3357	9490
48...65	LC1D40A...D65a	LRD365	10180
62...80	LC1D80A	LRD380	10620
48...65	LC1D80...LC1D95	LRD3359	10180
63...80	LC1D80...LC1D95	LRD3363	11050
80...104	LC1D80, LC1D95	LRD3365	13640

Electronic Overload Relay - TeSys Deca Series



- Conformance to IEC, UL, CSA
- Range : 0.1A to 32A
- 5:1 Adjustment range
- High Operating Temperature
- Field selectable tripping class : 5, 10, 20 & 30
- Type 1 & Type 2 Co-ordination chart available

Current Range	For Use With	Reference*	Unit MRP [₹]
0.1...0.5		LR9D01	12795
0.4...2.0	LC1D09 - 38A Direct Mounting	LR9D02	13135
1.6...8.0		LR9D08	13135
6.4...32		LR9D32	14700

*Note: For LR9D01 to LR9D32 - Terminal Block for Clip on Mounting LAD7B205.

Electronic Overload Relay - TeSys Giga Series



- Wide range of protection with only 4 references (28A to 630A)
- Switchable protection against ground fault and phase imbalance
- ON status and overload alarm signaling by LED
- Direct mounting of relay with contactors saving in panel space and installation time
- Selectable Trip class from 5E to class 30E to suit different application needs

Thermal Protection Adjustment Range	Reference	Unit MRP [₹]
28...115 A	LR9G115	22805
57...225 A	LR9G225	26610
125...500 A	LR9G500	31295
160...630 A	LR9G630*	on request

*Note:

- For LRD01...LRD35 - Terminal Block for clip-on Mounting LAD7B106
- For LRD33** - Terminal Block for clip-on Mounting LA7D3064 ✓
- For LRD332, LRD340, LRD350 & LRD365 - Connection block for separate mounting LAD96560
- The LRD relays can be used for AC or DC current up to 104A
- For long starting, Class 20 relays are available on request.
- Device for remote tripping and electrical reset is available on request.

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



- Reduced downtime
- Quick restoration
- Operational Safety
- Power Quality management

Electronic Overcurrent Relays

Digital EOCR

Protection

- Over Current-Definite & Inverse Time
- Under Current
- Phase Loss
- Phase Reversal
- Stall
- Jam
- Imbalance
- Earth Fault*

Diagnostic

- Trip Cause
- Fault History-3 Faults (Cause & Current Value)

Measurement

- Load Current
- Ground Current*
- Running Hours
- Load Current Bar Graph
- i-THD (Current Harmonic Distortion)

Other Features

- Modbus Communication*
- 4-20 mA output for Motor Current*
- Pre-Alarm Contact
- Suitable for 1 Φ & 3 Φ Motors
- Suitable for Low Frequency VFD Operation (10-100Hz)
- Available with Type-2

Analog EOCR

Protection

- Over current
- Phase loss
- Locked rotor

Other Features

- Easy installation, with DIN Rail and Panel Mounting compatibility
- Trip cause display
- Manual/Electrical reset
- Testing Provision through Test Button
- Suitable for 1 Φ & 3 Φ Motors

* In selected models

se.com/in

Digital EOCR



Digital EOCR Without Communication					
Current Range=0.5A-80A					
Control Voltage=100VAC-220VAC*					
Description	Display	Bottom Hole		Window Hole	
		Reference	Unit MRP [₹]	Reference	Unit MRP [₹]
Without Ground Fault Protection	Inbuilt	3DM2-WRDUHZ	24315	3DM2-WRDUWZ	24315
	Extended**	FDM2-WRDUHZ	26295	FDM2-WRDUWZ	26295
GF Protection with external CT	Inbuilt	3MZ2-WRAUHZ	24640	3MZ2-WRAUWZ	24640
	Inbuilt	3MZ2-WRCUHZ	24640	3MZ2-WRCUWZ	24640
	Extended**	FMZ2-WRAUHZ	29585	FMZ2-WRAUWZ	29585
	Extended**	FMZ2-WRCUHZ	29585	FMZ2-WRCUWZ	29585
GF Protection with inbuilt CT	Inbuilt	3BZ2-WRAUHZ	35770		
	Inbuilt	3BZ2-WRCUHZ	35770		
	Extended**	FBZ2-WRAUHZ	36345		
	Extended**	FBZ2-WRCUHZ	36345		

Digital EOCR with Modbus Communication					
Current Range=0.5A-80A					
Control Voltage=100VAC-220VAC*					
Description	Display	Bottom Hole		Window Hole	
		Reference	Unit MRP [₹]	Reference	Unit MRP [₹]
Without Ground Fault Protection	Inbuilt	I3DM-WRDUHZ	39065	I3DM-WRDUWZ	39065
	Extended**	IFDM-WRDUHZ	39320	IFDM-WRDUWZ	39320
GF Protection with external CT	Inbuilt	I3MZ-WRAUHZ	41545	I3MZ-WRAUWZ	41545
	Inbuilt	I3MZ-WRCUHZ	41545	I3MZ-WRCUWZ	41545
	Extended**	IFMZ-WRAUHZ	47055	IFMZ-WRAUWZ	47055
	Extended**	IFMZ-WRCUHZ	47055	IFMZ-WRCUWZ	47055
GF Protection with inbuilt CT	Inbuilt	I3BZ-WRAUHZ	48140		
	Inbuilt	I3BZ-WRCUHZ	48140		
	Extended**	IFBZ-WRAUHZ	48390		
	Extended**	IFBZ-WRCUHZ	48390		

* Replace **U** with **B** in above reference for Control Voltage =24 V DC
 ** Cable need to be purchased separately
 Contact Customer Care for 4-20mA Output EOCR references & prices

EOCR Accessories

Cable for Extended Display			
Description	Reference	Unit MRP [₹]	
	CABLE-RJ45 1 Meter	CABLE-RJ45-001	2825
	CABLE-RJ45 3 Meter	CABLE-RJ45-003	3690

ZCT - Ground Fault Protection			
Description	Reference	Unit MRP [₹]	
	ZCT 35 M/M	ZCT-035-Z	7775
	ZCT 80 M/M	ZCT-080-Z	10475
	ZCT 120 M/M	ZCT-120-Z	17230

External CT for range extension up to 400A				
Current Range	CT Ratio	Reference	Unit MRP [₹]	
	100A	100:5	3CT-H1-100-Z	6190
	150A	150:5	3CT-HH-150-Z	7665
	200A	200:5	3CT-H2-200-Z	8535
	300A	300:5	3CT-H3-300-Z	8905
	400A	400:5	3CT-H4-400-Z	10475

Spare Display		
Description	Reference	Unit MRP [₹]
EOCR-PDMZ Display	EOCR-PDMZ	11610

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Protect

Analog EOCR

EOCR SS

- Without Display



Analog EOCR without Display			
Current Range (A)	Control Voltage	Reference	Unit MRP [₹]
0.5-6	24-240V AC/DC	EOCRSS-05S	7705
0.5-6	380-440V AC	EOCRSS-05W	6310
3-30	24-240V AC/DC	EOCRSS-30S	7705
3-30	380-440V AC	EOCRSS-30W	6310
5-60	24-240V AC/DC	EOCRSS-60S	7705
5-60	380-440V AC	EOCRSS-60W	6310

Note: 2 SPST output contacts
For 60A or higher, combine 05T Type and an external CT (secondary 5A) for use

EOCR SSD

- With Display (Operating Current & Trip Cause)



Analog EOCR with Display			
Current Range (A)	Control Voltage	Reference	Unit MRP [₹]
0.5-6	24-240V AC/DC	EOCRSSD-05S	11525
0.5-6	380-440V AC	EOCRSSD-05W	14195
3-30	24-240V AC/DC	EOCRSSD-30S	11525
3-30	380-440V AC	EOCRSSD-30W	12300
10-60	24-240V AC/DC	EOCRSSD-60S	11525
10-60	380-440V AC	EOCRSSD-60W	12300

Note: 2 SPST output contacts
For 60A or higher, combine 05T Type and an external CT (secondary 5A) for use

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025



TeSys Power

Circuit breakers for motor protection and control

TeSys Deca and TeSys Giga Circuit Breakers provide compact, reliable and efficient solutions:

- Isolation
- Protection against short circuits and overloads
- Conforming to global standards.(IEC/EN/UL/CSA)



TeSys Power

Circuit Breakers for Motor Protection

Magnetic Circuit Breaker



- Conformance to IEC 60947 -1,-2,-4
- Magnetic circuit breakers range from 0.1-80 Amps
- High Breaking capacity up to 100kA
- Wide range of accessories

Breaking Capacity at 50Hz		Magnetic Protection Rating (A)	Reference	Unit MRP [₹]
690V	500V			

With Rocker Lever Control (Economy)*

100 kA	100 kA	0.4	GV2LE03	6065
		0.63	GV2LE04	6065
		1	GV2LE05	6065
		1.6	GV2LE06	6065
3 kA	100 kA	2.5	GV2LE07	6065
		4	GV2LE08	6065
3 kA	50 kA	6.3	GV2LE10	6065
	10 kA	10	GV2LE14	6065
3 kA	6 kA	14	GV2LE16	6065
		18	GV2LE20	7045
3 kA	4 kA	25	GV2LE22	7045
		32	GV2LE32	11965

With Rotary Handle Control*

100 kA	100 kA	0.4	GV2L03	6960
		0.63	GV2L04	6960
		1	GV2L05	6960
		1.6	GV2L06	6960
4 kA	100 kA	2.5	GV2L07	6960
		4	GV2L08	6960
		6.3	GV2L10	6960
		10	GV2L14	6960
4 kA	10 kA	14	GV2L16	6960
		18	GV2L20	6960
		25	GV2L22	6960
		32	GV2L32	6960
6 kA	12 kA	40	GV3L40	19725
		50	GV3L50	20190
		65	GV3L65	20630
		73	GV3L73	23325

Breaking Capacity at 415V 50Hz	Motor Power AC-3** kW	HP	Thermal Protection Adjustment Range	Reference	Unit MRP [₹]
--------------------------------	-----------------------	----	-------------------------------------	-----------	--------------

With Toggle Control

50 kA	75	101	150	C16N3MA150	On Request
	110	147	220	C25N3MA220	On Request
	160	214	320	C40N31M320	On Request
	200	268	500	C63N31M500	On Request

Thermal Magnetic Circuit Breaker



- Conformance to IEC 60947 -1,-2,-4, conformity to International Standards - UL, CSA, CE
- Thermal magnetic circuit breakers range from 0.1-220 Amps
- High Breaking capacity up to 100kA
- Wide range of accessories
- S-shaped busbar for side-by-side connection with 40 - 65A Contactor

Breaking Capacity at 50Hz		Thermal Protection Adjustment Range	Reference	Unit MRP [₹]
690V	500V			

With Push Button Control (Economy)

100 kA	100 kA	0.1 - 0.16	GV2ME01	6295
		0.16 - 0.25	GV2ME02	6295
		0.25 - 0.40	GV2ME03	6295
		0.40 - 0.63	GV2ME04	6705
		0.63 - 1.0	GV2ME05	6705
3 kA	100 kA	1.0 - 1.6	GV2ME06	6850
		1.6 - 2.5	GV2ME07	6850
		2.5 - 4	GV2ME08	7090
3 kA	50 kA	4 - 6.3	GV2ME10	7090
	10 kA	6 - 10	GV2ME14	7090
3 kA	6 kA	9 - 14	GV2ME16	7940
		13 - 18	GV2ME20	8550
		17 - 23	GV2ME21	9130
3 kA	4 kA	20 - 25	GV2ME22	9130
		24 - 32	GV2ME32	14785

With Rotary Handle Control

100 kA	100 kA	0.1 - 0.16	GV2P01	6160
		0.16 - 0.25	GV2P02	6160
		0.25 - 0.40	GV2P03	6160
		0.40 - 0.63	GV2P04	7060
		0.63 - 1.0	GV2P05	7060
8 kA	100 kA	1.0 - 1.6	GV2P06	7060
		1.6 - 2.5	GV2P07	7060
		2.5 - 4	GV2P08	7280
6 kA	100 kA	4 - 6.3	GV2P10	7280
	50 kA	6 - 10	GV2P14	7770
	42 kA	9 - 14	GV2P16	9540
4 kA	10 kA	13 - 18	GV2P20	11010
		17 - 23	GV2P21	11010
		20 - 25	GV2P22	11010
		24 - 32	GV2P32	18560

With Rotary Handle Control

6 kA	12 kA	30...40	GV3P40	21895
		37...50	GV3P50	27145
		48...65	GV3P65	27845
		62...73	GV3P73	28455

With Direct Rotary Handle

10 kA	50 kA	70...150	GV5P150H	51875
		100...220	GV5P220H	60510
		160...320	GV6P320H	77815
		250...500	GV6P500H	107210

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Power

Circuit Breakers for Motor Protection

Accessories for Motor Circuit Breakers

Description	Reference	Unit MRP [₹]
For GV2		
Front contact NO or NC ⁽¹⁾	GVAE1	1365
Front contact NO + NC	GVAE11 ☒	1665
	GVAE20	1840
Side contact NO + NC	GVAN11 ☒	2010
	GVAN20	2010
Fault signalling contact + 1NO contact ⁽²⁾	GVAD1010 ☒	2620
Fault signalling contact + 1NC contact ⁽²⁾	GVAD1001	2620
Short circuit signalling contact block 1 C/O	GVAM11	2505
Under voltage trip	110 ... 115V 50Hz	GVAU115 5320
	220 ... 240V 50Hz	GVAU225 4785
	380 ... 400V 50Hz	GVAU385 4785
Shunt trip	110 ... 115V 50Hz	GVAS115 4785
	220 ... 240V 50Hz	GVAS225 4785
	380 ... 400V 50Hz	GVAS385 4785
Additive limiter for increasing breaking capacity to 100kA for GV2ME and GV2P.	GV1L3	7715
Connection block - GV2 with contactor LC1-D09..D38	GV2AF3	935
Connection block - LS1 D32 or GV2 with Contactor LC1-K or LP1-K	GV2AF01	1015
Empty enclosure for GV2ME - plastic	GV2MP02	4475
	GV2MC02	4915

(1) Choice of NC or NO contact operation depending on which way round the reversible block is mounted.

(2) The GV-AD is always mounted next to the circuit breaker.

Busbars

Connection Pitch	No. of Tapoff Points	Reference	Unit MRP [₹]
For GV2			
45 mm	2	GV2G245	2635
	4	GV2G445	4145
54 mm	2	GV2G254	2395
	3	GV2G354	2685
	4	GV2G454	3365
	5	GV2G554	3645
72 mm	4	GV2G472	4125

Description	Reference	Unit MRP [₹]
Accessories for Busbars		
Terminal block - to supply one or more 3-pole busbar GV2	GV2G05	5170
Protective end covers for unused busbar outlets	GV1G10	910
Terminal block for connection from top	GV1G09	2700

Accessories for Motor Circuit Breakers

Description	Reference	Unit MRP [₹]
For GV2-P/GV2-L		
External operator - IP54, Black	GV2APN01 ☒	4745
External operator - IP54, Yellow/Red	GV2APN02	8835
For GV3P/GV3L		
Auxiliary Contacts		
Front contact: 1 NO (fault) + 1NC (Auxiliary)	GVAED011	1730
Front contact: 1 NO (fault) + 1NO (Auxiliary)	GVAED101	1900
Busbar		
3-pole, 3 tap, 64 mm pitch	GV3G364	2530
S-shape bus bar	GV3S	1895
External Operator		
IP54, Black	GV3APN01	5720

Note: All other accessories are same as of GV2.

Busbars GV3G364 and GV3S are not compatible with GV3*73 and GV3*80.

Description	Operating Voltage	Reference	Unit MRP [₹]
For GV5 and GV6			
Clip-on connector - upto 150 A - 1.5..95 mm ²	-	GV7AC021	1655
Clip-on connector- upto 220 A - 1.5..185 mm ²	-	GV7AC022	2280
Front rotary handle GV7AP GV7R - black handle ⁽²⁾	-	GV7AP01	11995
Terminal shields IP405 ⁽¹⁾	-	GV7AC01	4265

(1) Terminal shields cannot be used together with spreaders.

(2) For mounting direct rotary handle on enclosure door.

This accessory makes it possible to open the door if the device is closed and prevents the device from being closed if the door is open.


It is recommended to check with Customer care team for selection, recommendation, and availability of stockable and non stockable references

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025


TeSys

Accessories compatibility

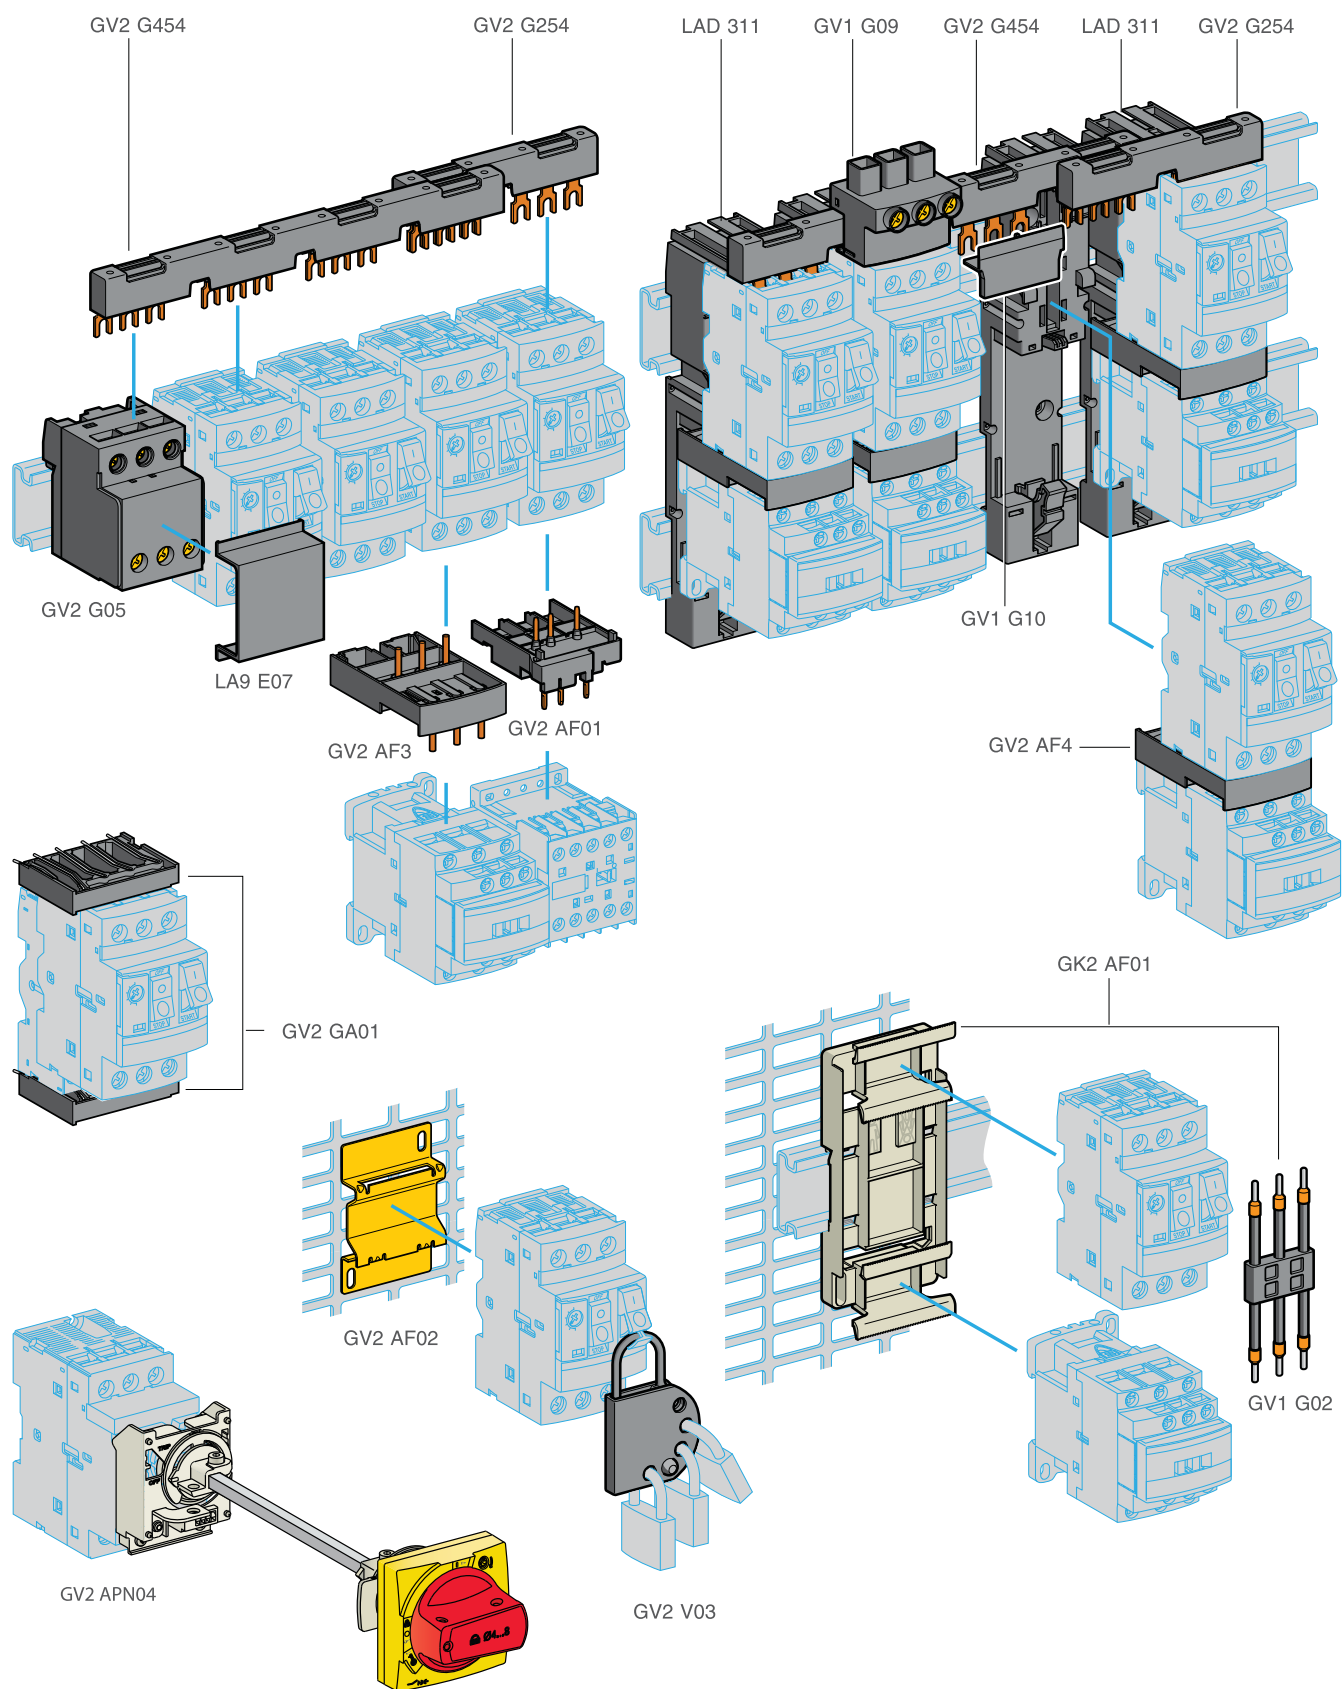

TeSys

Accessories compatibility

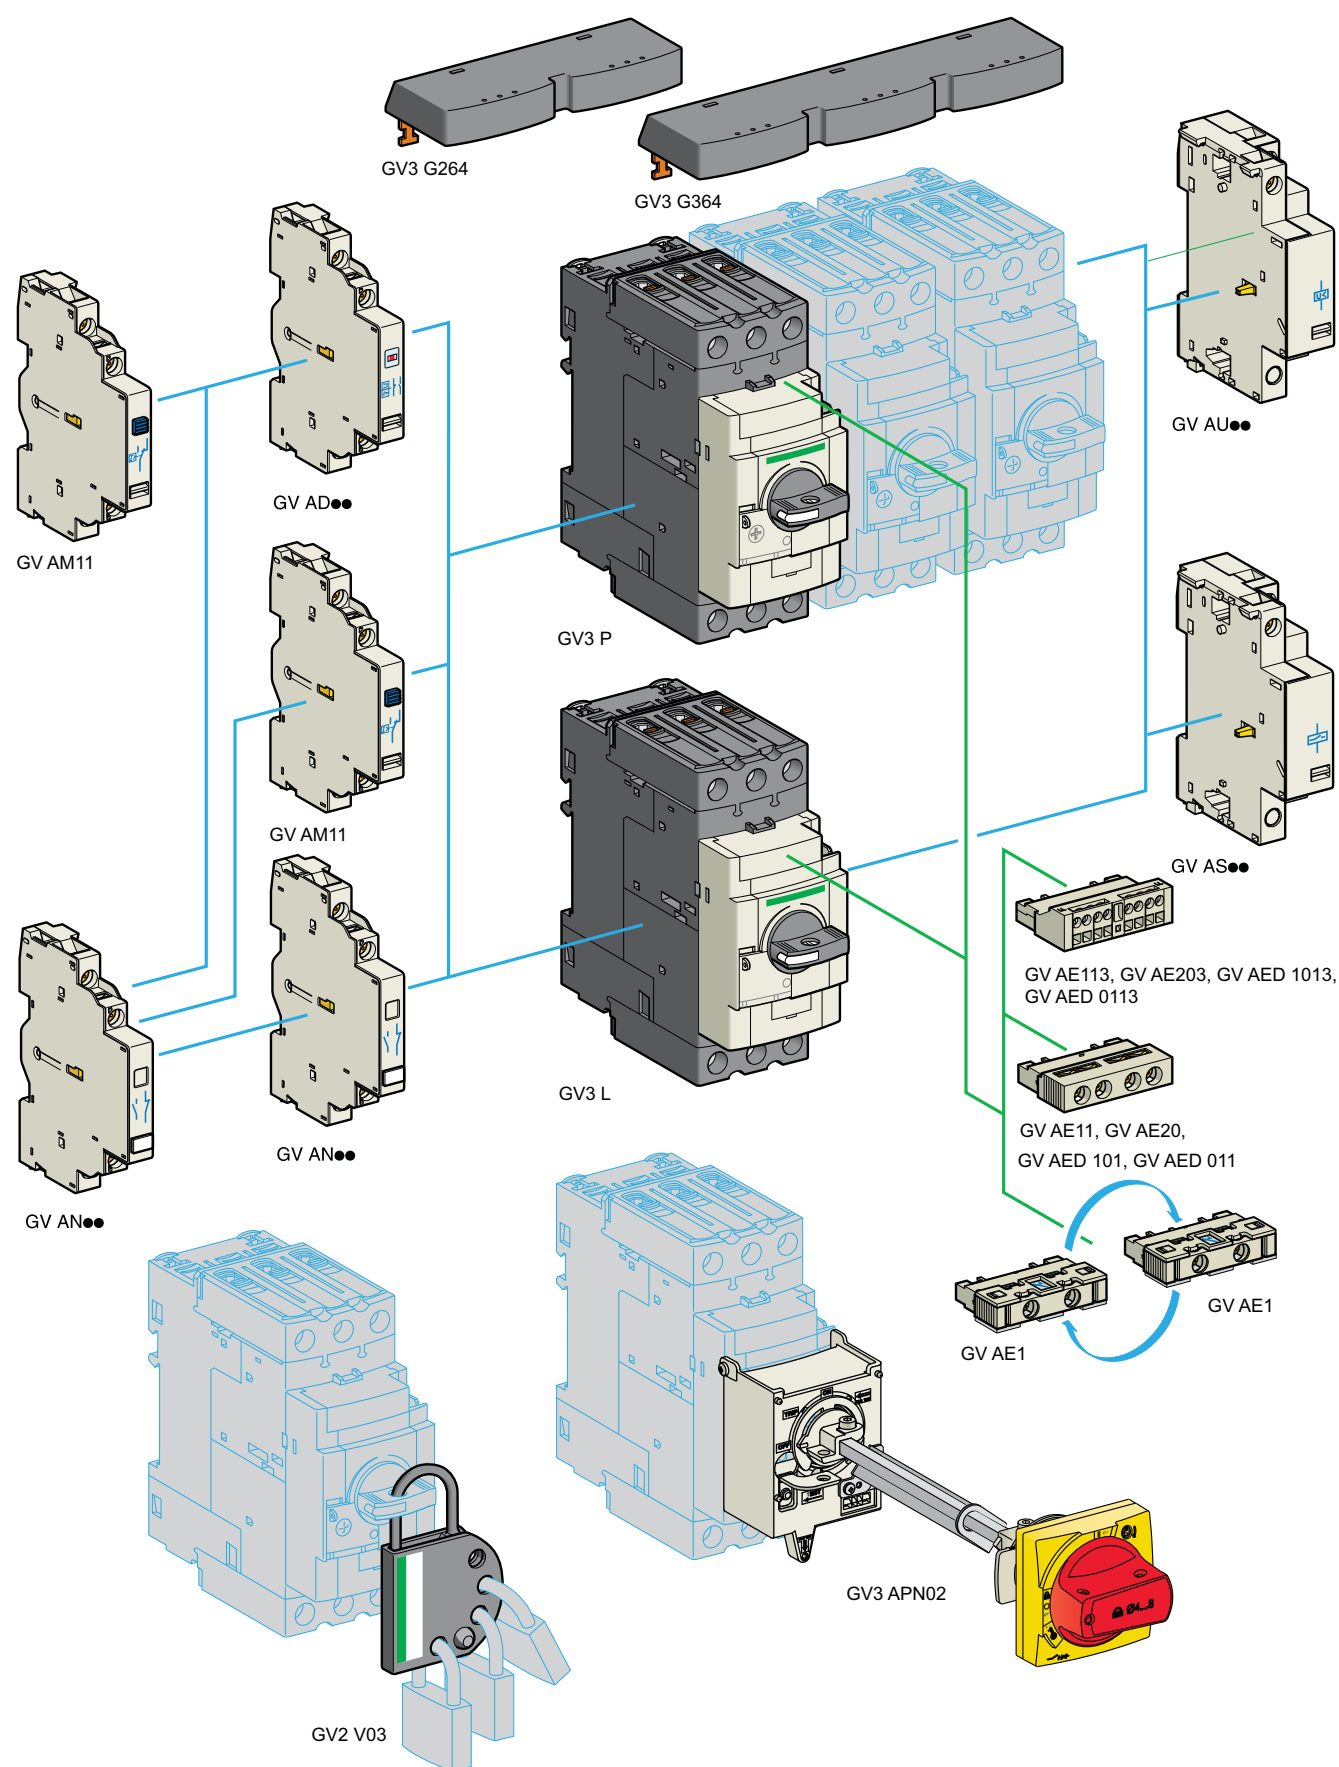

TeSys Control

TeSys Switches

Vario Switch Disconnectors

[Ithe] Conventional Thermal Current**	Poles Description	Rated Operational Power (AC-23)*	Reference	Unit MRP [₹]
Complete Enclosed Switches				
• Range 12 to 175A, IP 65 Sealable and Lockable				
10	3P	4 kW	VCF02GE	4620
16	3P	5.5 kW	VCF01GE	5020
20	3P	7.5 kW	VCF0GE	6110
25	3P	11 kW	VCF1GE	6550
32	3P	15 kW	VCF2GE	7675
50	3P	22 kW	VCF3GE	11870
63	3P	30 kW	VCF4GE	13890

* Rated Power at 415V

** Ith in enclosure

For Switch Type (Amps)	Mounting Arrangement	Ingress	Reference	Unit MRP [₹]
Operators (Padlockable)				
12 - 40	4 Screw Fixing	IP65	KCF1PZ	1365
63 - 80	4 Screw Fixing	IP65	KCF2PZ	1445
125 - 175	4 Screw Fixing	IP40	KCF3PZ	5845

Vario Switch Disconnectors

[Ithe] onventional Thermal Current**	Poles Description	Reference	Unit MRP [₹]
Complete Switch with Padlockable Operator			
• Suitable for Front Mounting or Base Mounting			
12	3P	VCF02	2900
20	3P	VCF01	3155
25	3P	VCF0	3680
32	3P	VCF1	3855
40	3P	VCF2	4780
63	3P	VCF3	10015
80	3P	VCF4	8105
125	3P	VCF5	18575
175	3P	VCF6	22515

Switch Bodies

12	V02	1890
20	V01	2180
25	V0	2590
32	V1	3155
40	V2	3855
63	V3	5370
80	V4	7060
125	V5	14325
175	V6	18290

Accessories

Description	For Use with Switch Bodies	Rating in A	Pole Composition	Earth Contact	Auxiliary Contacts	Reference	Unit MRP [₹]
Vario Add-on Modules ⁽¹⁾							
Main Pole Module	V02/VCF02	12	1P	-	-	VZ02	1355
	V01/VCF01	20	1P	-	-	VZ01	1375
	V0/VCF0	25	1P	-	-	VZ0	1470
	V1/VCF1	32	1P	-	-	VZ1	1430
	V2/VCF2	40	1P	-	-	VZ2	1535
	V3/VCF3	63	1P	-	-	VZ3	1995
	V4/VCF4	80	1P	-	-	VZ4	1995
Neutral Pole Module ⁽²⁾	V02 / VCF02 to V2 / VCF2	-	1N	-	-	VZ11	1650
	V3 / VCF3 to V4 / VCF4	-	1N	-	-	VZ12	2205
	V5 / VCZ5 to V6 / VCZ6	-	1N	-	-	VZ13	4555
Earthing Module	V02 / VCF02 to V2 / VCF2	-	-	-	-	VZ14	1620
	V3 / VCF3 to V4 / VCF4	-	-	1	-	VZ15	1915
	V5 / VCZ5 to V6 / VCZ6	-	-	1	-	VZ16	2975
Auxiliary Contact Block Module	V02/ VCF02 to V6 / VCZ6	-	-	-	1NO + 1NC	VZ7	1695
	V2/ VCF02 to V6 / VCZ6	-	-	-	2NO	VZ20	1695

(1) For mounting option of modules, please refer to the technical catalogue.

(2) With early make and late break contacts

Description	For Use With	Reference	Unit MRP [₹]
Components for Door Interlocking			
Shaft extension - for Mini-VARIO and VARIO - V02..V2	V02...V2	VZ17	1620
	V02...V2	VZ30	1915
Shaft extension - for Mini-VARIO and VARIO - V3 V4 V5 V6	V3, V4, V5, V6	VZ18	1915
	V3, V4, V5, V6	VZ31	2180
Door interlock plate	VZ17 / VZ30	KZ32	580
	VZ18/31	KZ74	995
Input Terminal Protection Shrouds			
Terminal Shrouds	V02 - V2	VZ8	550
	V3 - V4	VZ26	480
	V3 - V4	VZ9	575
	V5 - V6	VZ27	480
	V5 - V6	VZ10	725
	V02 - V6	VZ28	810
	V02 - V6	VZ29	665


Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

TeSys Control

Accessories for Switches

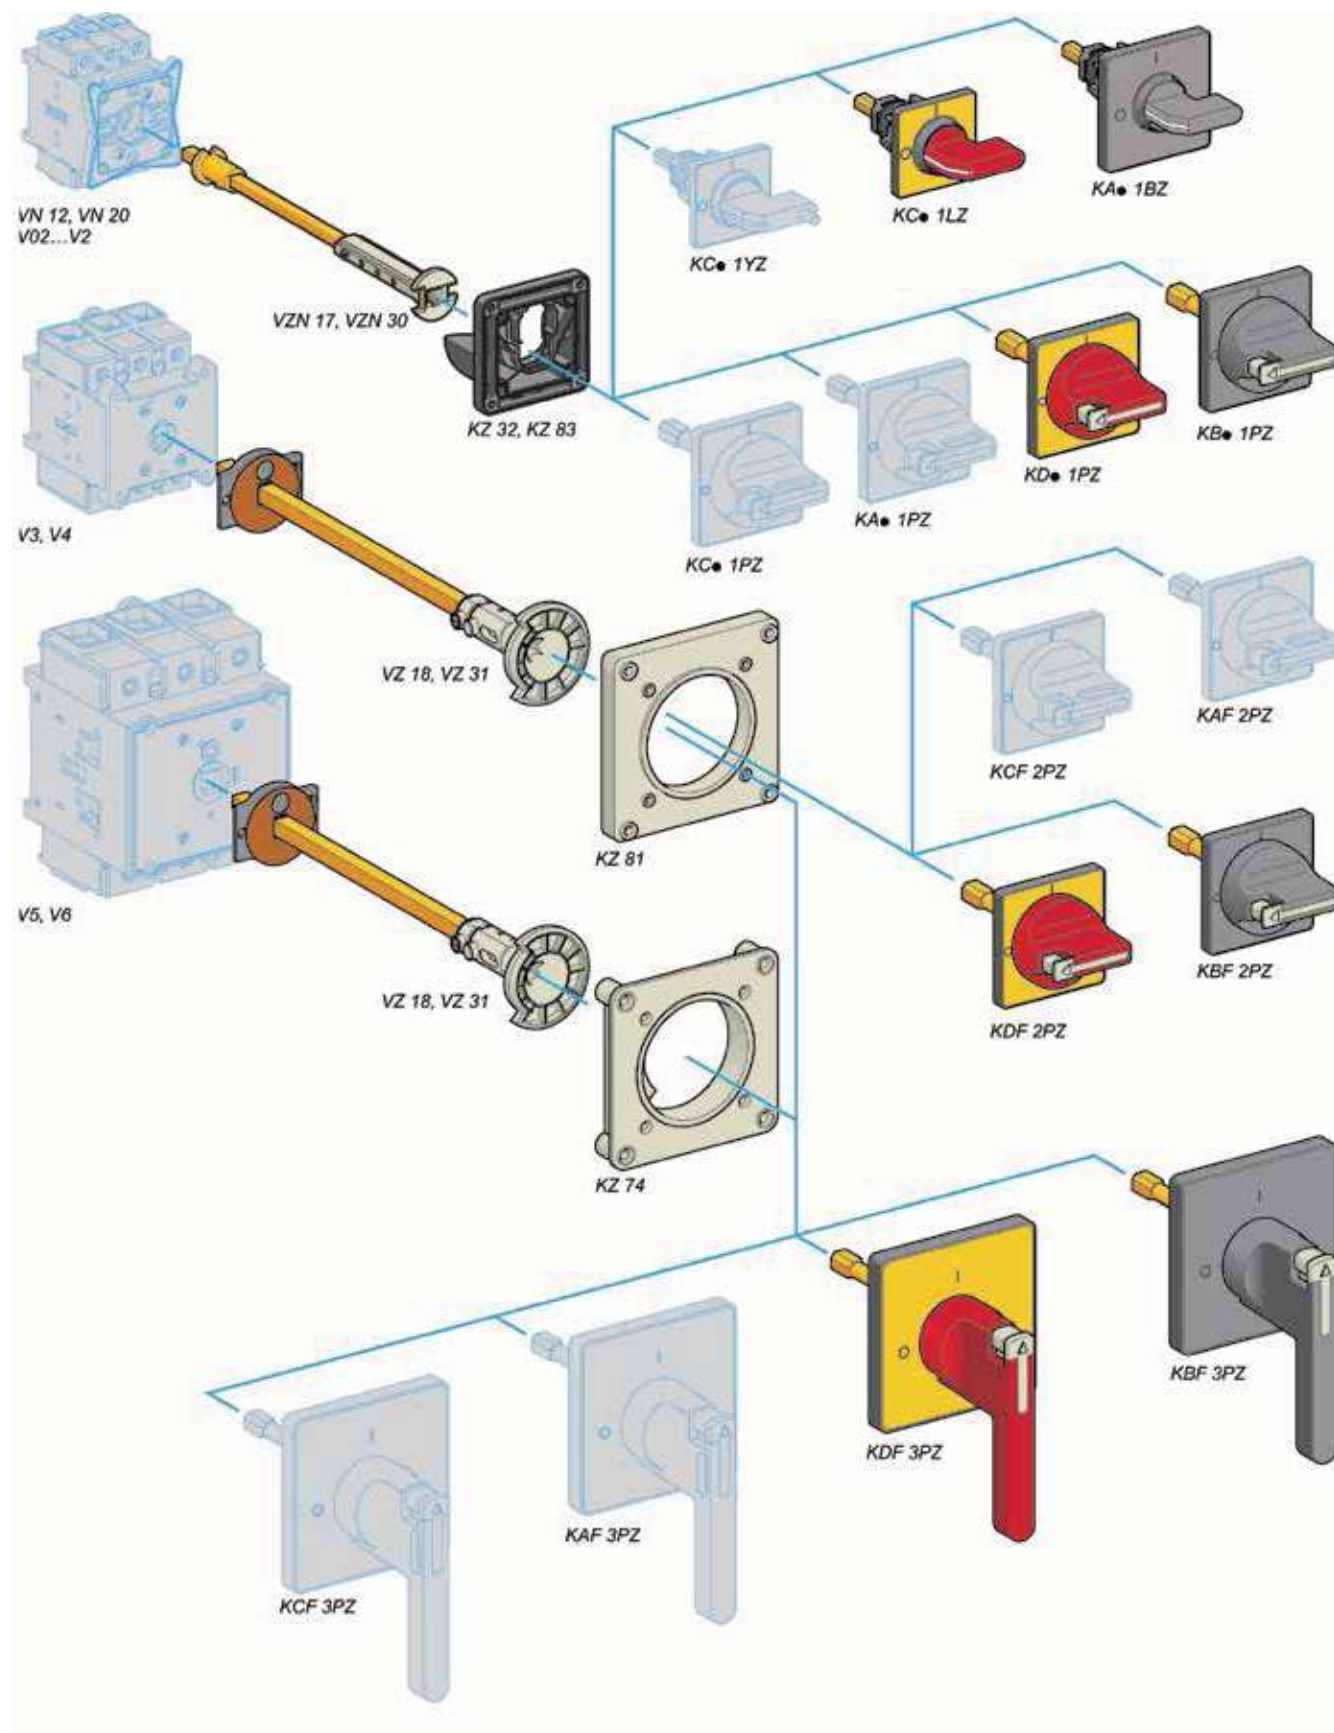



Smarter Load Management with TeSys Island

The Key to Unprecedented Efficiency

Digital Load Manager

TeSys Island - the innovative & digital multifunctional load management solution up to 80A

Industry 4.0

Predictive Maintenance

Cyber Secure



TeSys Active

TeSys Island

•All-in-one Solution for Versatile & Flexible Load Management•

Motor Protection


- Motor Overload
- Over/Under Current
- Jam/Stall
- Long Start
- Rapid Restart Lockout

Upstream Protection

- Phase Loss
- Phase Reversal
- Phase Unbalance
- Ground Current Detection

Analytics

- Health Diagnostic
- Energy Management
- Demand Management

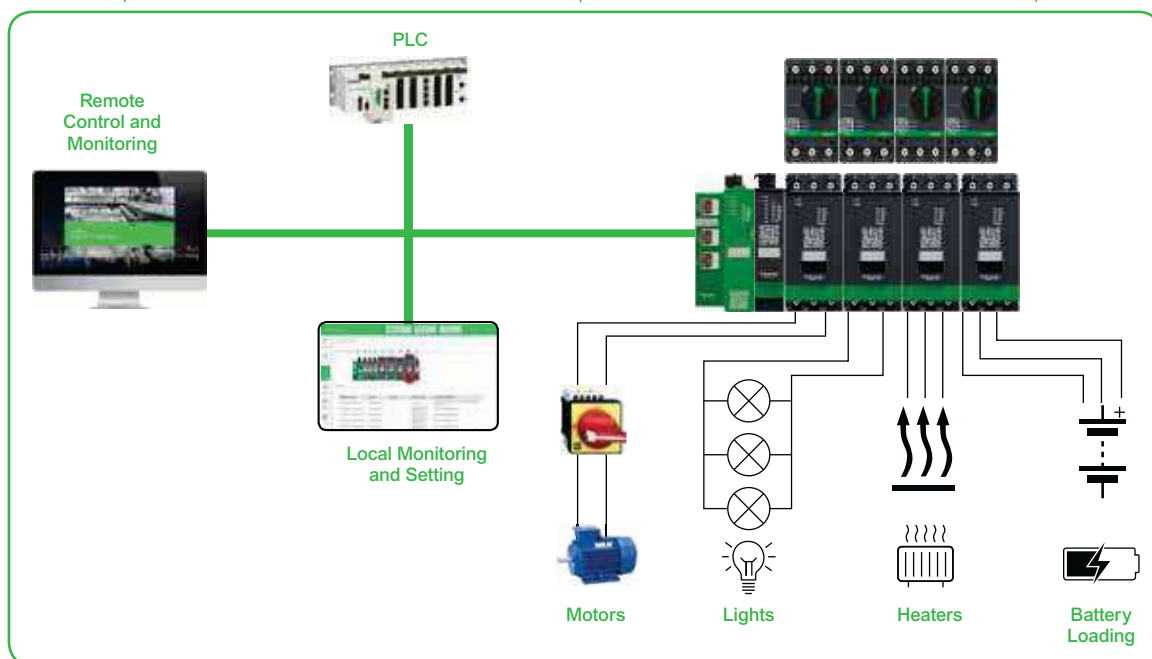

Designation	Product Specification	Commercial Reference
TeSys island components		
Standard Starter	9A (AC-3)	TPRST009
Standard Starter	25A (AC-3)	TPRST025
Standard Starter	38A (AC-3)	TPRST038
Standard Starter	65A (AC-3)	TPRST065
Standard Starter	66A (AC-3) - 80A (AC-1)	TPRST080
SIL Starter	9A (AC-3)	TPRSS009
SIL Starter	25A (AC-3)	TPRSS025
SIL Starter	38A (AC-3)	TPRSS038
SIL Starter	65A (AC-3)	TPRSS065
SIL Starter	66A (AC-3) - 80A (AC-1)	TPRSS080
Power interface module	9A (AC-3)	TPRPM009
Power interface module	38A (AC-3)	TPRPM038
Power interface module	80A (AC-3)	TPRPM080
Voltage interface module		TPRVM001
SIL interface module		TPRSM001
Digital I/O module	(4 input - 2 output)	TPRDG4X2
Analog I/O module	(2 input -1 output)	TPRAN2X1
Bus Coupler	EtherNet/IP - Modbus TCP	TPRBCEIP
Bus Coupler	PROFINET	TPRBCPFN
Bus Coupler	PROFIBUS	TPRBCPF8
Assembly and Wiring Kits		
Kit for reversing starter application	for 9, 25, 38A (size 1 and 2) starters	LAD9R1
Kit for reversing starter application	for 65, 80A (size 3) starters	LAD9R3
Jumper bar 3-pole for Star Delta application	for 9, 25, 38A (size 1 and 2) starters	LAD9P3
Kit for reversing starter application	for 65, 80 A (size 3) starters, a hazard sticker is provided	LAD9SD3S

*Architecture shown above is only for graphical representation

TeSys Control

Ultra motor starters

Introduction

From traditional
solution



Ultra motor starter- All in one
block for advance protection

Motor circuit breaker:
GV2L



Magnetic protection
> short-circuit protection

Contactor:
LC1D



Control
> Start /Stop

Status monitoring
> signaling
> alarm monitoring

Protection relay:
LRD



Thermal protection
> overload




Ultra motor starter

> All basic or advanced
protection and control
functions in one block

and more...

- > Overload indication and
alarm
- > Status report, remote control
via communication bus



**Ultra motor
starters**

can be used in

80 %

of motor protection
and control
applications.

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

ComPact NSX

Schneider Electric is proud to introduce the new generation of ComPacT MCCBs. These breakers talk to you, wherever you are, in all transparency. New design complements new wireless connectivity capabilities with our latest wireless auxiliary contact.

ComPact Design



New signature design

- Schneider Electric green signature style for the entire ComPacT range
- Estimated 40% reduction of wiring time for panel builders
- Experience easier installation thanks to a new ergonomic front-plate design
- Gain the confidence that all auxiliaries are on the right spot, and simply double check that you have the right coil rating
- Ergonomic new toggle for easier breaker manual operation


Wireless Auxiliary Contact



Wireless breaker status

- Plug & play technology for clear connection status (0 or 1, no half-way wired)
- Placed in the same position as the wired version, its LED light will give you direct indication in case of a tripping
- If you are away, your ComPacT will send you an immediate notification via EcoStruxure Facility Expert for instance
- Wireless auxiliary accelerates overall wiring time: status communication is done very simply and commissioned wirelessly
- Communication architecture is fully EcoStruxure Power validated, with any application

Ready to meet the new face of ComPacT?



Meet the new generation of ComPacT™ circuit breakers with semi-transparent faceplate, screwless auxiliaries and remote monitoring features.

Learn about the benefits of the ComPacT range here:
se.com/compact-nsx

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

EasyPact CVS

Fixed Thermal Magnetic Trip Unit (TMD)



- Ics = 100% Icu as per IEC 60947-2
- Suitable for Isolation
- Transparent Cover for trip unit as Standard
- Class II front face
- Single frame size 16-250A

Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
EasyPact CVS 100 to 630A Overload Setting (Ir) 0.7 - 1 x In					
36kA	16A	LV510330 ☒	12570	LV510340	15700
	25A	LV510331 ☒	12570	LV510341	15700
	32A	LV510332 ☒	12570	LV510342 ☒	15700
	40A	LV510333 ☒	12570	LV510343 ☒	15700
	50A	LV510334 ☒	12570	LV510344	15700
	63A	LV510335 ☒	12570	LV510345 ☒	15700
	80A	LV510336 ☒	12570	LV510346	15700
	100A	LV510337 ☒	12570	LV510347 ☒	15700
	125A	LV516332 ☒	13960	LV516342	17330
	160A	LV516333 ☒	18490	LV516343	22020
	200A	LV525332	26630	LV525342 ☒	32990
Breaking Capacity as per IEC 60947-2	Rated Current	Three Pole Reference	Unit MRP [₹]	Four Pole Reference	Unit MRP [₹]
36kA	250A	LV525333	29530	LV525343 ☒	36550
	320A	LV540305	40030	LV540308 ☒	49660
	400A	LV540306	40260	LV540309 ☒	50100
	500A	LV563305 ☒	45640	LV563308 ☒	57800
	630A	LV563307 ☒	52260	LV563310 ☒	65960

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMSW.E.F. July 15th, 2025

EasyPact CVS

Auxiliary Contacts (Changeover) Multifunction

Description	Reference	Unit MRP [₹]
OF or SD or SDE or SDV	29450	1140
OF or SD or SDE or SDV low level	29452	1380
SDE adaptor for trip unit TM or MA or Micrologic 2 \$\$	LV429451	1050

\$\$ To be considered alongwith SDE contact for MCCB with TMD/MA./Micrologic 2 protection.

Voltage Releases

Description	Shunt Release Reference	Unit MRP [₹]	Undervoltage Reference	Unit MRP [₹]
AC				
220-240 V 50/60 Hz	LV429387	3440	LV429407	4260

Installation Accessories

Description	Upto 100A only Reference	Unit MRP [₹]	160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Spreaders & Phase Barriers						
Spreaders (Set of 3) 3P	LV431563_IN	650	LV431563	820	32492 / LV432492	2100
Spreaders (Set of 4) 4P	LV431564_IN	880	LV431564	1080	32493 / LV432493	2630
Phase Barriers (Set of 6)	*		*		LV432570	1070

Rotary Handles

Description	100/160/250A Reference	Unit MRP [₹]	400/630A Reference	Unit MRP [₹]
Direct rotary handle				
Standard black handle	LV429337	1660	LV432597	2500
Extended rotary handle				
Standard extended rotary handle	LV429338_IN	2280	LV432598_IN	4050

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

AC Miniature Circuit Breakers - xC60 - IS/IEC 60898-1



Green Premium

- Breaking Capacity as per IEC 60898 and IS/IEC 60898-1, Icn = 10kA
- Can be used for DC application upto 60V per pole
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
B curve								
6	A9N1P06BGN ✓	474	A9N2P06BGN ✓	1430	A9N3P06BGN ✓	2373	-	-
10	A9N1P10BGN ✓	474	A9N2P10BGN ✓	1430	A9N3P10BGN ✓	2373	-	-
16	A9N1P16BGN ✓	474	A9N2P16BGN ✓	1430	A9N3P16BGN ✓	2373	-	-
20	A9N1P20BGN ✓	474	A9N2P20BGN ✓	1430	-	-	-	-
25	A9N1P25BGN ✓	474	-	-	A9N3P25BGN ✓	2373	-	-
32	A9N1P32BGN ✓	474	-	-	A9N3P32BGN ✓	2373	A9N4P32BGN	3197
40	A9N1P40BGN ✓	1028	-	-	-	-	A9N4P40BGN	4602
63	A9N1P63BGN ✓	1042	-	-	A9N3P63BGN ✓	3644	A9N4P63BGN	4644
C curve								
1	A9N1P01CGN ✓	726	A9N2P01CGN ✓	1980	A9N3P01CGN ✓	3125	A9N4P01CGN ✓	3933
2	A9N1P02CGN ✓	726	A9N2P02CGN ✓	1980	A9N3P02CGN ✓	3125	A9N4P02CGN ✓	3933
3	A9N1P03CGN ✓	726	A9N2P03CGN ✓	1980	A9N3P03CGN ✓	3125	-	-
4	A9N1P04CGN ✓	726	A9N2P04CGN ✓	1980	A9N3P04CGN ✓	3125	A9N4P04CGN ✓	3933
6	A9N1P06CGN ✓	430	A9N2P06CGN ✓	1430	A9N3P06CGN ✓	2373	A9N4P06CGN ✓	3197
10	A9N1P10CGN ✓	430	A9N2P10CGN ✓	1430	A9N3P10CGN ✓	2373	A9N4P10CGN ✓	3197
16	A9N1P16CGN ✓	430	A9N2P16CGN ✓	1430	A9N3P16CGN ✓	2373	A9N4P16CGN ✓	3197
20	A9N1P20CGN ✓	430	A9N2P20CGN ✓	1430	A9N3P20CGN ✓	2373	A9N4P20CGN ✓	3197
25	A9N1P25CGN ✓	430	A9N2P25CGN ✓	1430	A9N3P25CGN ✗	2373	A9N4P25CGN ✓	3197
32	A9N1P32CGN ✓	430	A9N2P32CGN ✓	1430	A9N3P32CGN ✗	2373	A9N4P32CGN ✓	3197
40	A9N1P40CGN ✓	1028	A9N2P40CGN ✓	2302	A9N3P40CGN ✓	3613	A9N4P40CGN ✓	4510
50	A9N1P50CGN	1028	A9N2P50CGN	2302	A9N3P50CGN	3613	A9N4P50CGN	4644
63	A9N1P63CGN ✓	1042	A9N2P63CGN ✓	2322	A9N3P63CGN ✓	3733	A9N4P63CGN ✓	4837
D curve								
2	A9N1P02DGN ✓	733	A9N2P02DGN ✓	2001	-	-	-	-
3	A9N1P03DGN ✓	733	-	-	A9N3P03DGN ✓	3173	-	-
4	A9N1P04DGN ✓	733	A9N2P04DGN ✓	2001	A9N3P04DGN ✓	3173	-	-
6	A9N1P06DGN ✓	618	A9N2P06DGN ✓	1499	A9N3P06DGN ✓	2499	-	-
10	A9N1P10DGN ✓	618	A9N2P10DGN ✓	1499	A9N3P10DGN ✓	2499	-	-
16	A9N1P16DGN ✓	618	A9N2P16DGN ✓	1499	A9N3P16DGN ✓	2499	A9N4P16DGN ✓	3315
20	A9N1P20DGN ✓	618	A9N2P20DGN ✓	1499	A9N3P20DGN ✓	2499	A9N4P20DGN ✓	3315
25	A9N1P25DGN ✓	618	A9N2P25DGN ✓	1499	A9N3P25DGN ✓	2499	A9N4P25DGN ✓	3315
32	A9N1P32DGN ✓	618	A9N2P32DGN ✓	1499	A9N3P32DGN ✓	2499	A9N4P32DGN ✓	3315
40	A9N1P40DGN ✓	1110	A9N2P40DGN ✓	2433	A9N3P40DGN ✓	3828	A9N4P40DGN ✓	4800
50	-	-	-	-	A9N3P50DGN	3828	-	-
63	A9N1P63DGN ✓	1124	A9N2P63DGN ✓	2462	A9N3P63DGN ✓	3862	A9N4P63DGN ✓	4850

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

AC Miniature Circuit Breakers - XC60 - IEC - 60947-2



Green Premium

- Breaking Capacity as per IEC 60947-2, Icn = 10kA
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading*
- Increased System Continuity: Discrimination*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
B curve								
6	A9N1P06BIN ✓	488	A9N2P06BIN ✓	1473	A9N3P06BIN ✓	2444	-	-
10	A9N1P10BIN ✓	488	A9N2P10BIN ✓	1473	A9N3P10BIN ✓	2444	-	-
16	A9N1P16BIN ✓	488	A9N2P16BIN ✓	1473	A9N3P16BIN ✓	2444	-	-
20	A9N1P20BIN ✓	488	A9N2P20BIN ✓	1473	-	-	-	-
25	A9N1P25BIN ✓	488	-	-	A9N3P25BIN ✓	2444	-	-
32	A9N1P32BIN ✓	488	-	-	A9N3P32BIN ✓	2444	A9N4P32BIN ✓	3293
40	A9N1P40BIN ✓	1059	-	-	-	-	A9N4P40BIN ✓	4740
63	A9N1P63BIN ✓	1074	-	-	A9N3P63BIN ✓	3754	A9N4P63BIN ✓	4784
C curve								
1	A9N1P01CIN ✓	748	A9N2P01CIN ✓	2040	A9N3P01CIN ✓	3219	A9N4P01CIN ✓	4051
2	A9N1P02CIN ✓	748	A9N2P02CIN ✓	2040	A9N3P02CIN ✓	3219	A9N4P02CIN ✓	4051
3	A9N1P03CIN ✓	748	A9N2P03CIN ✓	2040	A9N3P03CIN ✓	3219	-	-
4	A9N1P04CIN ✓	748	A9N2P04CIN ✓	2040	A9N3P04CIN ✓	3219	A9N4P04CIN ✓	4051
6	A9N1P06CIN ✓	443	A9N2P06CIN ✓	1473	A9N3P06CIN ✓	2444	A9N4P06CIN ✓	3293
10	A9N1P10CIN ✓	443	A9N2P10CIN ✓	1473	A9N3P10CIN ✓	2444	A9N4P10CIN ✓	3293
16	A9N1P16CIN ✓	443	A9N2P16CIN ✓	1473	A9N3P16CIN ✓	2444	A9N4P16CIN ✓	3293
20	A9N1P20CIN ✓	443	A9N2P20CIN ✓	1473	A9N3P20CIN ✓	2444	A9N4P20CIN ✓	3293
25	A9N1P25CIN ✓	443	A9N2P25CIN ✓	1473	A9N3P25CIN ✓	2444	A9N4P25CIN ✓	3293
32	A9N1P32CIN ✓	443	A9N2P32CIN ✓	1473	A9N3P32CIN ✓	2444	A9N4P32CIN ✓	3293
40	A9N1P40CIN ✓	1059	A9N2P40CIN ✓	2372	A9N3P40CIN ✓	3722	A9N4P40CIN ✓	4646
50	A9N1P50CIN ✓	1059	A9N2P50CIN ✓	2372	A9N3P50CIN ✓	3722	A9N4P50CIN ✓	4784
63	A9N1P63CIN ✓	1074	A9N2P63CIN ✓	2393	A9N3P63CIN ✓	3845	A9N4P63CIN ✓	4983
D curve								
2	A9N1P02DIN ✓	755	A9N2P02DIN ✓	2061	-	-	-	-
3	A9N1P03DIN ✓	755	-	-	A9N3P03DIN ✓	3269	-	-
4	A9N1P04DIN ✓	755	A9N2P04DIN ✓	2061	A9N3P04DIN ✓	3269	-	-
6	A9N1P06DIN ✓	637	A9N2P06DIN ✓	1545	A9N3P06DIN ✓	2575	-	-
10	A9N1P10DIN ✓	637	A9N2P10DIN ✓	1545	A9N3P10DIN ✓	2575	-	-
16	A9N1P16DIN ✓	637	A9N2P16DIN ✓	1545	A9N3P16DIN ✓	2575	A9N4P16DIN ✓	3415
20	A9N1P20DIN ✓	637	A9N2P20DIN ✓	1545	A9N3P20DIN ✓	2575	A9N4P20DIN ✓	3415
25	A9N1P25DIN ✓	637	A9N2P25DIN ✓	1545	A9N3P25DIN ✓	2575	A9N4P25DIN ✓	3415
32	A9N1P32DIN ✓	637	A9N2P32DIN ✓	1545	A9N3P32DIN ✓	2575	A9N4P32DIN ✓	3415
40	A9N1P40DIN ✓	1144	A9N2P40DIN ✓	2507	A9N3P40DIN ✓	3943	A9N4P40DIN ✓	4945
50	-	-	-	-	A9N3P50DIN ✓	3943	-	-
63	A9N1P63DIN ✓	1157	A9N2P63DIN ✓	2537	A9N3P63DIN ✓	3978	A9N4P63DIN ✓	4995

Note: * Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart

**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

DC Miniature Circuit Breakers - C60H



- Specially designed MCB for enhanced protection in DC installation
- Magnetic Arc Chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/ module	1 Pole Reference	Unit MRP [₹]	Module Width 18mm/ module	2 Pole Reference	Unit MRP [₹]
MOQ		12 Nos.		6 Nos.		
C60H-DC						
0.5	1	A9N61500	1873	2	A9N61520	4113
1	1	A9N61501 ✓	1366	2	A9N61521 ✓	2819
2	1	A9N61502 ✓	1366	2	A9N61522 ✓	2819
3	1	A9N61503 ✓	1366	2	A9N61523 ✓	2819
4	1	A9N61504 ✓	1366	2	A9N61524 ✓	2819
5	1	A9N61505	1366	2	A9N61525	2819
6	1	A9N61506 ✓	1122	2	A9N61526 ✓	2294
10	1	A9N61508 ✓	1122	2	A9N61528 ✓	2294
16	1	A9N61511 ✓	1122	2	A9N61531	2294
20	1	A9N61512 ✓	1122	2	A9N61532 ✓	2294
25	1	A9N61513 ✓	1122	2	A9N61533 ✓	2294
32	1	A9N61515 ✓	1293	2	A9N61535 ✓	2294
40	1	A9N61517 ✓	1538	2	A9N61537 ✓	3383
50	1	A9N61518 ✓	1538	2	A9N61538 ✓	3383
63	1	A9N61519 ✓	1538	2	A9N61539 ✓	3383

Special application MCBs



Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2



Rail Application* (including Rolling Stock)

- Fire & smoke Resistant – Level 2 (NF F 16-101, NF F 16-102)
- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Breaking Capacity: up to 25kA
- Complies to IEC / EN 60947-2



UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

*Rail Application RCDs are also available on demand **18mm/module

Residual Current Devices (RCDs) - For Human and Fire Protection



**30
mA**

Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India {CEA Amendment regulation 2015*}



Schneider Electric provides voltage independent RCDs which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.

**SI
Type**

Schneider Electric offers SI RCD built to operate in electrically polluted or installation in aggressive environments:

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

* for Measures relating to Safety and Electric supply

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ **NORMAL STOCK ITEMS**

W.E.F. July 15th, 2025

AC Residual Current Circuit Breakers - xID



- Complies to standards IEC/EN 61008-1 and IS 12640
- AC Class protection
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16201	4776	4	A9N16251	6704
	100	2	A9N16203	5301	4	A9N16253	7124
	300	2	A9N16202	5462	4	A9N16252	7334
40	30	2	A9N16204	5622	4	A9N16254	6599
	100	2	A9N16205	6061	4	A9N16255	7164
	300	2	A9N16206	6357	4	A9N16256	7440
63	30	2	A9N16208	6770	4	A9N16258	7642
	100	2	A9N16209	7281	4	A9N16259	8464
	300	2	A9N16210	7427	4	A9N16260	8503
80	30	2	A9N16212	11381	4	A9N16261	13480
	100	2	A9N16213	11570	4	A9N16262	13697
	300	2	A9N16214	11787	4	A9N16263	13770

AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to standards IEC 61008-1 and VDE 0664
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
4P	100	30	4	**A9R11491	-
		100	4	**A9R12491	-
	125	30	4	A9R11492	58072
		100	4	A9R12492	56541
		300	4	A9R14492	56805

Note: **For 100A RCCB Auxiliary kindly contact Customer Care

AC Residual Current Breaker Overload (RCBO) - DPN N Vig



- Complies to standards IEC/EN 61009
- AC Class Protection; Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19661	7585
		300	2	A9N19681	7704
	10	30	2	A9N19663	7585
		300	2	A9N19683	7704
	16	30	2	A9N19665	7585
		300	2	A9N19685	7704
	20	30	2	A9N19666	7585
		300	2	A9N19686	7704
	25	30	2	A9N19667	7585
		300	2	A9N19687	7704
	32	30	2	A9N19668	7585
		300	2	A9N19688	8088
	40	30	2	A9N19669	9596
		300	2	A9N19689	9763

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities

Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to standard IEC/EN 61008-1
- SI RCDs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16234	11111	4	A9N16321	12383
40	30	2	A9N16237	11670	4	A9N16324	12774
63	30	2	A9N16240	12006	4	A9N16327	13116
63	300	2	A9N16246	12096	4	-	-

Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



Suitable for
ComReady
Auxiliary

- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	1.5	A9N26581	8748	3	A9N26595	10027
	100	1.5	A9N26582	9995	3	A9N26596	10176
	300	1.5	A9N26583	10568	3	A9N26597	10952
63	30	2	A9N26611	10987	3.5	A9N26643	11028
	100	2	A9N26612	11635	3.5	A9N26644	11454
	300	2	-	-	3.5	A9N26645	11984

Note: Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI



Suitable for
ComReady
Auxiliary



- Complies to standard IEC/EN 61009
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19631	15100
	10	30	2	A9N19632	15100
	16	30	2	A9N19634	15100
		300	2	A9N19644	15100
	25	30	2	A9N19636	15100
	32	30	2	A9N19637	15100
	40	30	2	A9N19638	17879
		300	2	A9N19648	19896

*For Prices, please contact nearest Schneider Electric Sales Office or Customer Care Center are Center for Reference and Prices


Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Common Auxiliaries for xC60 / C120 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

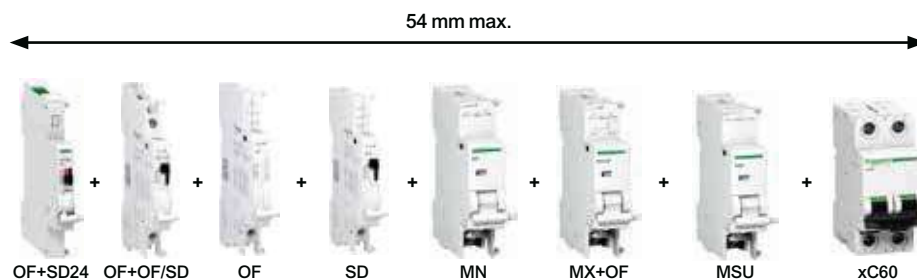

Type	Module Width 18mm/module	Reference	Unit MRP [₹]
Indication Auxiliaries			
Acti9 A9A iOF bottom wiring 0.1-6A aux	0.5	A9N26904	1484
Acti9 A9N SD bottom wiring 0.1-6A aux	0.5	A9N26907	1817
Acti9 A9N OF/SD+OF top/bt wir 0.1-6A aux	0.5	A9N26909	4627
Acti9 A9A iOF bottom wiring 0.1-6A aux	0.5	A9A26904	1519
Acti9 A9A iOF/SD+OF t&b wire 0.1-6A aux	0.5	A9A26909	4916
Acti9 A9N OF+SD 24V DC Ti24 term on top	0.5	A9N26899	4073
Protection Auxiliaries – Trip Indication on front face			
Voltage Release MN 220-240V AC DC Ghost		A9N26960	6544
Voltage Release MSU 270V AC	1	A9N26500	7749
Tripping Auxiliaries – Trip Indication on front face			
Acti9 MX-OF 100-415VAC 110-130V DC Shunt	1	A9N26946	4257
MX Shunt Trip MX Plus 1 of 24V AC DC CCC		A9N26948	4257
Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs			
Auxiliary Contact 1 OCS	0.5	A9N26923	6233
Acti9 OFSP Auxiliary Contact	0.5	A9N16940	3070

Accessories



Type	Description	Reference	Unit MRP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	7050
Rotary Handle*	Extended, Disconnectable handle	27047	3560
Padlock** (bag of 2)		26970	1385
Multicable terminal for 3 copper cables**		19096	11459
Aluminum cable terminal**		27060	830
Spacer		A9N27062	350

* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only

**for xC60, xID, DPN N Vigi, C60H-DC, xSW, C60PV-DC

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

Comprehensive range

- To ensure the protection of equipment connected to:
- Low voltage networks,
- Telecommunications networks,
- Computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency

Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD “built-in” technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Surge Arresters - Type 1+ 2



- Complies to IEC 61643-1 and EN 61643-11
- Withdraw able type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Iimp up to 25kA & I_{max} upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [U_c]: 350V

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
PRD1 25r	1P	2	16329	24252
	1P + N	4	16330	43533
	3P	6	16331	68547
	3P + N	8	16332	85166

Surge Arresters iPRD - Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- In conformance with standards IEC 61643-11/2011 T2 and EN 61643-11 Type 2
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- I_{max} (8/20 s): 65/40/15/8kA
- Maximum Operating Voltage [U_c]: 340V
- Level of protection, U_p: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD8	230	1P	1	A9L08100	5941
	230	1P+N	2	A9L08500	11332
	230/400	3P	3	A9L08300	15295
	230/400	3P+N	4	A9L08600	23086
iPRD8r	230	1P+N	2	A9L08501	13585
	230/400	3P+N	4	A9L08601	27704
	230	1P	1	A9L20100	6659
iPRD20	230	1P+N	2	A9L20500	14245
	230/400	3P	3	A9L20300	18235
	230/400	3P+N	4	A9L20600	25781
	230	1P+N	2	A9L20501	16689
iPRD20r	230/400	3P+N	4	A9L20601	31525
	230	1P	1	A9L40100	8267
	230	1P+N	2	A9L40500	16407
iPRD40	230/400	3P	3	A9L40300	23550
	230/400	3P+N	4	A9L40600	32839
	230	1P	1	A9L40101	9256
	230	1P+N	2	A9L40501	21151
iPRD40r	230/400	3P	3	A9L40301	31693
	230/400	3P+N	4	A9L40601	39414
	230	1P	1	A9L65101	12374
	230	1P+N	2	A9L65501	26957
iPRD65r	230/400	3P	3	A9L65301	35177
	230/400	3P+N	4	A9L65601	45644

Spare Cartridges for iPRD



- Spare Cartridges for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These Cartridges are not compatible with Old SPD range (A9L16...)**

Type	Spare Cartridges for	Reference	Unit MRP [₹]
iPRD 65-350	iPRD65r	A9L65102	7901
iPRD 40-350	iPRD40, iPRD40r	A9L40102	6383
iPRD 20-350	iPRD20, iPRD20r	A9L20102	4872
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	6524

**Spare Cartridges for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Compliance to EN 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged Cartridges to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	17065
	3P	6.5	A9L16299	25590
	3P+N	7.5	A9L16300	31842
iQuick PRD 20r	1P+N	4	A9L16295	19510
	3P	6.5	A9L16296	30720
	3P+N	7.5	A9L16297	38211
Quick PRD 40r	1P+N	4	A9L16292	24403
	3P	6.5	A9L16293	36559
	3P+N	7.5	A9L16294	45435

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Photovoltaic Surge Arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged Cartridges to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD 40r	800	3	A9L40271	12975
	1000	3	A9L40281	15882

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
PRI	48 V DC	1	A9L16339	23606
PRC	130 V AC	1	A9L16337	14152

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC-22
- Impulse voltage: 6kV
- DC application: 48V (110V with 2 poles in series)
- Short circuit withstand 20 In for 1 second
- Upto 80A Bi connect terminals & 100A to 125A with mono connect terminals

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	40	2	6	A9S2P040	951
	63	2	6	A9S2P063	1257
3	40	3	4	A9S3P040	1662
	63	3	4	A9S3P063	1947
4	40	4	3	A9S4P040	2104
	63	4	3	A9S4P063	2291
	100	4	3	A9S4P100	3833
	125	4	3	A9S4P125	4236

Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	1	1 C/O	1	12	A9E18070	2035
	2	2 C/O	2	6	A9E18071	2798
	2	1NO + 1NC	1	12	A9E18072	1631
3	1	1 C/O	1	12	A9E18073	1868
	2	2 C/O	2	6	A9E18074	3376

iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit MRP [₹]
230V AC	1	A9A15322	2515

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ NORMAL STOCK ITEMS

W.E.F. July 15th, 2025

iCT Contactors



Suitable for
**ComReady
Auxiliary**

- Complies with standards IEC 1095, E N 61095
- 4 operating modes switch on front face :
 - Automatic mode
 - Temporary "ON" mode
 - Permanent "ON" mode
 - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit MRP [₹]
1P	25	1NO	1	A9C20731	2985
	16	2NO	1	A9C22712	3072
2P	25	2NO	1	A9C20732	3673
	40	2NO	2	A9C20842	7485
	63	2NO	2	A9C20862	8029
3P	25	3NO	2	A9C20833	4733
	40	3NO	2	A9C20843	10507
	63	3NO	3	A9C20863	11419
4P	25	4NO	2	A9C20834	4956
	40	4NO	2	A9C20844	12238
	63	4NO	3	A9C20864	12911
	63	2NO + 2NC	3	A9C20868	14382

Note: 100A Contactor in 2P / 4P - available on request

iTL Impulse Relays



Suitable for
**ComReady
Auxiliary**

- Complies with standards IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit MRP [₹]
1P	16	230-240 VAC	1NO	1	A9C30811	1935
	32	230-240 VAC	1NO	1	A9C30831	2436
2P	16	230-240 VAC	2NO	1	A9C30812	3174
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	7215
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	5769
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2 x A9C32836	11994
4P	16	230-240 VAC	4NO	2	A9C30814	6135
	32	230-240 VAC	4NO	2	A9C30831 + 3 x A9C32836	16773

iIL Indicator Lights



- Complies with standard IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit MRP [₹]
Single Indicator light	Red	1	A9E18320	2001
	Green	1	A9E18321	2001
	Blue	1	A9E18323	2001
	Orange	1	A9E18324	2001
3 phase voltage presence light	Red/Red/Red	1	A9E18327	5781
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	2695

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☒ **NORMAL STOCK ITEMS**

W.E.F. July 15th, 2025

Communication Auxiliaries



Description	Module Width	Reference	Unit MRP [₹]
OF+SD24	0.5	A9N26899	4073
iACT24	1	A9C15924	18734
iATL24	1	A9C15424	19726

Acti 9

Description	Reference	Pack	Unit MRP [₹]
Distribloc 63A			
Distribution from the top (4 Module)	04040	1	16350
Distribution through the bottom (4 Module)	04041	1	16350

Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2,
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width **	4.5 mod		5.5 mod		6.5 mod	
B Curve						
10	A9C61210	51536	-	-	-	-
C Curve						
10	A9C62210	54720	A9C62310	55466	A9C62410	58878
16	A9C62216	54720	A9C62316	56581	A9C62416	58878
25	A9C62225	52107	A9C62325	55466	A9C62425	58878
40	A9C62240	54881	-	-	A9C62440	64369
63	-	-	-	-	A9C62463	66044
D Curve						
25	-	-	-	-	A9C63425	61243

Note: **18mm/module

[illegible]

Note

Note

[illegible]

Life Is 

Schneider
Electric

Schneider Electric India Pvt. Ltd.

Corporate Office: 9th Floor, DLF Building No. 10, Tower C, DLF Cyber City, Phase II, Gurugram - 122002, Haryana
Tel: 0124 3940400, www.se.com/in

Ahmedabad

Schneider Electric India (P) Ltd.
1506-1507, 15th Floor Shapth-5
Opp.Karnavati Club, SG Highway,
Ahmedabad, Gujarat - 380015
Tel.: 079-66826701

Coimbatore

Schneider Electric India Pvt. Ltd.
Mikro Grafeio Services Pvt Ltd.,
Elysium Tower, #21, A.T.T
Colony, Near Honda Office,
Coimbatore, Tamil Nadu - 641018

Lucknow

Schneider Electric India (P) Ltd.
Summit, Plot No. TCG 3/3
6th Floor, 604A/B/C, Vibhuti Khand
Gomti Nagar, Lucknow
Uttar Pradesh - 226010
Tel.: 0522-3500334

Nashik

Schneider Electric India (P) Ltd.
401, 4th Floor, Rishi Raj Towers
Jehan Circle, Gangapur Road
Nashik - 422013
Tel.: 0253-2344333

Bengaluru

Schneider Electric India (P) Ltd.
No. 3/1, JP Techno Park
Mezzanine Floor, Millers Tank Bund
Road, Vasanth Nagar
Bengaluru - 560052
Tel.: 080-71481351

Hyderabad

Schneider Electric Pvt. Ltd.
4B-4th Floor, Gumidelli Towers,
Prakash Nagar, Begumpet,
Hyderabad - 500016

Ludhiana

Schneider Electric India (P) Ltd.
SCO 23, 2nd Floor,
Chandigarh Road, Sector 32
Ludhiana, Punjab -141010
Tel.: 0161- 5203011

New Delhi

Schneider Electric India (P) Ltd.
C-56, Mayapuri Industrial Area, Phase-2
New Delhi - 110064
Tel.: 011-61317400

Bhubaneswar

Schneider Electric India (P) Ltd.
Workloop Co-Working in the property
Office No. 316, Esplanade One Mall
Rasulgarh, Bhubaneswar - 751010

Indore

Schneider Electric India (P) Ltd.
219, Dhan Trident Building
Vijay Nagar, A.B.Road
Indore - 452001

Mohali

Schneider Electric India (P) Ltd.
2nd Floor, Tower-A
Bestech Business Tower
Mega Information & Technology Park
Industrial Plot No.1, Phase IX
(Expansion), Mohali - 160059
Tel.: 0172-7198200

Pune

Schneider Electric India (P) Ltd.
Amar Caliber, CTS No 911, BMCC Road,
OFF F.C. Road, Deccan Gymkhana,
Shivaji Nagar, Pune - 411007
Tel.: 020-67492500

Chennai

Schneider Electric India (P) Ltd.
No: 29, 2nd Floor,
Bannari Amman Towers, B-Block
Dr. Radhakrishnan Road, Mylapore
Chennai - 600 004
Tel.:044-71912000

Jaipur

Schneider Electric India (P) Ltd.
Jaipur Business Centre 309
3rd Floor, Sangam Tower 190
Church Road, Jaipur - 302001
Tel.: 0141-2374810

Mumbai

Schneider Electric Pvt. Ltd.
L&T Business Park, Tower B,
7th Floor, TC-II, Gate No.5,
Saki Vihar Road, Powai,
Mumbai - 400072

Vadodara

Schneider Electric India (P) Ltd.
Notus IT Park, 10th Floor, Block-D
Sarabhai Campus, Vadiwadi
Vadodara, Gujarat - 390017

Cochin

Schneider Electric India (P) Ltd.
Alapatt Properties Private Limited
(Trade Name: Centre A)
Main Door Number: 66/4971
(Old Door Number: 40/6584-H)
7th Floor Alapatt Heritage Building
MG Road Kochi - 682035

Kolkata

Schneider Electric (I) Pvt. Ltd.
BN3, Salt Lake, Sector V,
Kolkata - 700091

Nagpur

Schneider Electric India (P) Ltd.
6, Vasant Vihar Complex
W.H.C Road, Shankar Nagar
Nagpur - 440010
Tel.: 0712-2558581

Vishakhapatnam

Schneider Electric India (P) Ltd.
D.N.10-1-43, 1st Floor
Ratnam's Business Centre,
Siripuram Fort, C.B.M.Compound
Visakhapatnam - 530016
Tel.: 0891-6675500

Customer Care Centre

Monday-Saturday, 9 a.m. to 8 p.m.

Toll-free numbers: 1800 419 4272, 1800 103 0011

Email: customercare.in@schneider-electric.com

For more information, visit our website at: www.se.com/in

- All Prices are in Indian Rupees.
- Prices are subject to change without prior notice.
- Product evolution is a continuous process and Schneider Electric reserves the right to modify/withdraw any product at any time without prior notice.
- Prices charged will be as prevailing on the date of dispatch.
- Invoice Amount = (MRP – less Applicable discount) + Applicable GST %
- Tax incidence on invoices is basis applicable GST rates.
- Invoice amount not to exceed MRP.
- Product pictures shown are for illustration purpose only, actual product may vary.

Distributor